PACIFIC SURVEYS

SONIC VELOCITY VARIABLE DENSITY

Job No. 14771

Company U.S. GEOLOGICAL SURVEY
Well SDSW
Field CHULA VISTA
County SAN DIEGO State CA

Location:

3066 N. 2nd Ave
GPS: N32*39.547' W117*05.125'

Sec. Twp. Rge.

Other Services:

ELOG
CALIPER
GR/LL3

			Elevation above perm. datum	Elevation K.B. D.F. G.L.
Permanent Datum	G.L.			
Log Measured From	G.L.	0'		
Drilling Measured From	G.L.			

Date	7/20/2009		
Run Number	ONE		
Depth Driller	2000'		
Depth Logger	2003'		
Bottom Logged Interval	2002'		
Top Log Interval	0'		
Casing Driller	N/A		
Casing Logger	N/A		
Bit Size	7 7/8" @ 0-1728'	6 1/4" @ 1728-1821'	6 1/8" @ 1841-2000'
Type Fluid in Hole	BENTONITE		
Density / Viscosity	N/A		
pH / Fluid Loss	N/A		
Source of Sample	PIT		
Rm @ Meas. Temp	4.1 @ 77F		
Rmf @ Meas. Temp	4.5 @ 77F		
Rmc @ Meas. Temp	N/A		
Source of Rmf / Rmc	MEAS		
Rm @ BHT	N/A		
Time Circulation Stopped	3 HOURS		
Time Logger on Bottom	5:15 PM		
Max. Recorded Temperature	N/A		
Equipment Number	PS-1		
Location	L.A.		
Recorded By	ABREAU		
Witnessed By	A. BROWN		

<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

Database File: 14771.db
Dataset Pathname: SNC
Presentation Format: SLT
Dataset Creation: Mon Jul 20 20:45:57 2009 by Log Warrior Version 6.6
Charted by: Depth in Feet scaled 1:600

260	DT (usec/ft)	60	ITT (msec)	400	Variable Density 5 ft	1600	400	Variable Density 5 ft	1600
20	Gamma-Ray (GAPI)	220		0	RLL3 (Ohm-m)	50			

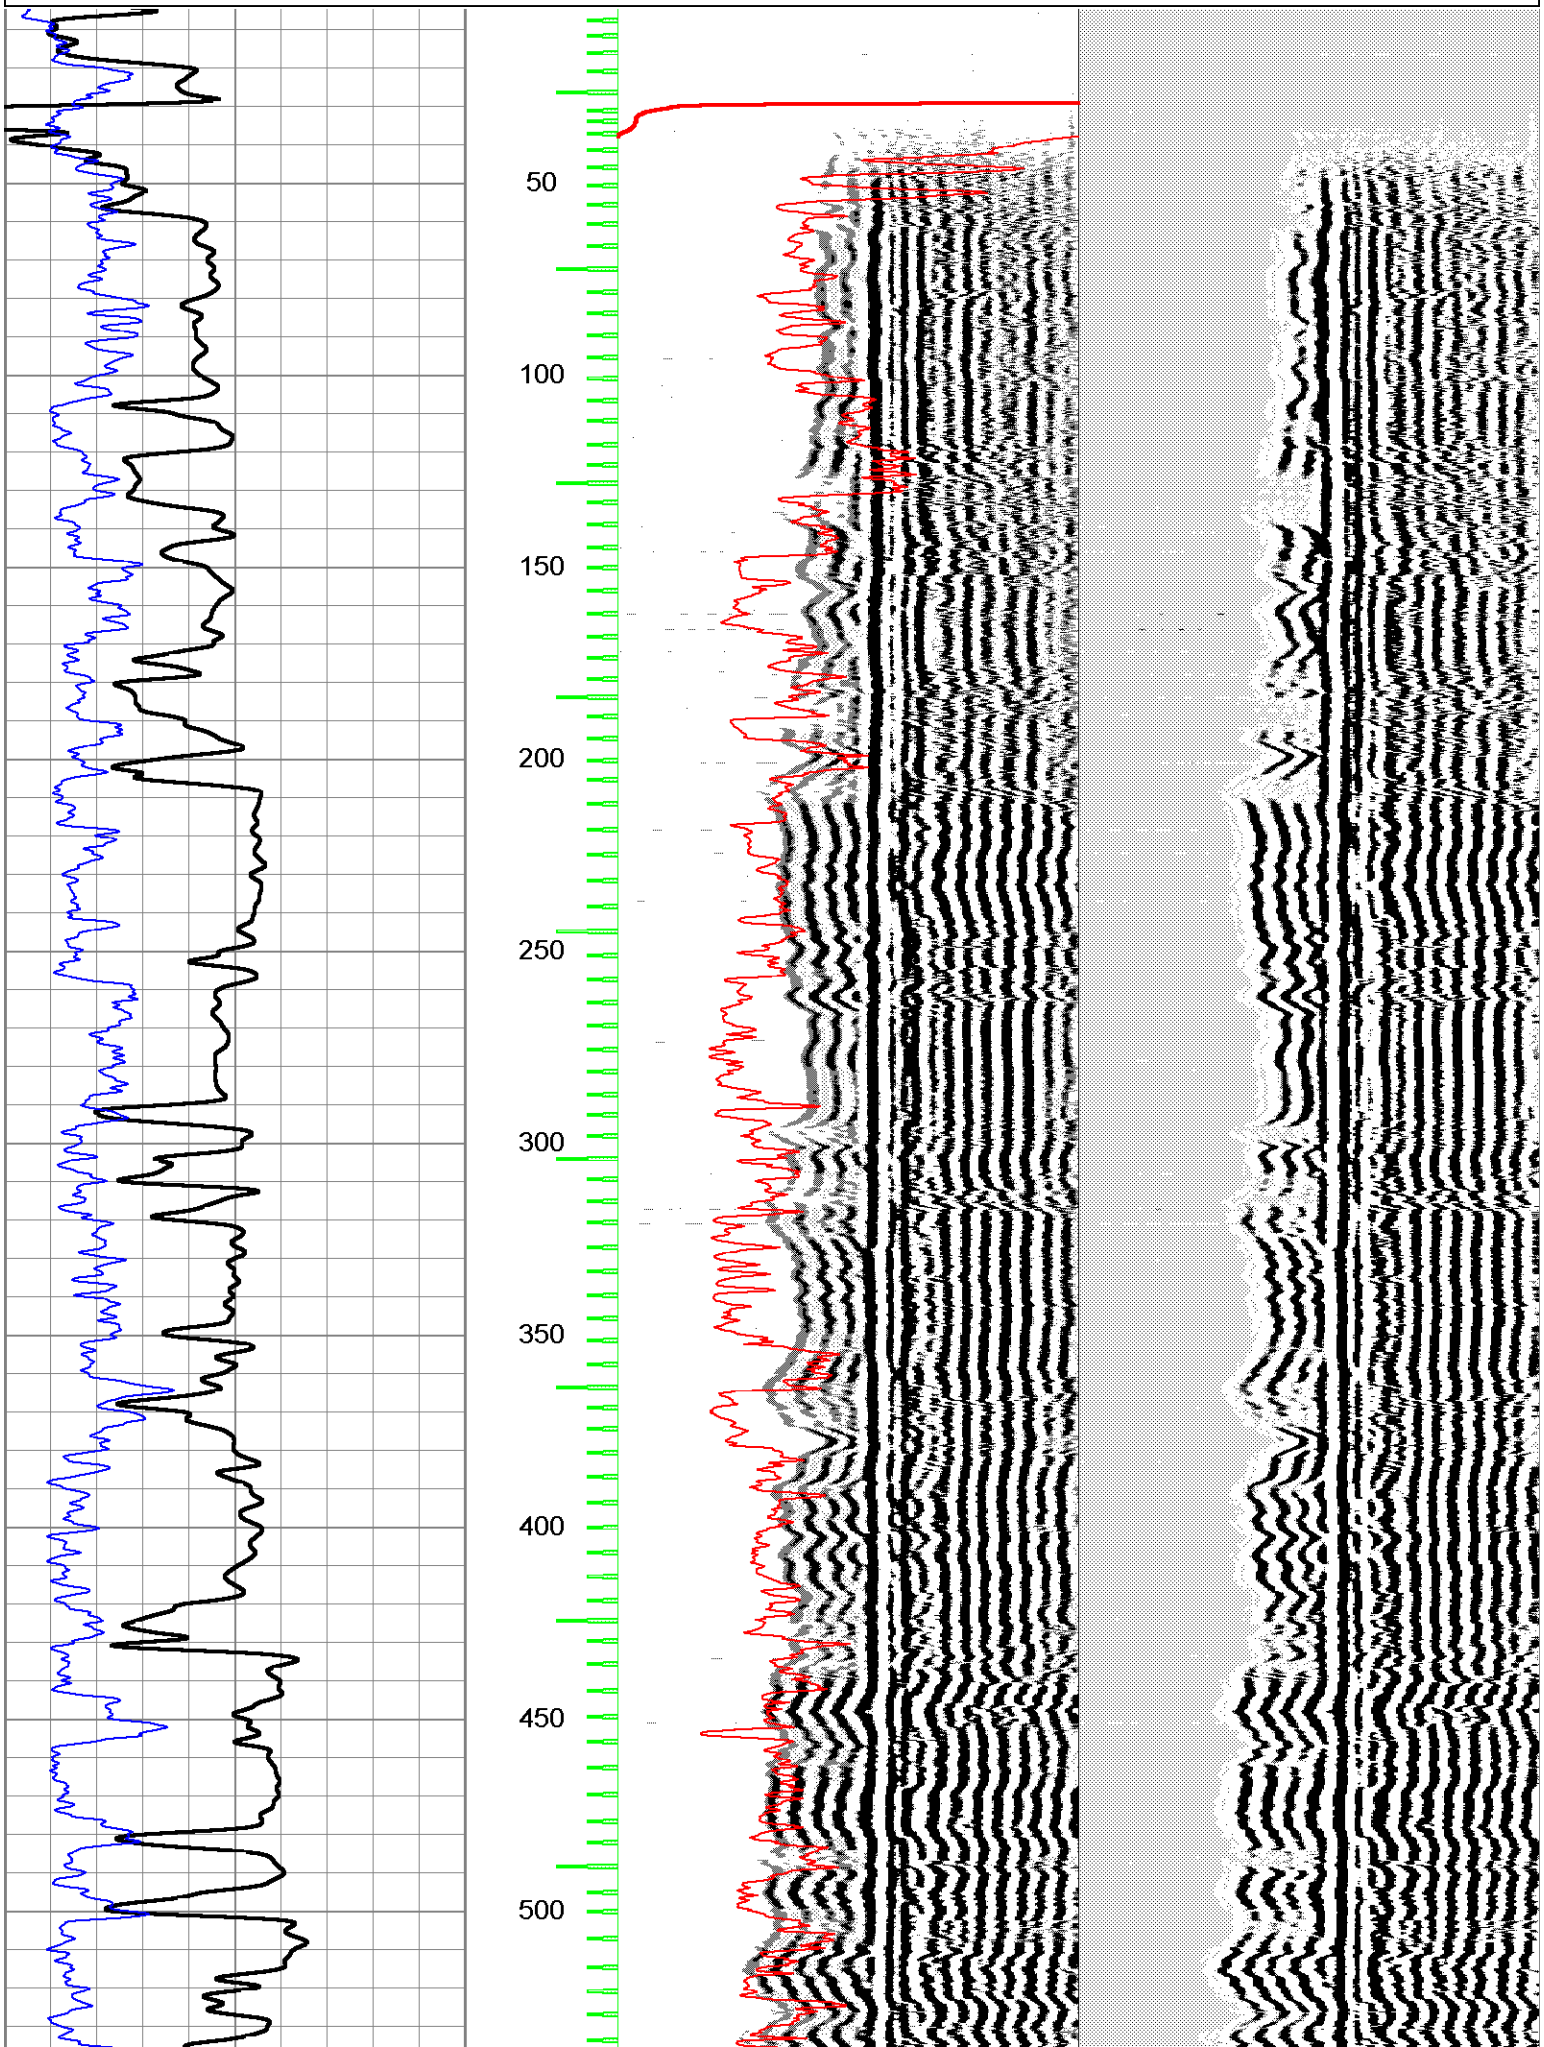
Gamma Ray (GAPI) 220
RLL3 (Ohm-m)
50 RLL3 back-up (Ohm-m) 500
50
100
150
200
250
300
350
400
450
500

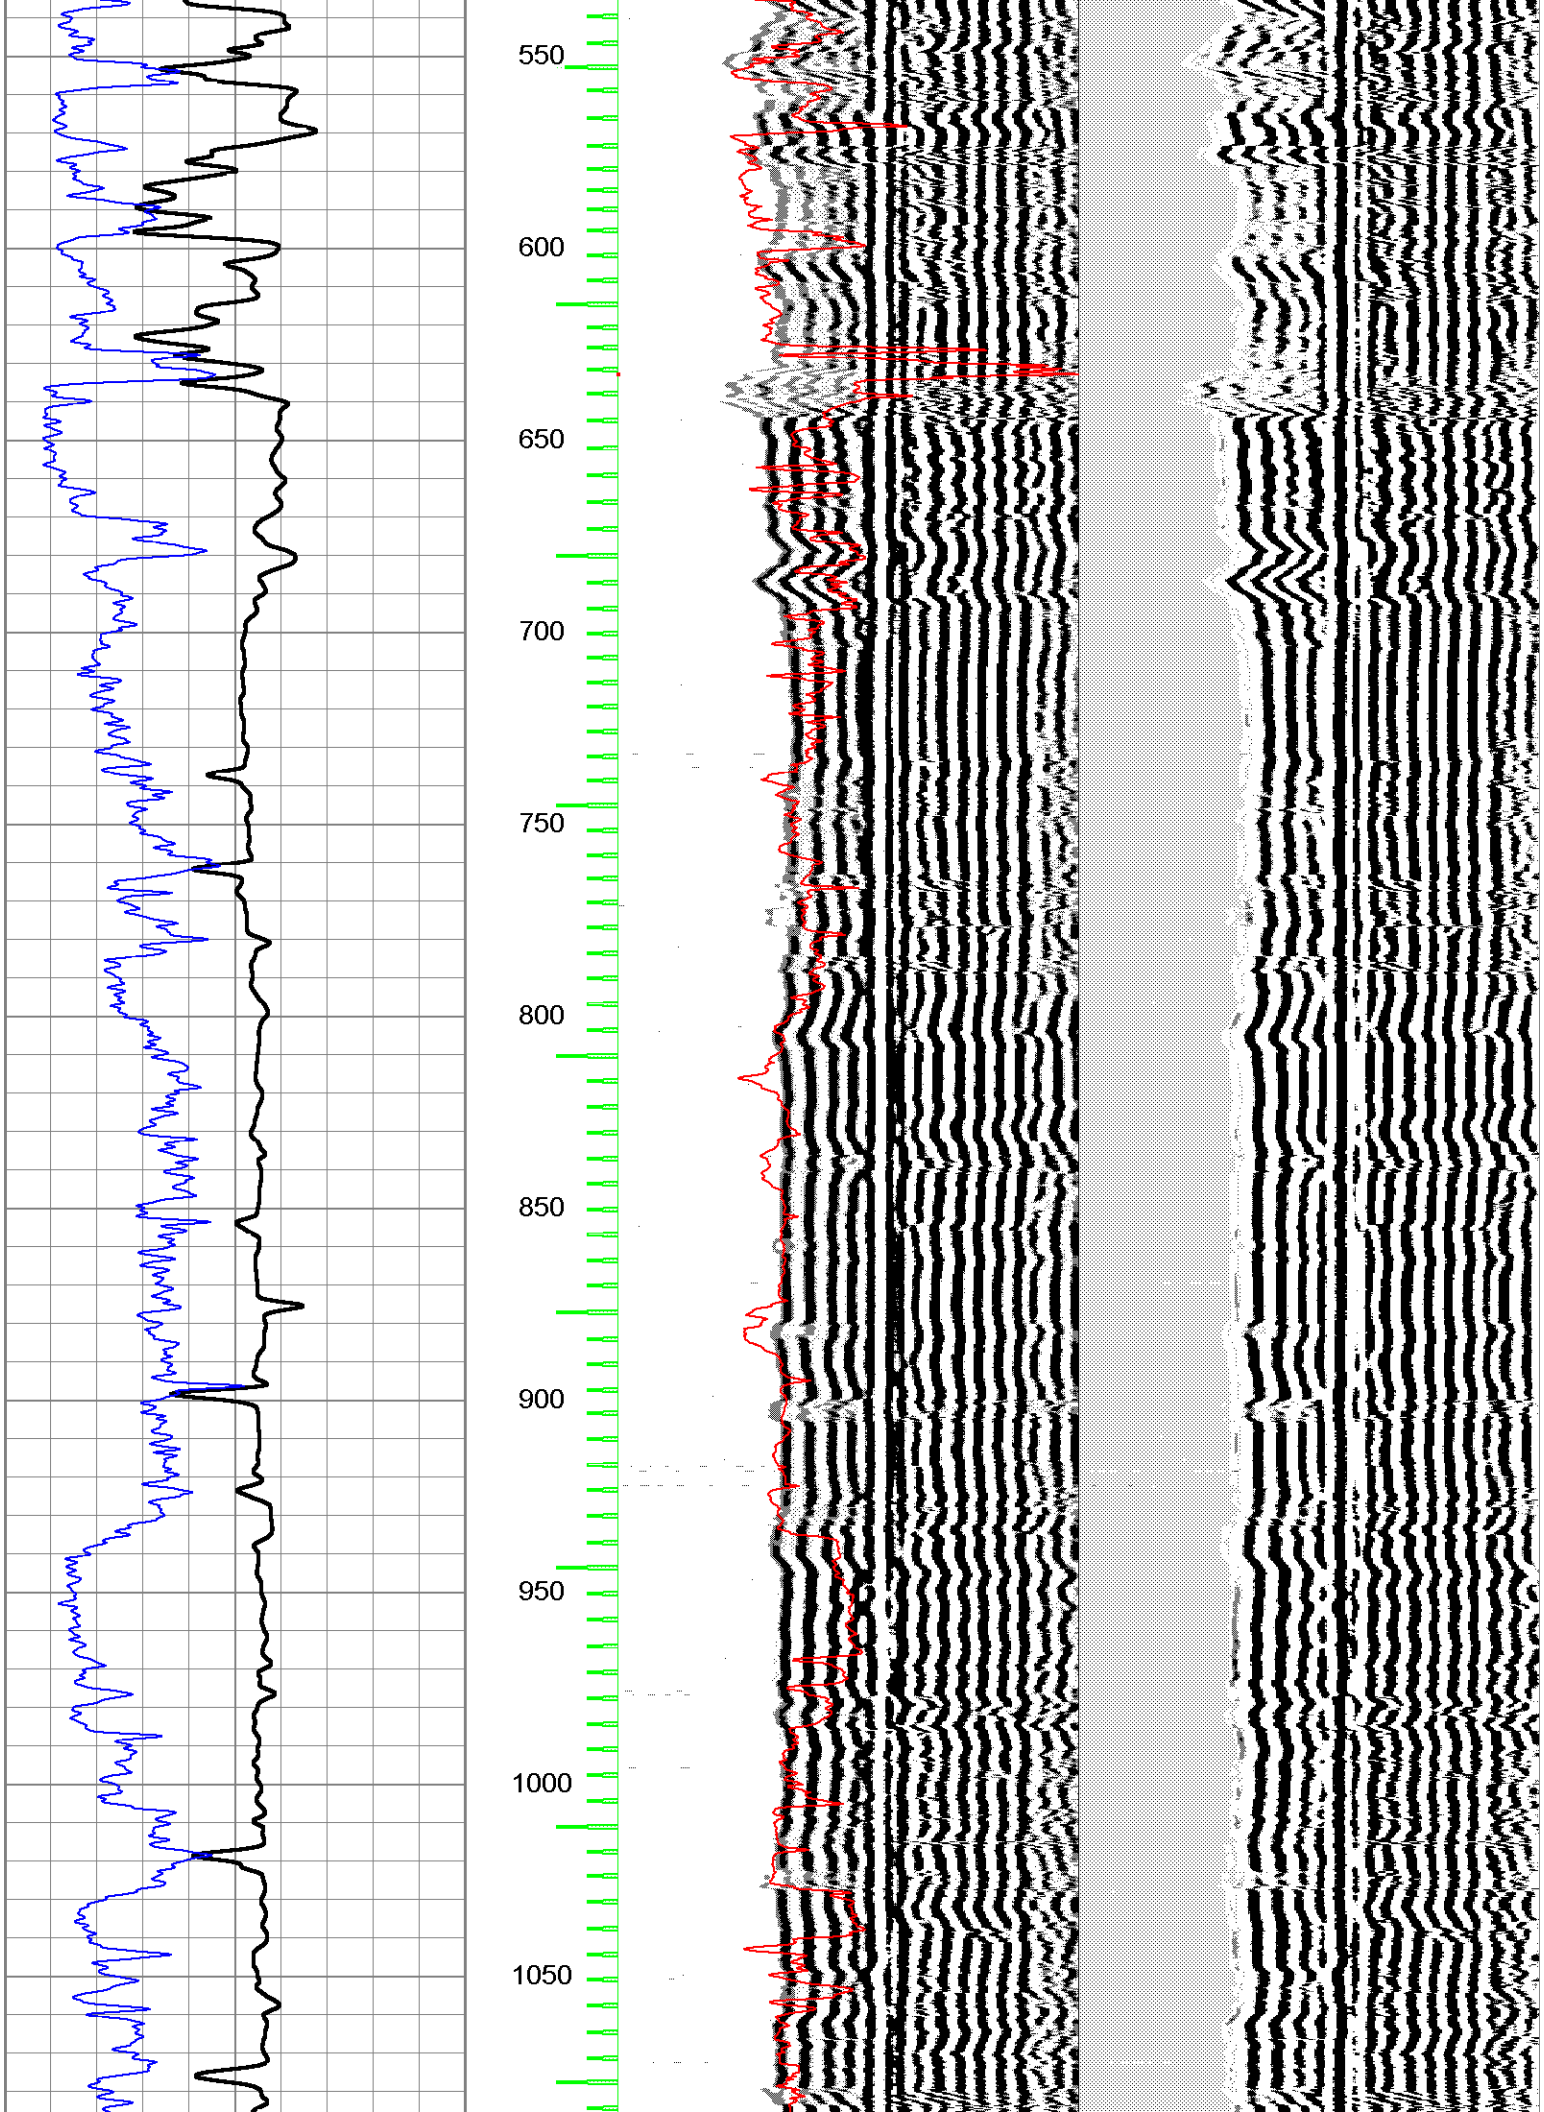
550
600
650
700
750
800
850
900
950
1000
1050

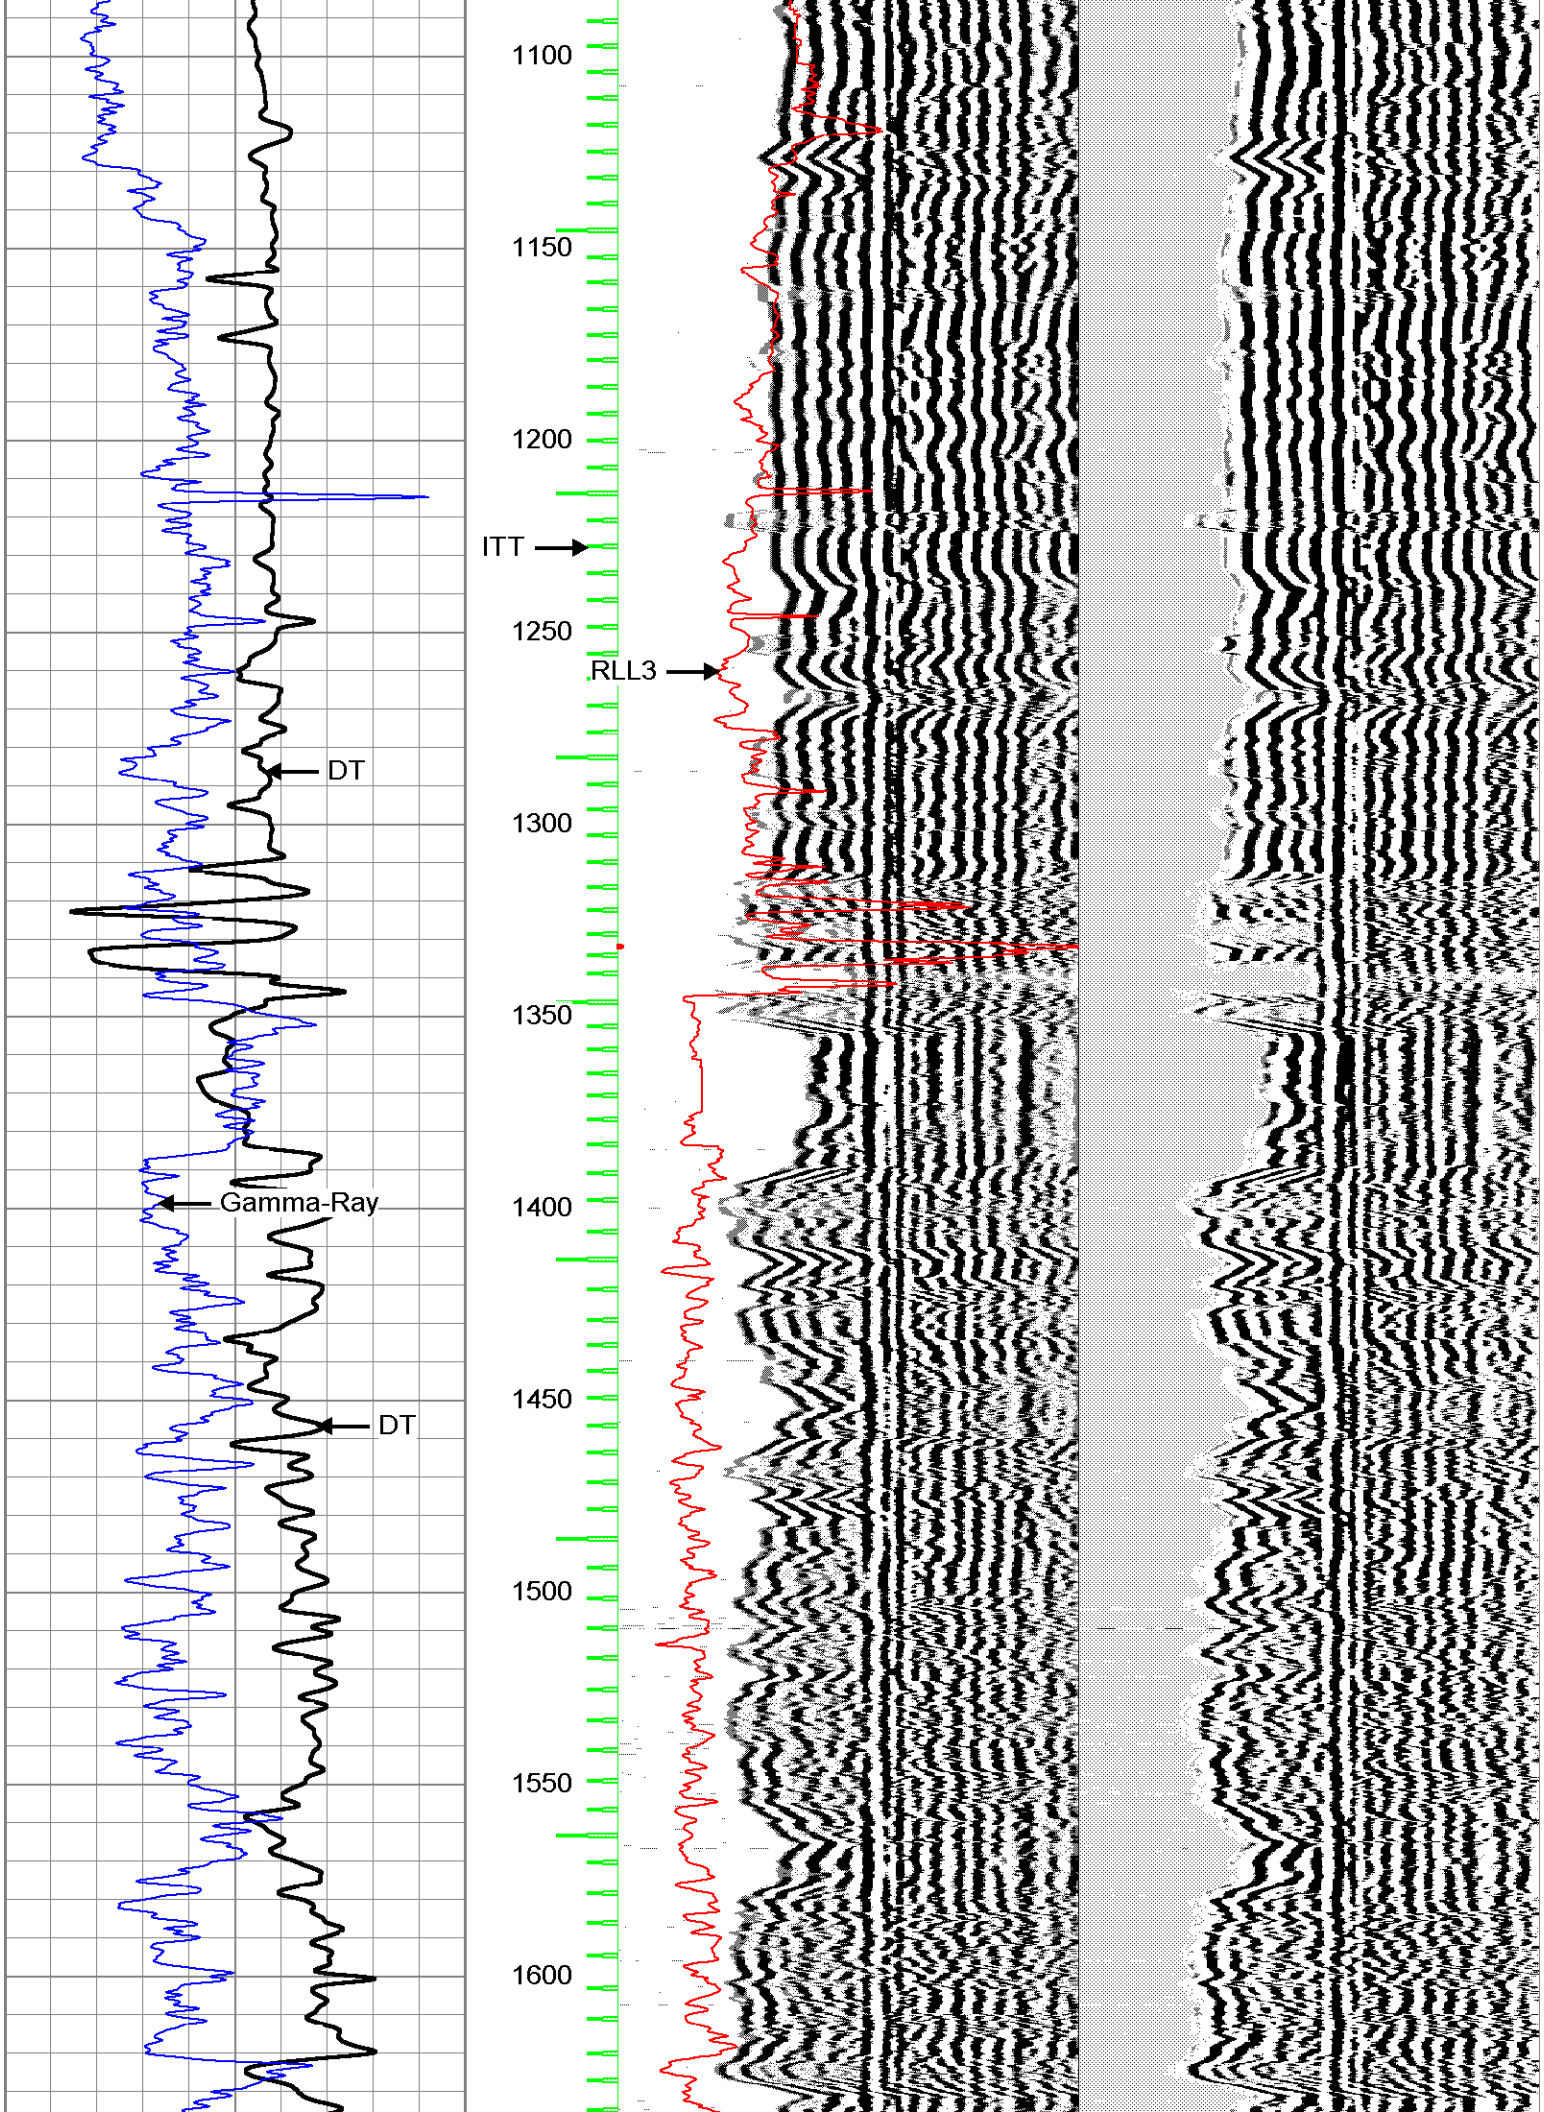
DT
Gamma-Ray
DT
1100
1150
1200
ITT
1250
RLL3
1300
1350
1400
1450
1500
1550
1600

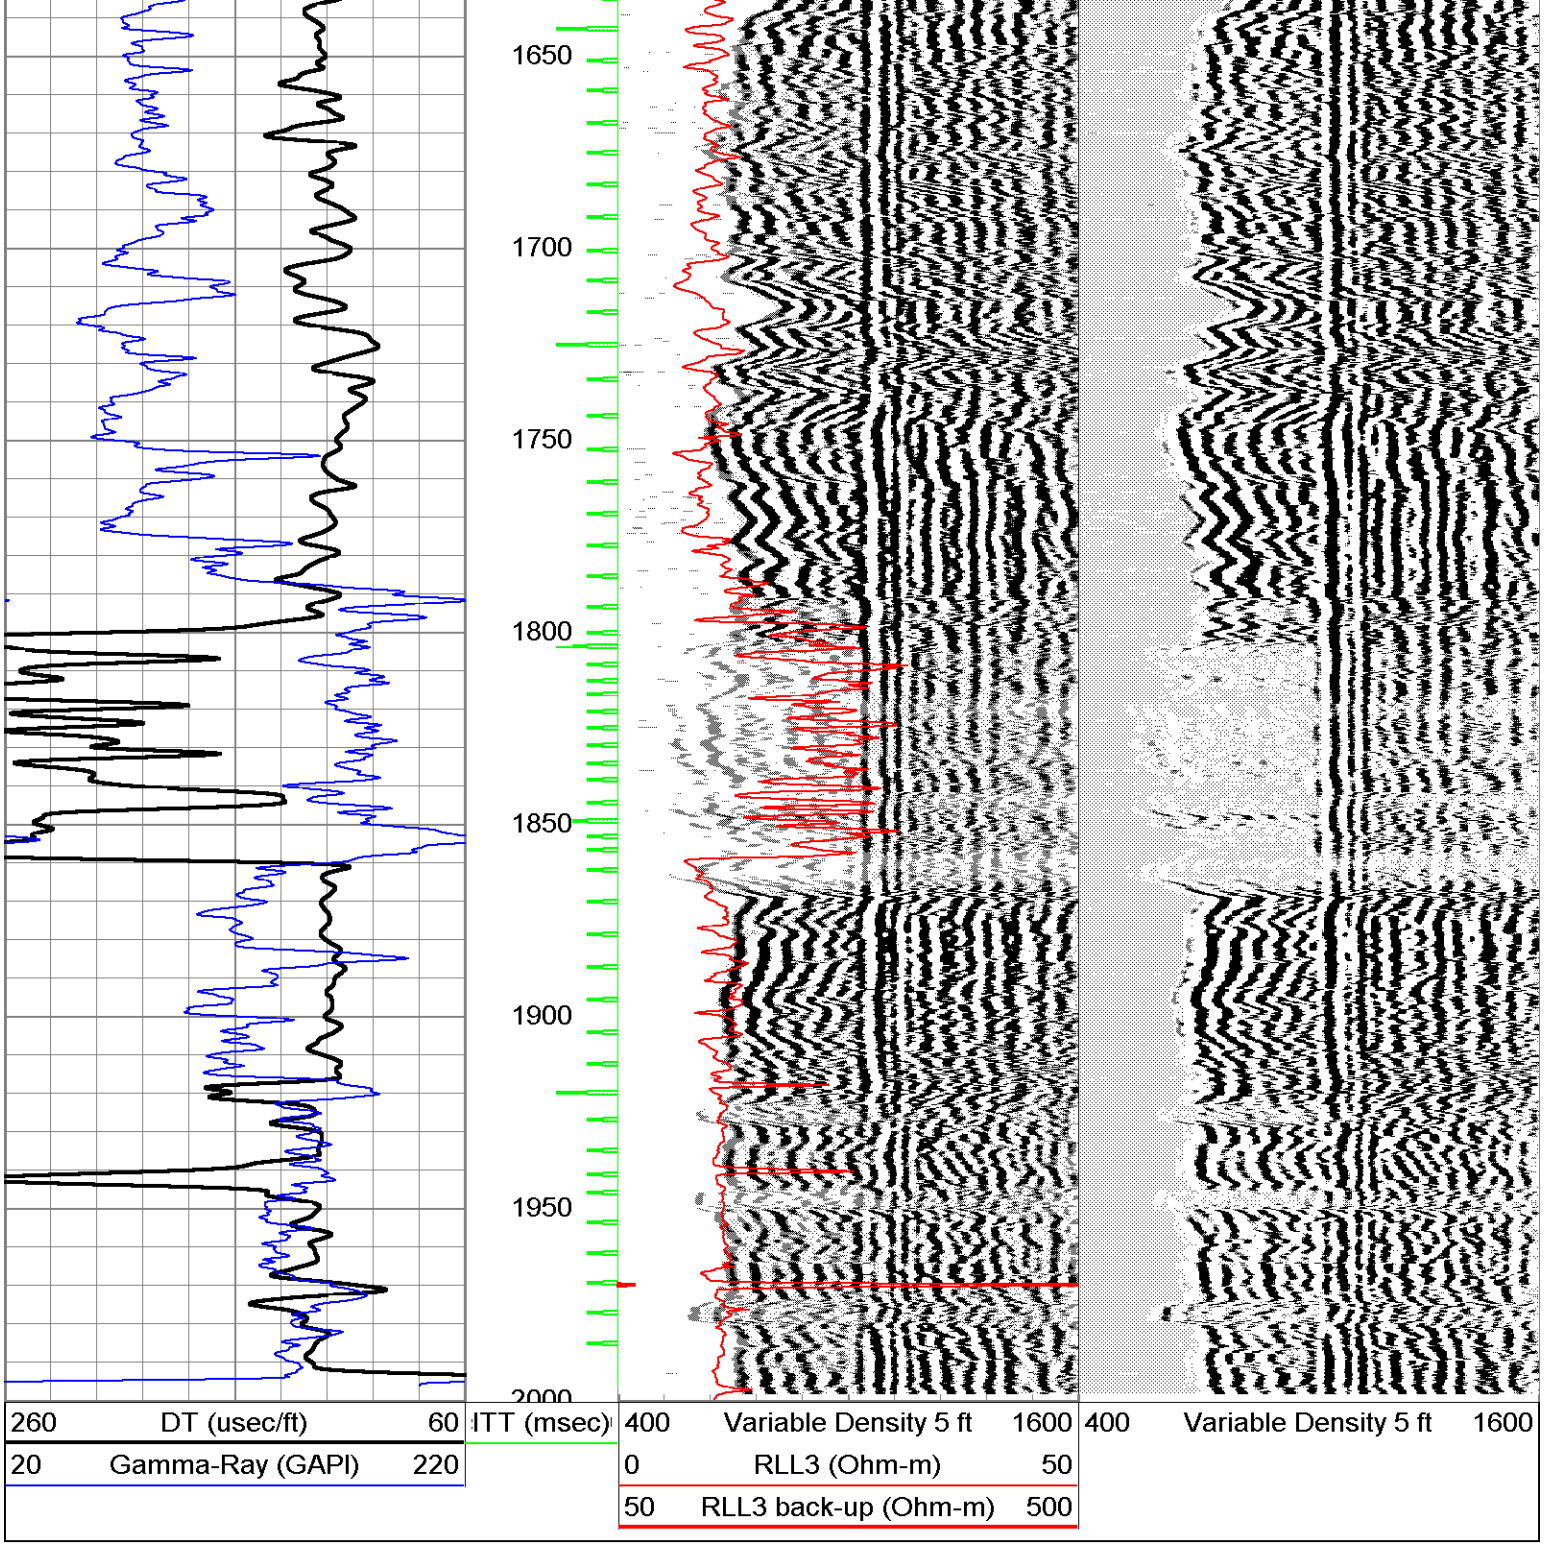
1650
1700
1750
1800
1850
1900
1950
2000
260 DT (usec/ft) 60
20 Gamma-Ray (GAPI) 220
ITT (msec)
400 Variable Density 5 ft 1600
0 RLL3 (Ohm-m) 50
50 RLL3 back-up (Ohm-m) 500
400 Variable Density 5 ft 1600