PACIFIC SURVEYS

SONIC VELOCITY VARIABLE DENSITY GAMMA RAY

Job No. 12772

File No.

Company U.S.G.S.

Well TMPP

Field TEMECULA

County RIVERSIDE State CA

Location:

CANTERFIELD RD.

Sec. Twp. Rge.

Other Services:

E-LOG
CALIPER
GR/LL3

Permanent Datum	G.L.	Elevation	Elevation
Log Measured From	G.L.	0' above perm. datum	K.B.
Drilling Measured From	G.L.		D.F.
			G.L.

Date	9-15-06		
Run Number	ONE		
Depth Driller	1485'		
Depth Logger	1488'		
Bottom Logged Interval	1486'		
Top Log Interval	30'		
Casing Driller	N/A		
Casing Logger	N/A		
Bit Size	6" 0-1300'	5 3/4" 1300-T.D.	
Type Fluid in Hole	BENTONITE		
Density / Viscosity	N/A		
pH / Fluid Loss	N/A		
Source of Sample	PIT		
Rm @ Meas. Temp	3.19 @ 77F		
Rmf @ Meas. Temp	3.7 @ 77F		
Rmc @ Meas. Temp	N/A		
Source of Rmf / Rmc	MEAS		
Rm @ BHT	N/A		
Time Circulation Stopped	N/A		
Time Logger on Bottom	2:00 PM		
Max. Recorded Temperature	N/A		
Equipment Number	PS-2		
Location	L.A.		
Recorded By	LAPORTE		
Witnessed By	TONY		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

Database File: 12772.db
Dataset Pathname: USGS/Temec/run1/SNC
Presentation Format: SLT
Dataset Creation: Fri Sep 15 16:11:22 2006 by Log 6.0
Charted by: Depth in Feet scaled 1:240

250	DT (usec/ft)	50
40	Gamma Ray (GAPI)	100
0	Line Speed (ft/min)	100

ITT (msec)		
500	Variable Density 5 ft	1600
0	RLL3 (Ohm-m)	100

500	Variable Density 5ft	1600
500	Signature	1600

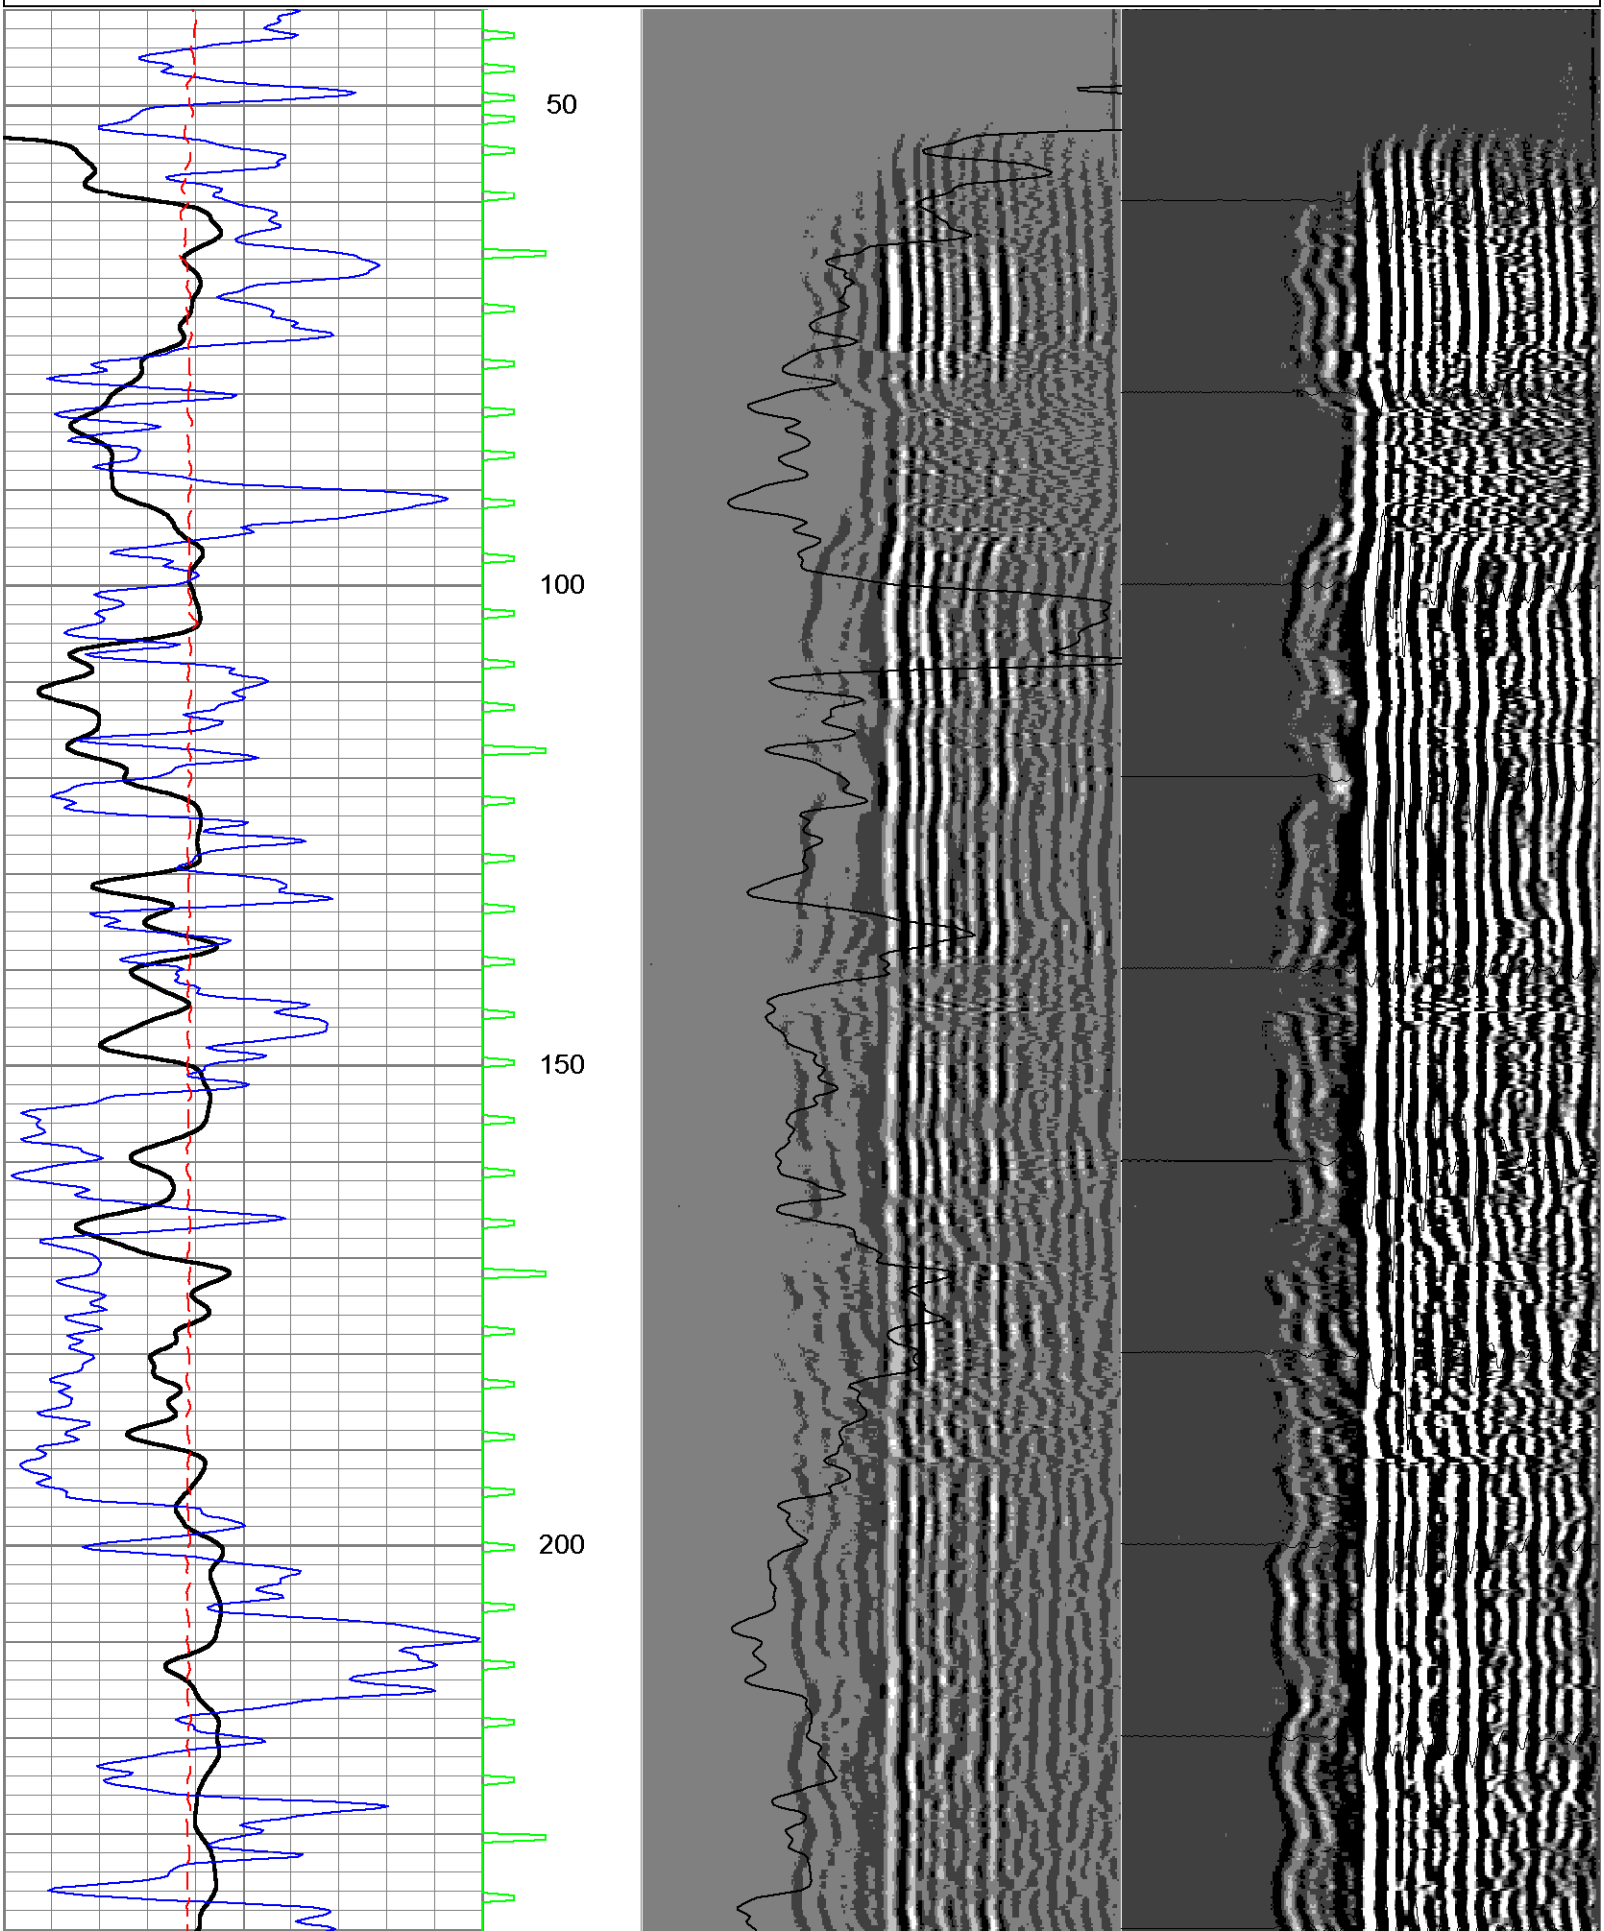

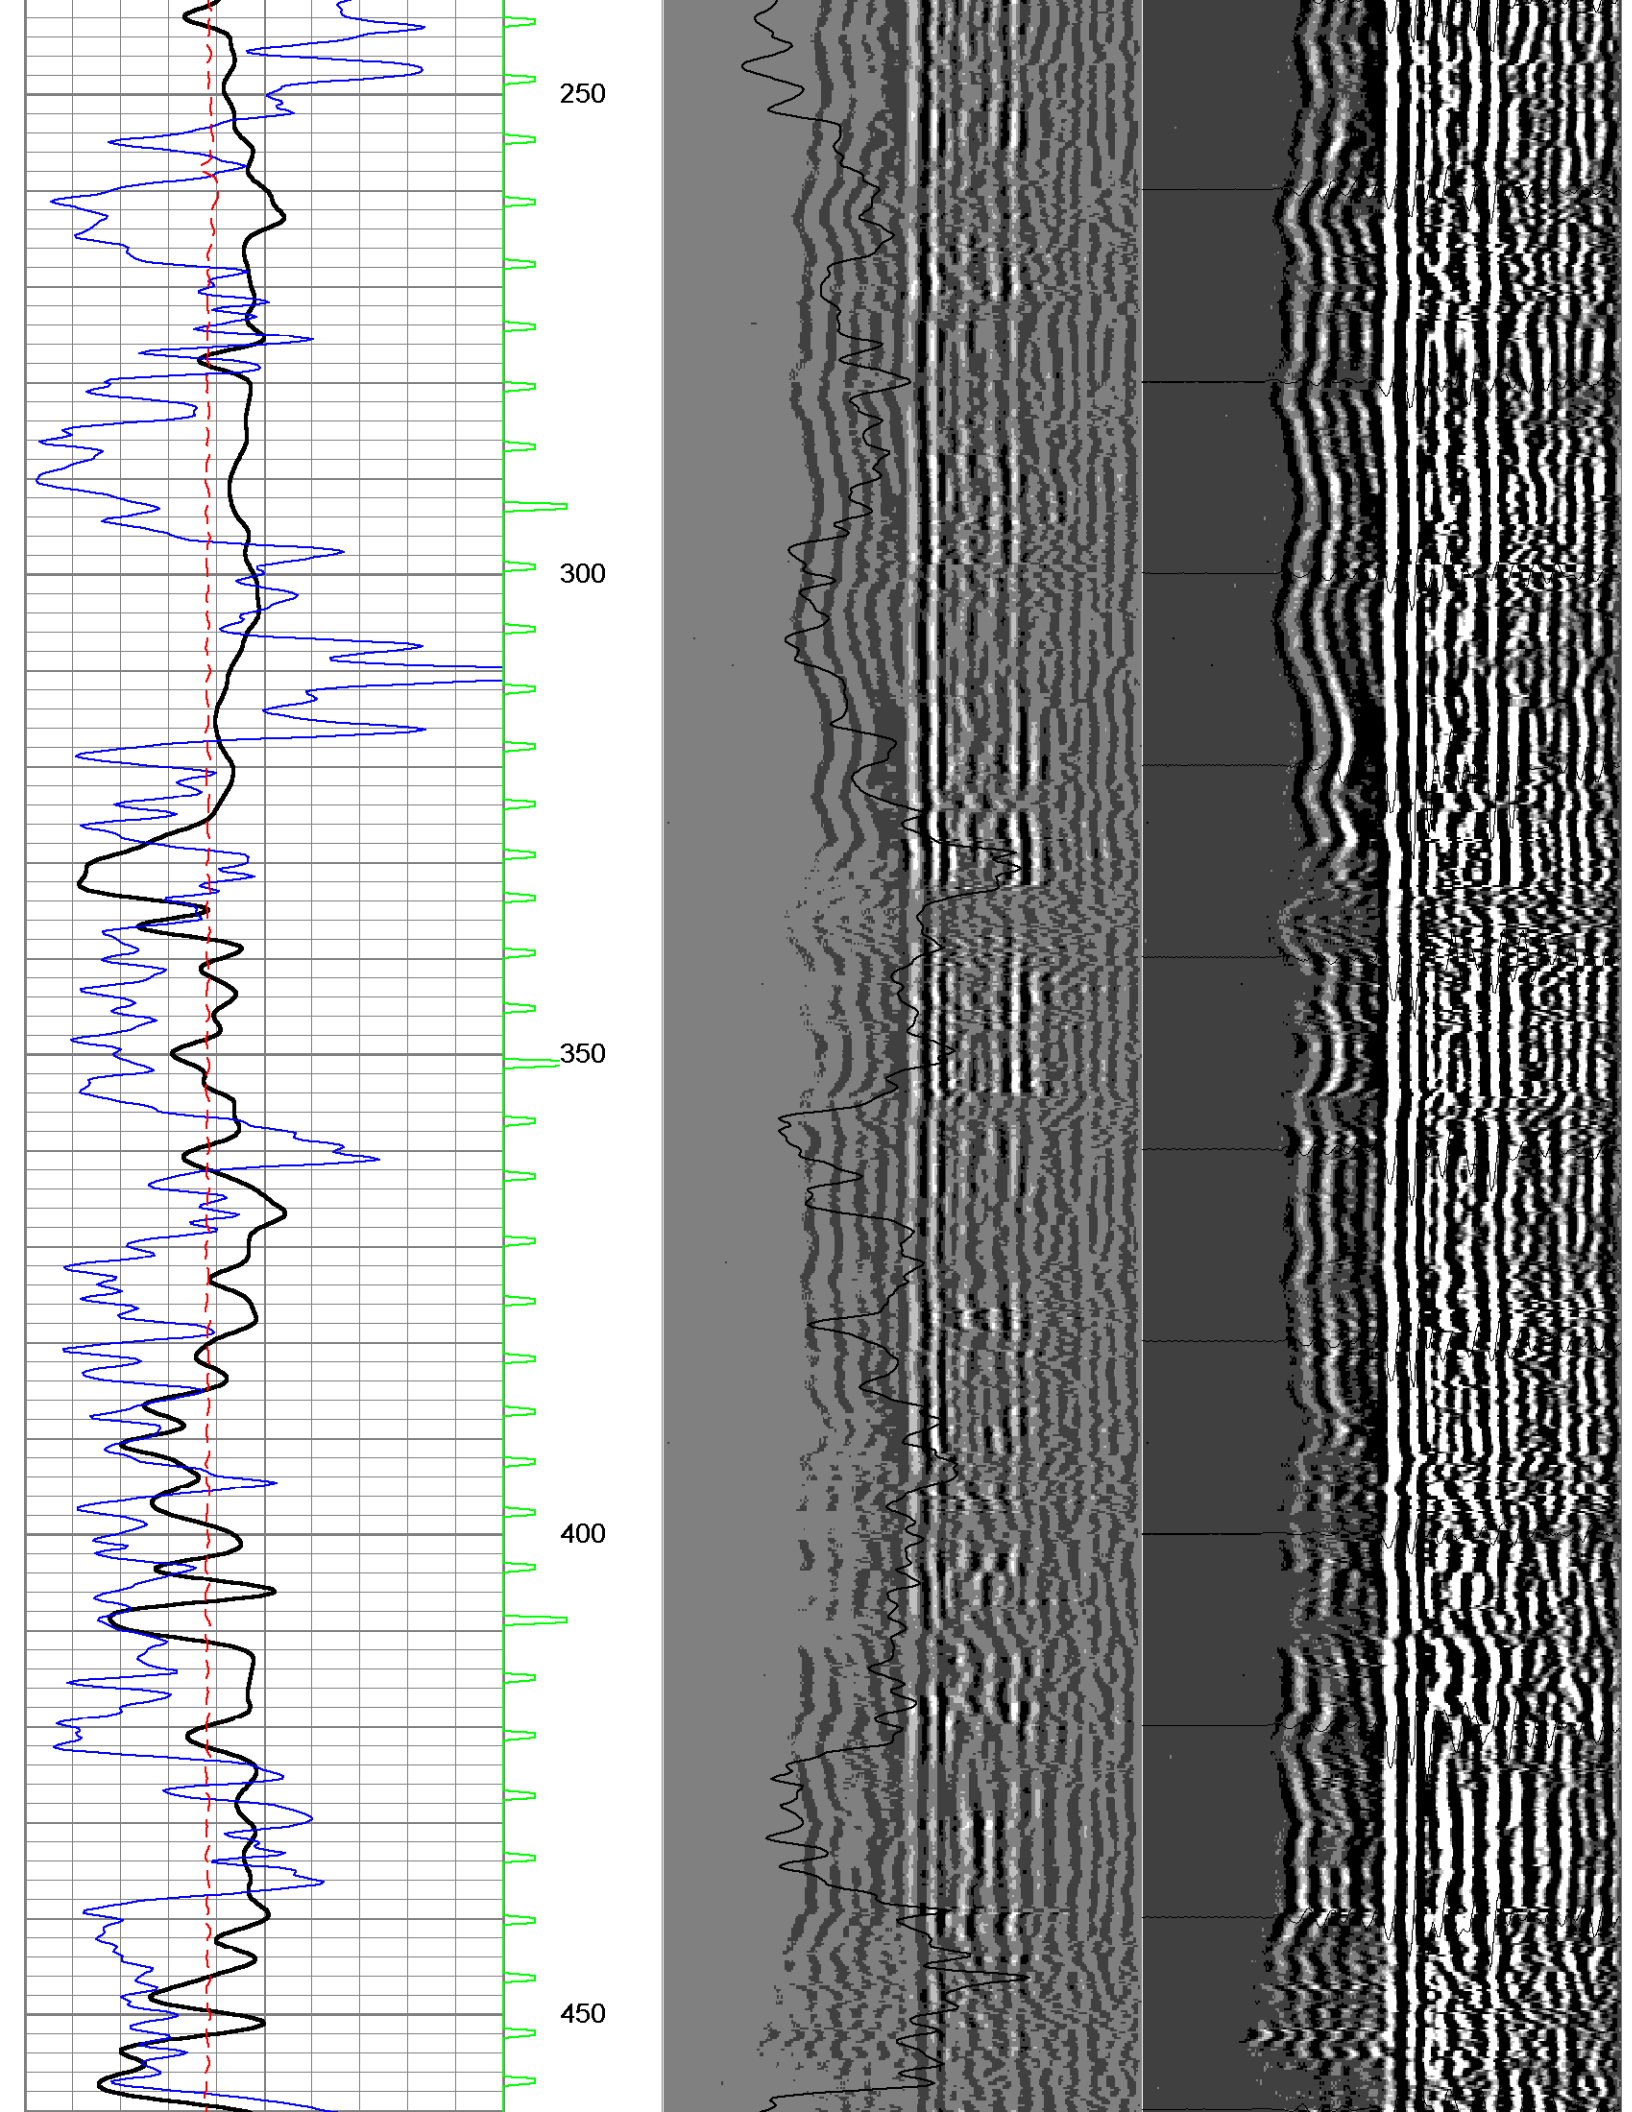
250
300
350
400
450

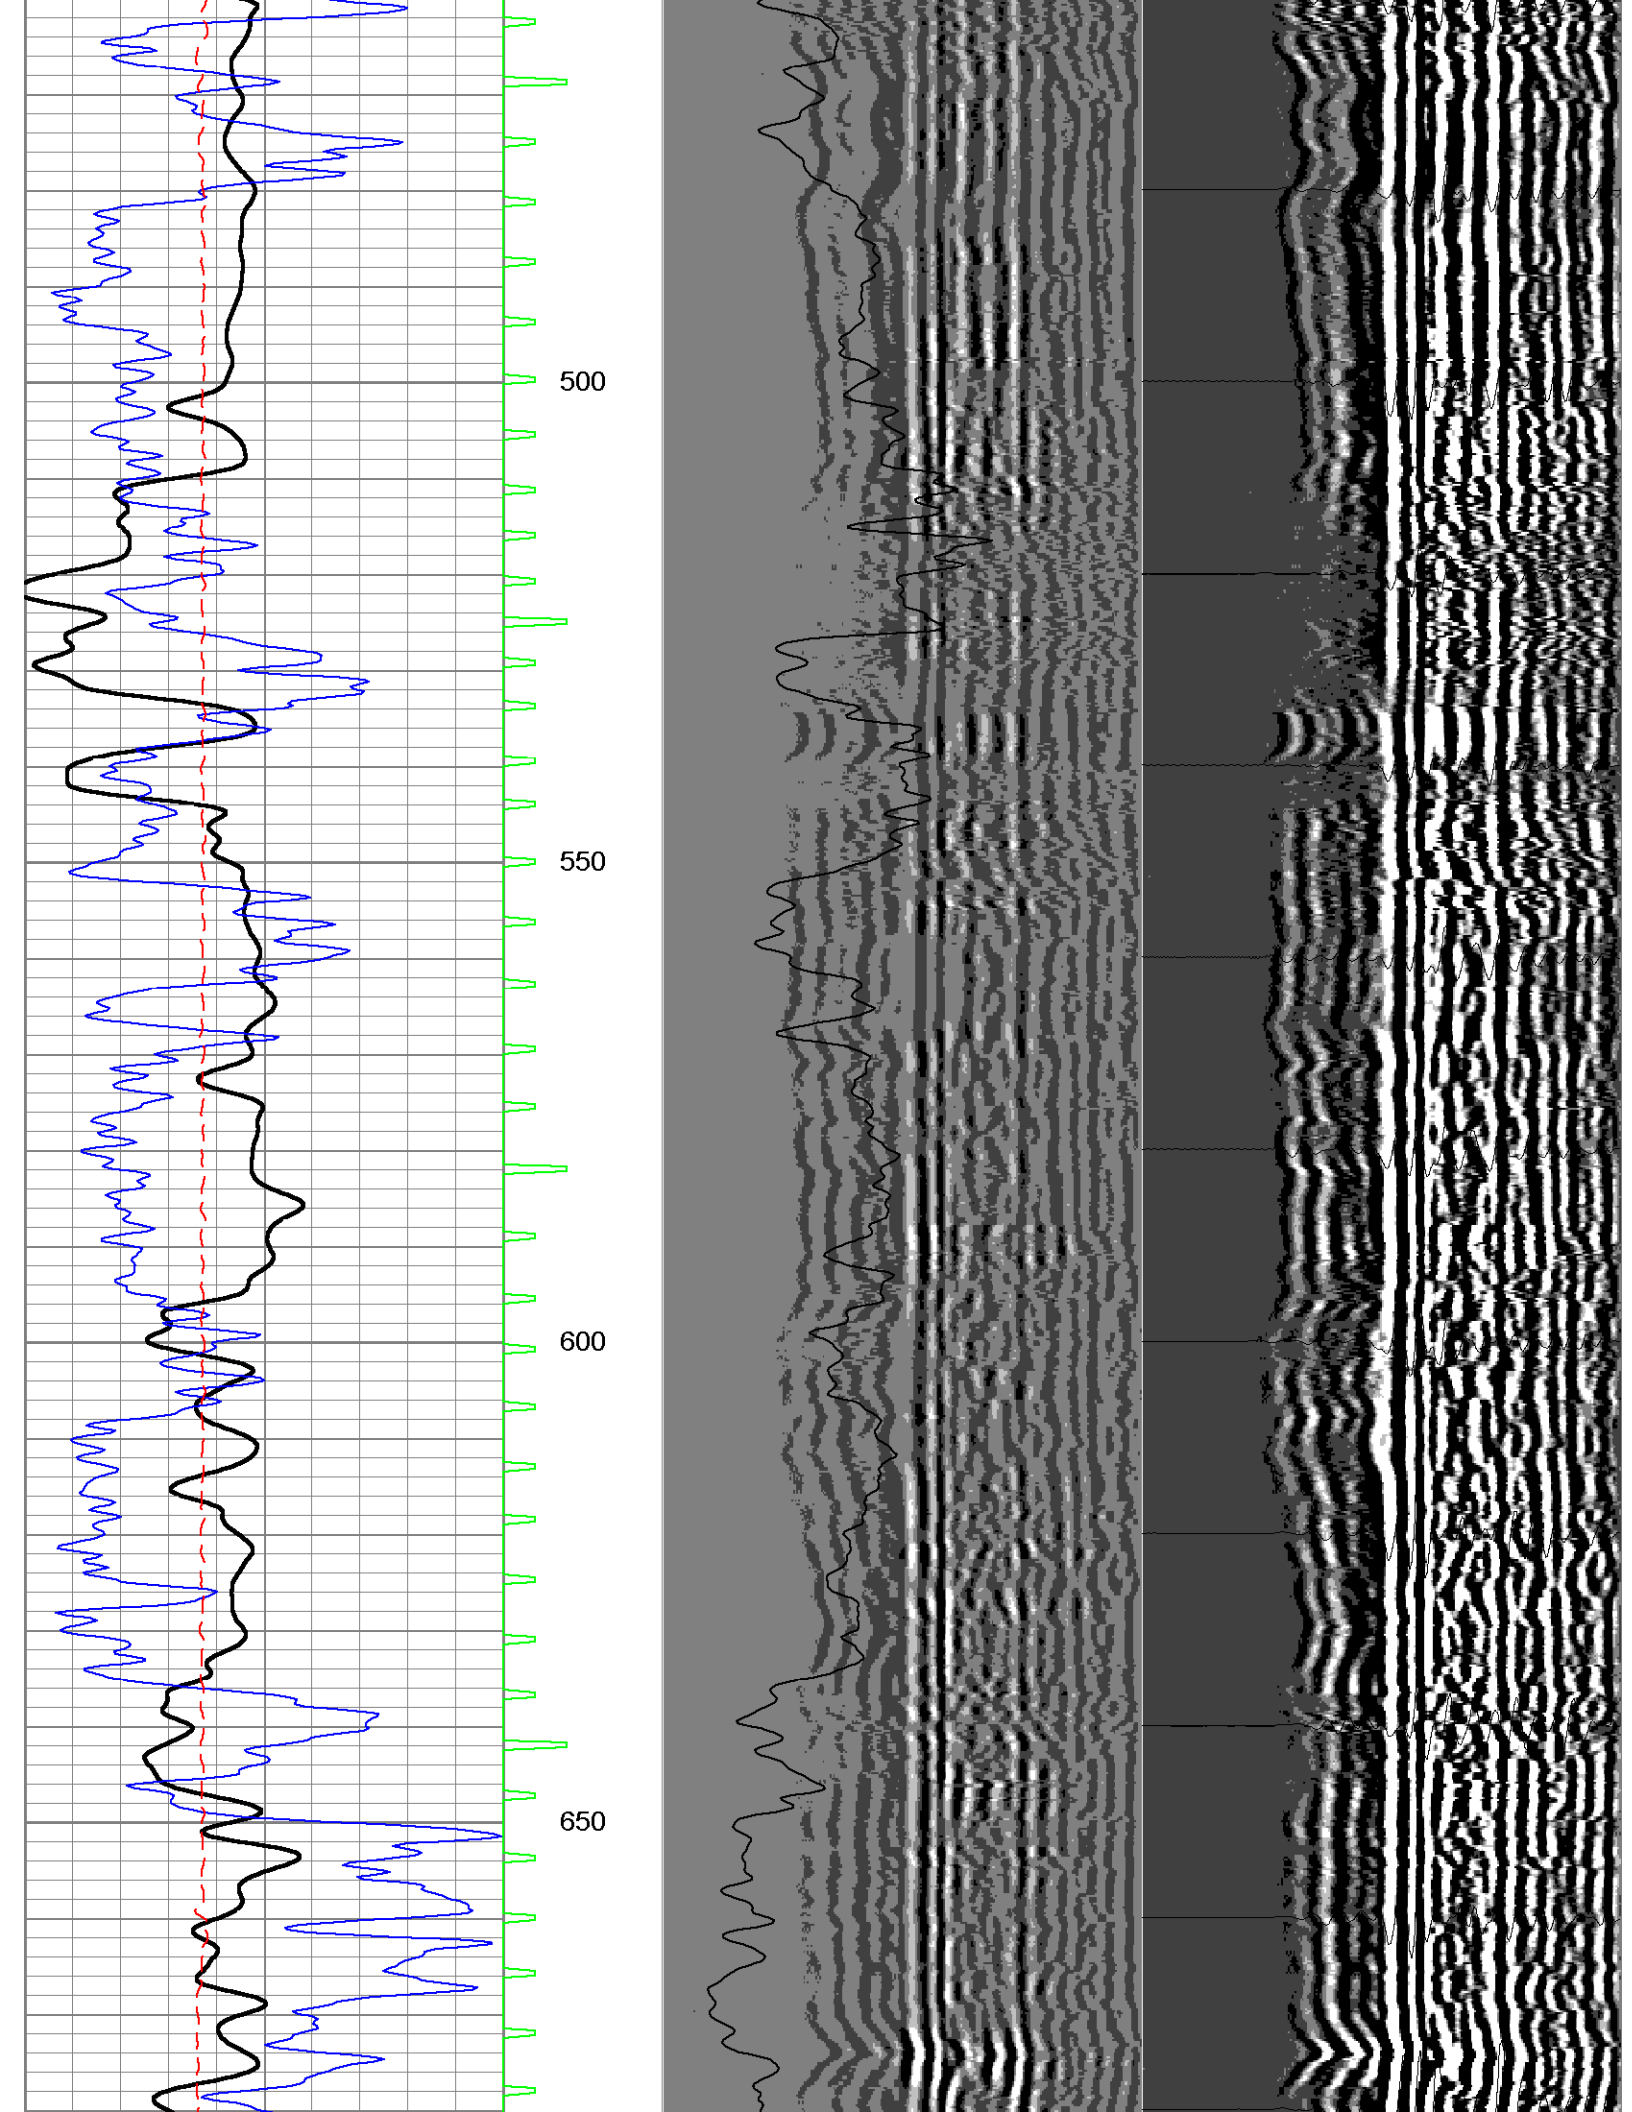
500
550
600
650

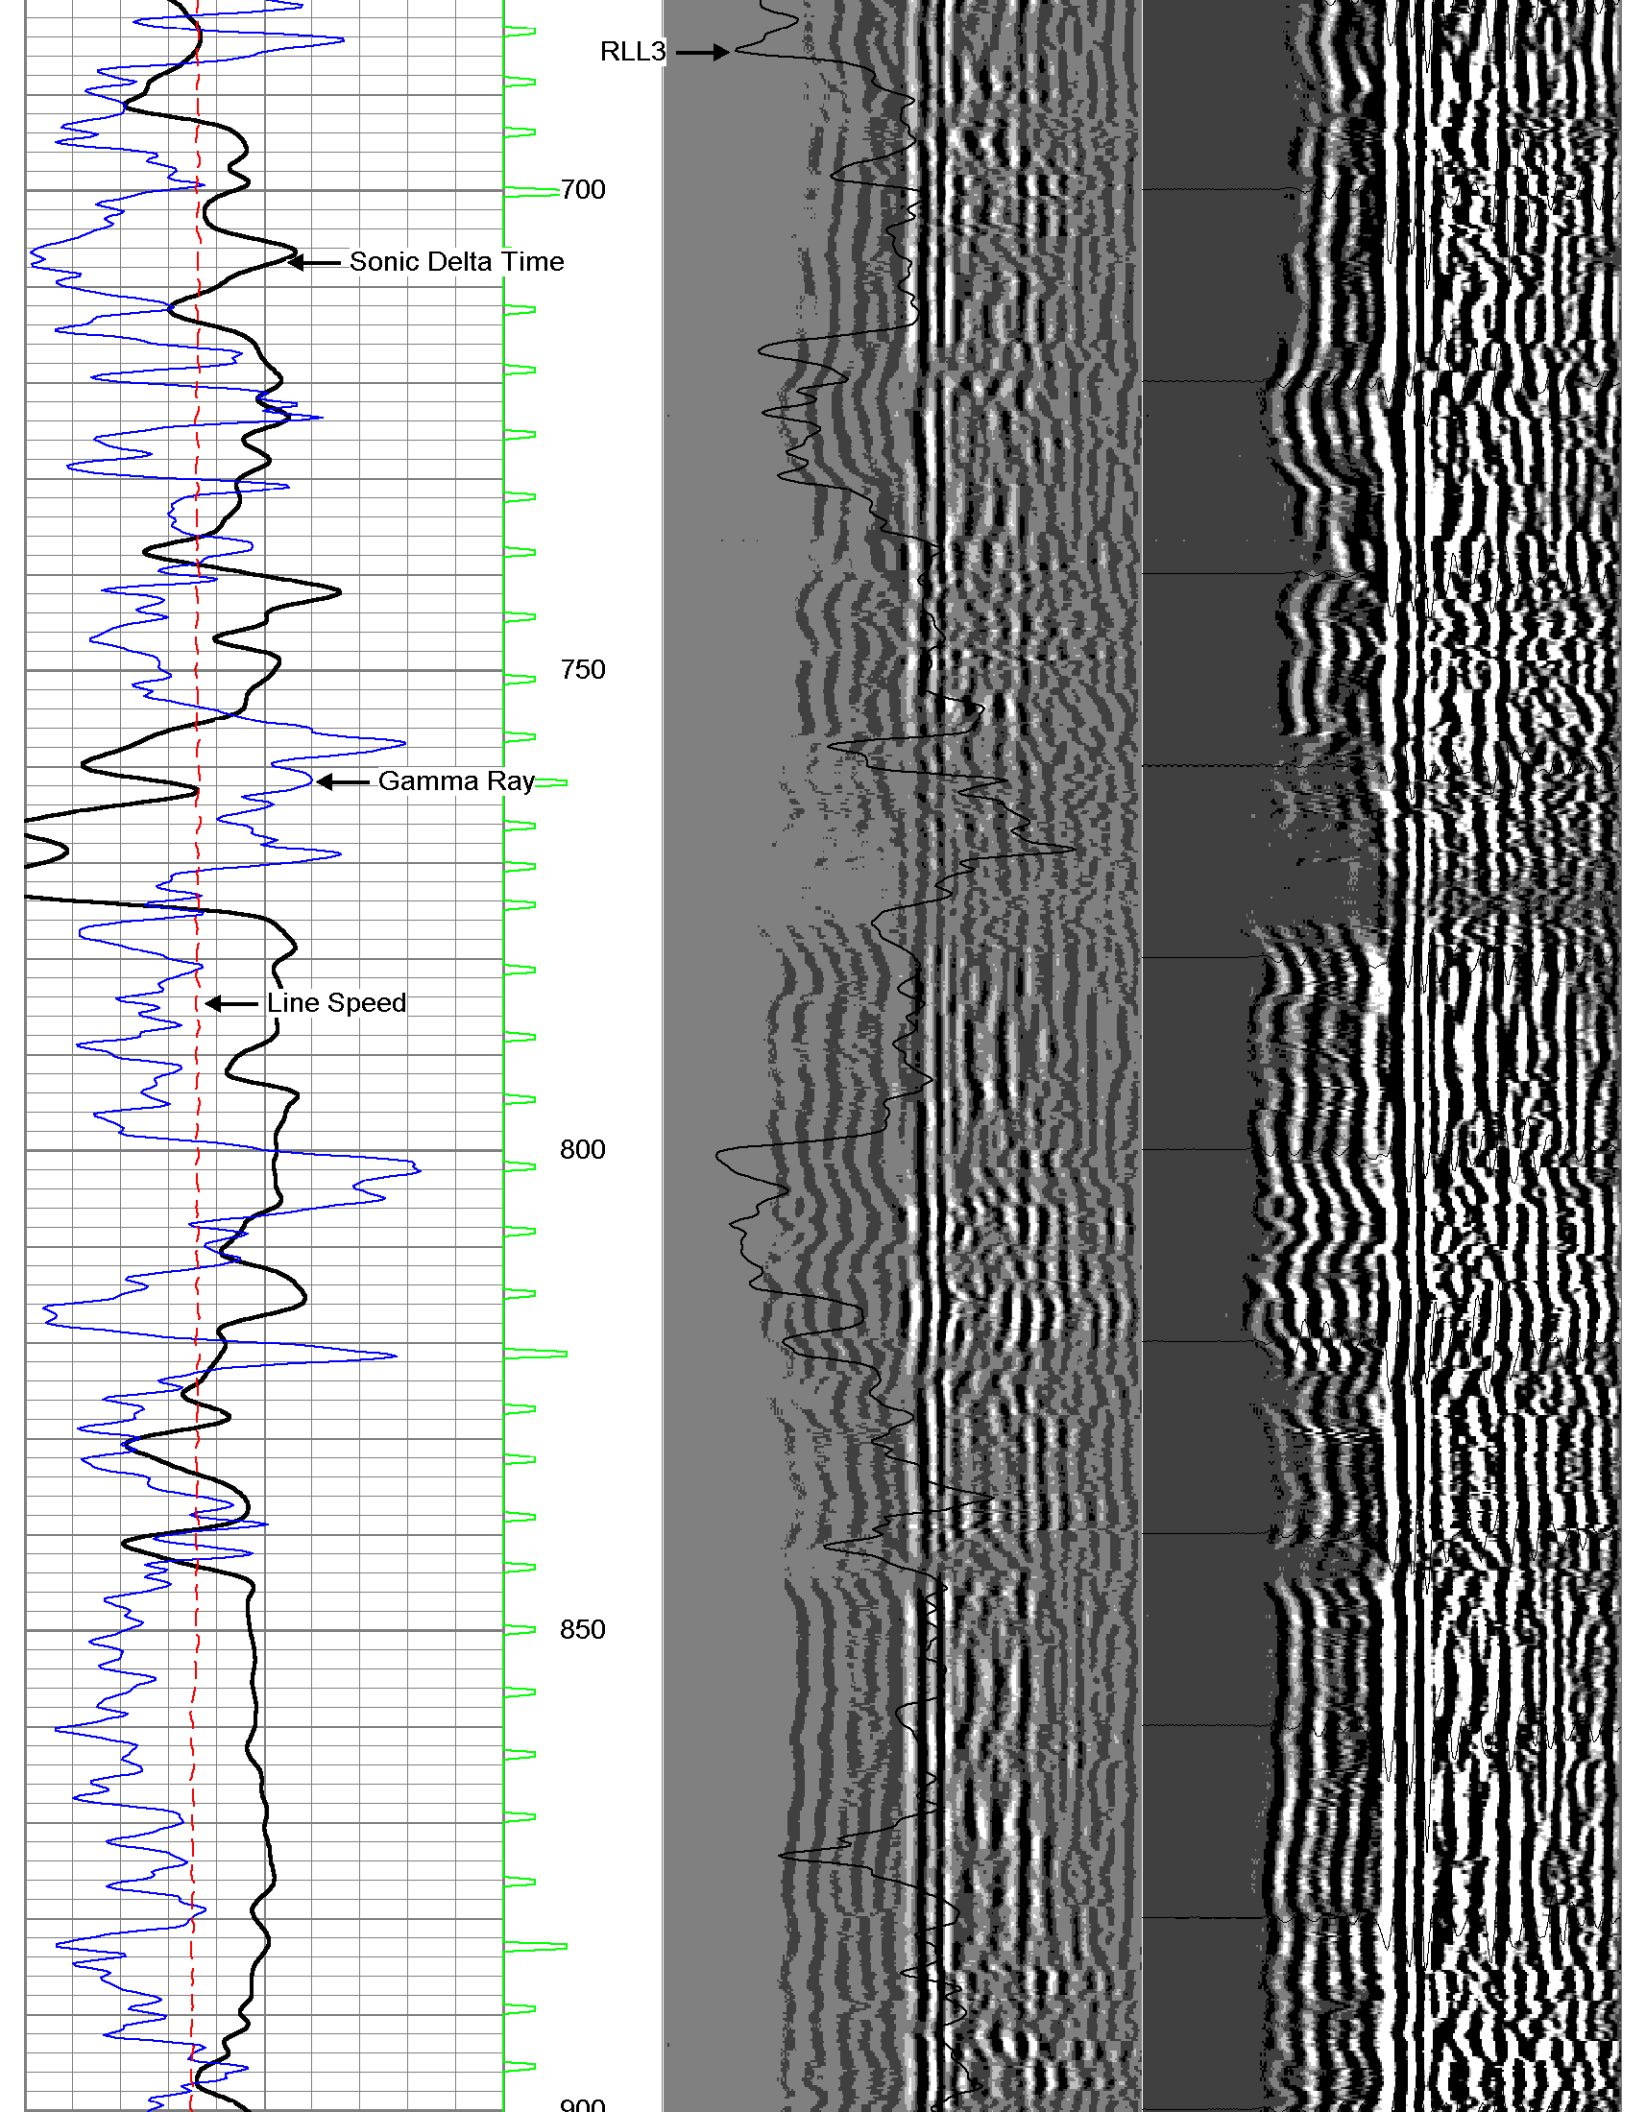
RLL3
700
Sonic Delta Time
750
Gamma Ray
Line Speed
800
850
900

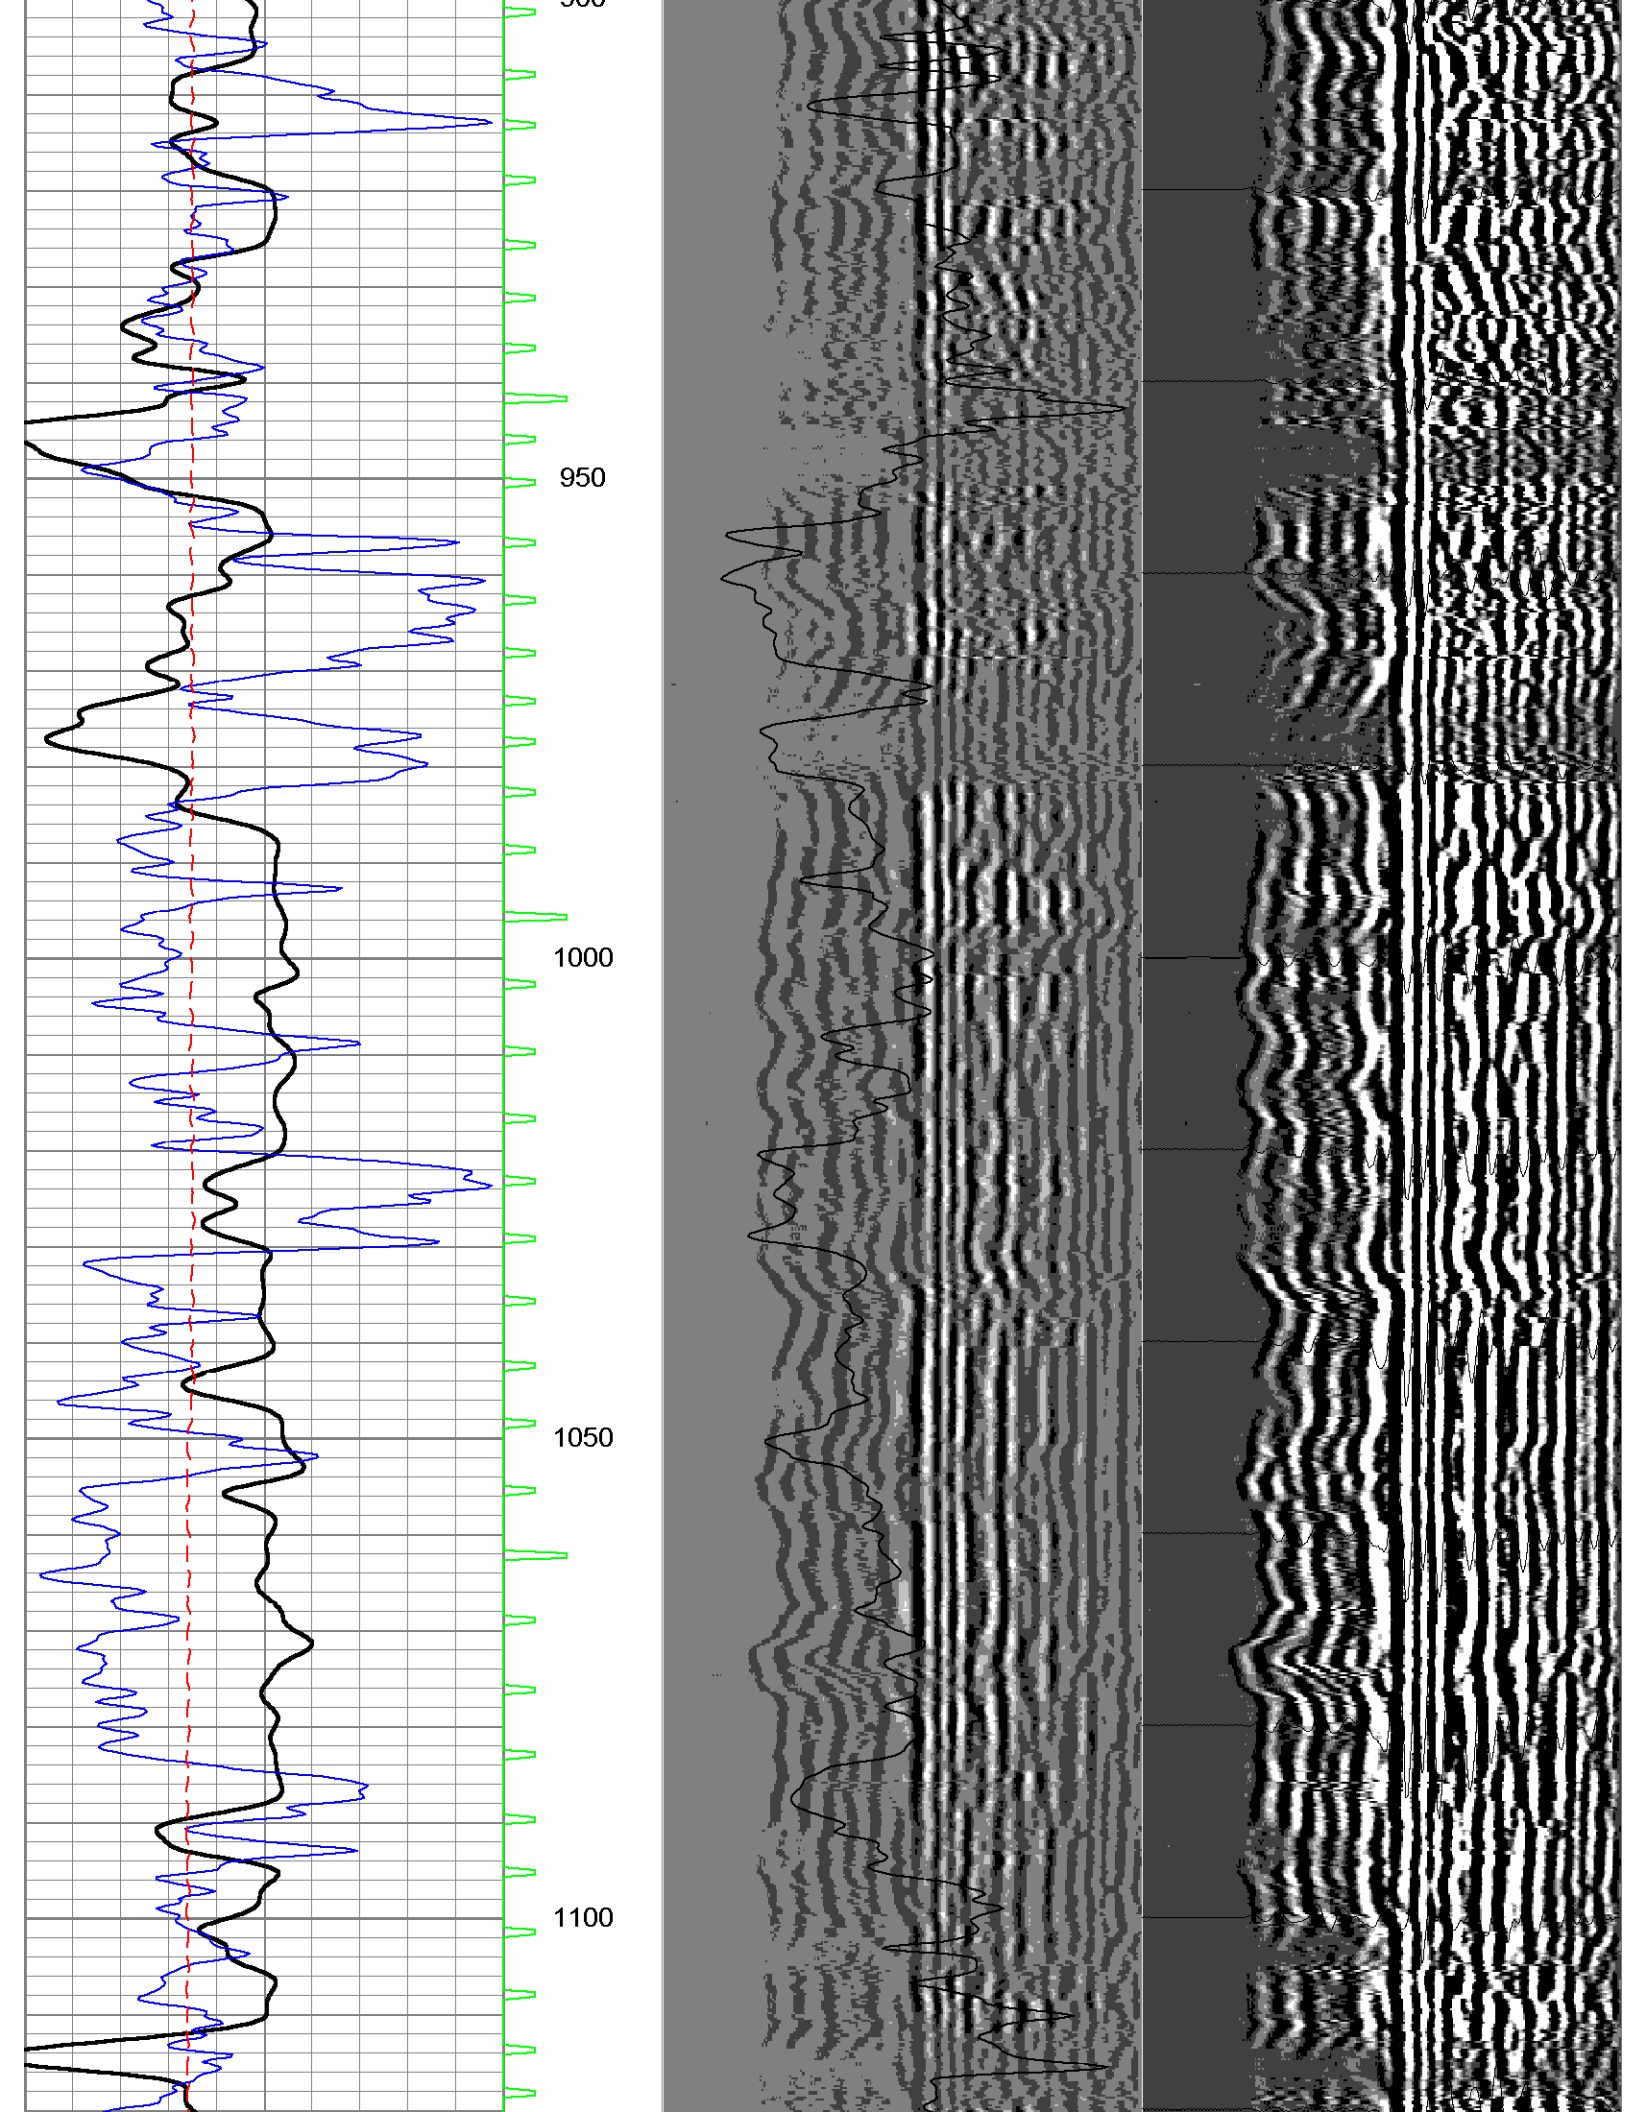
950
1000
1050
1100

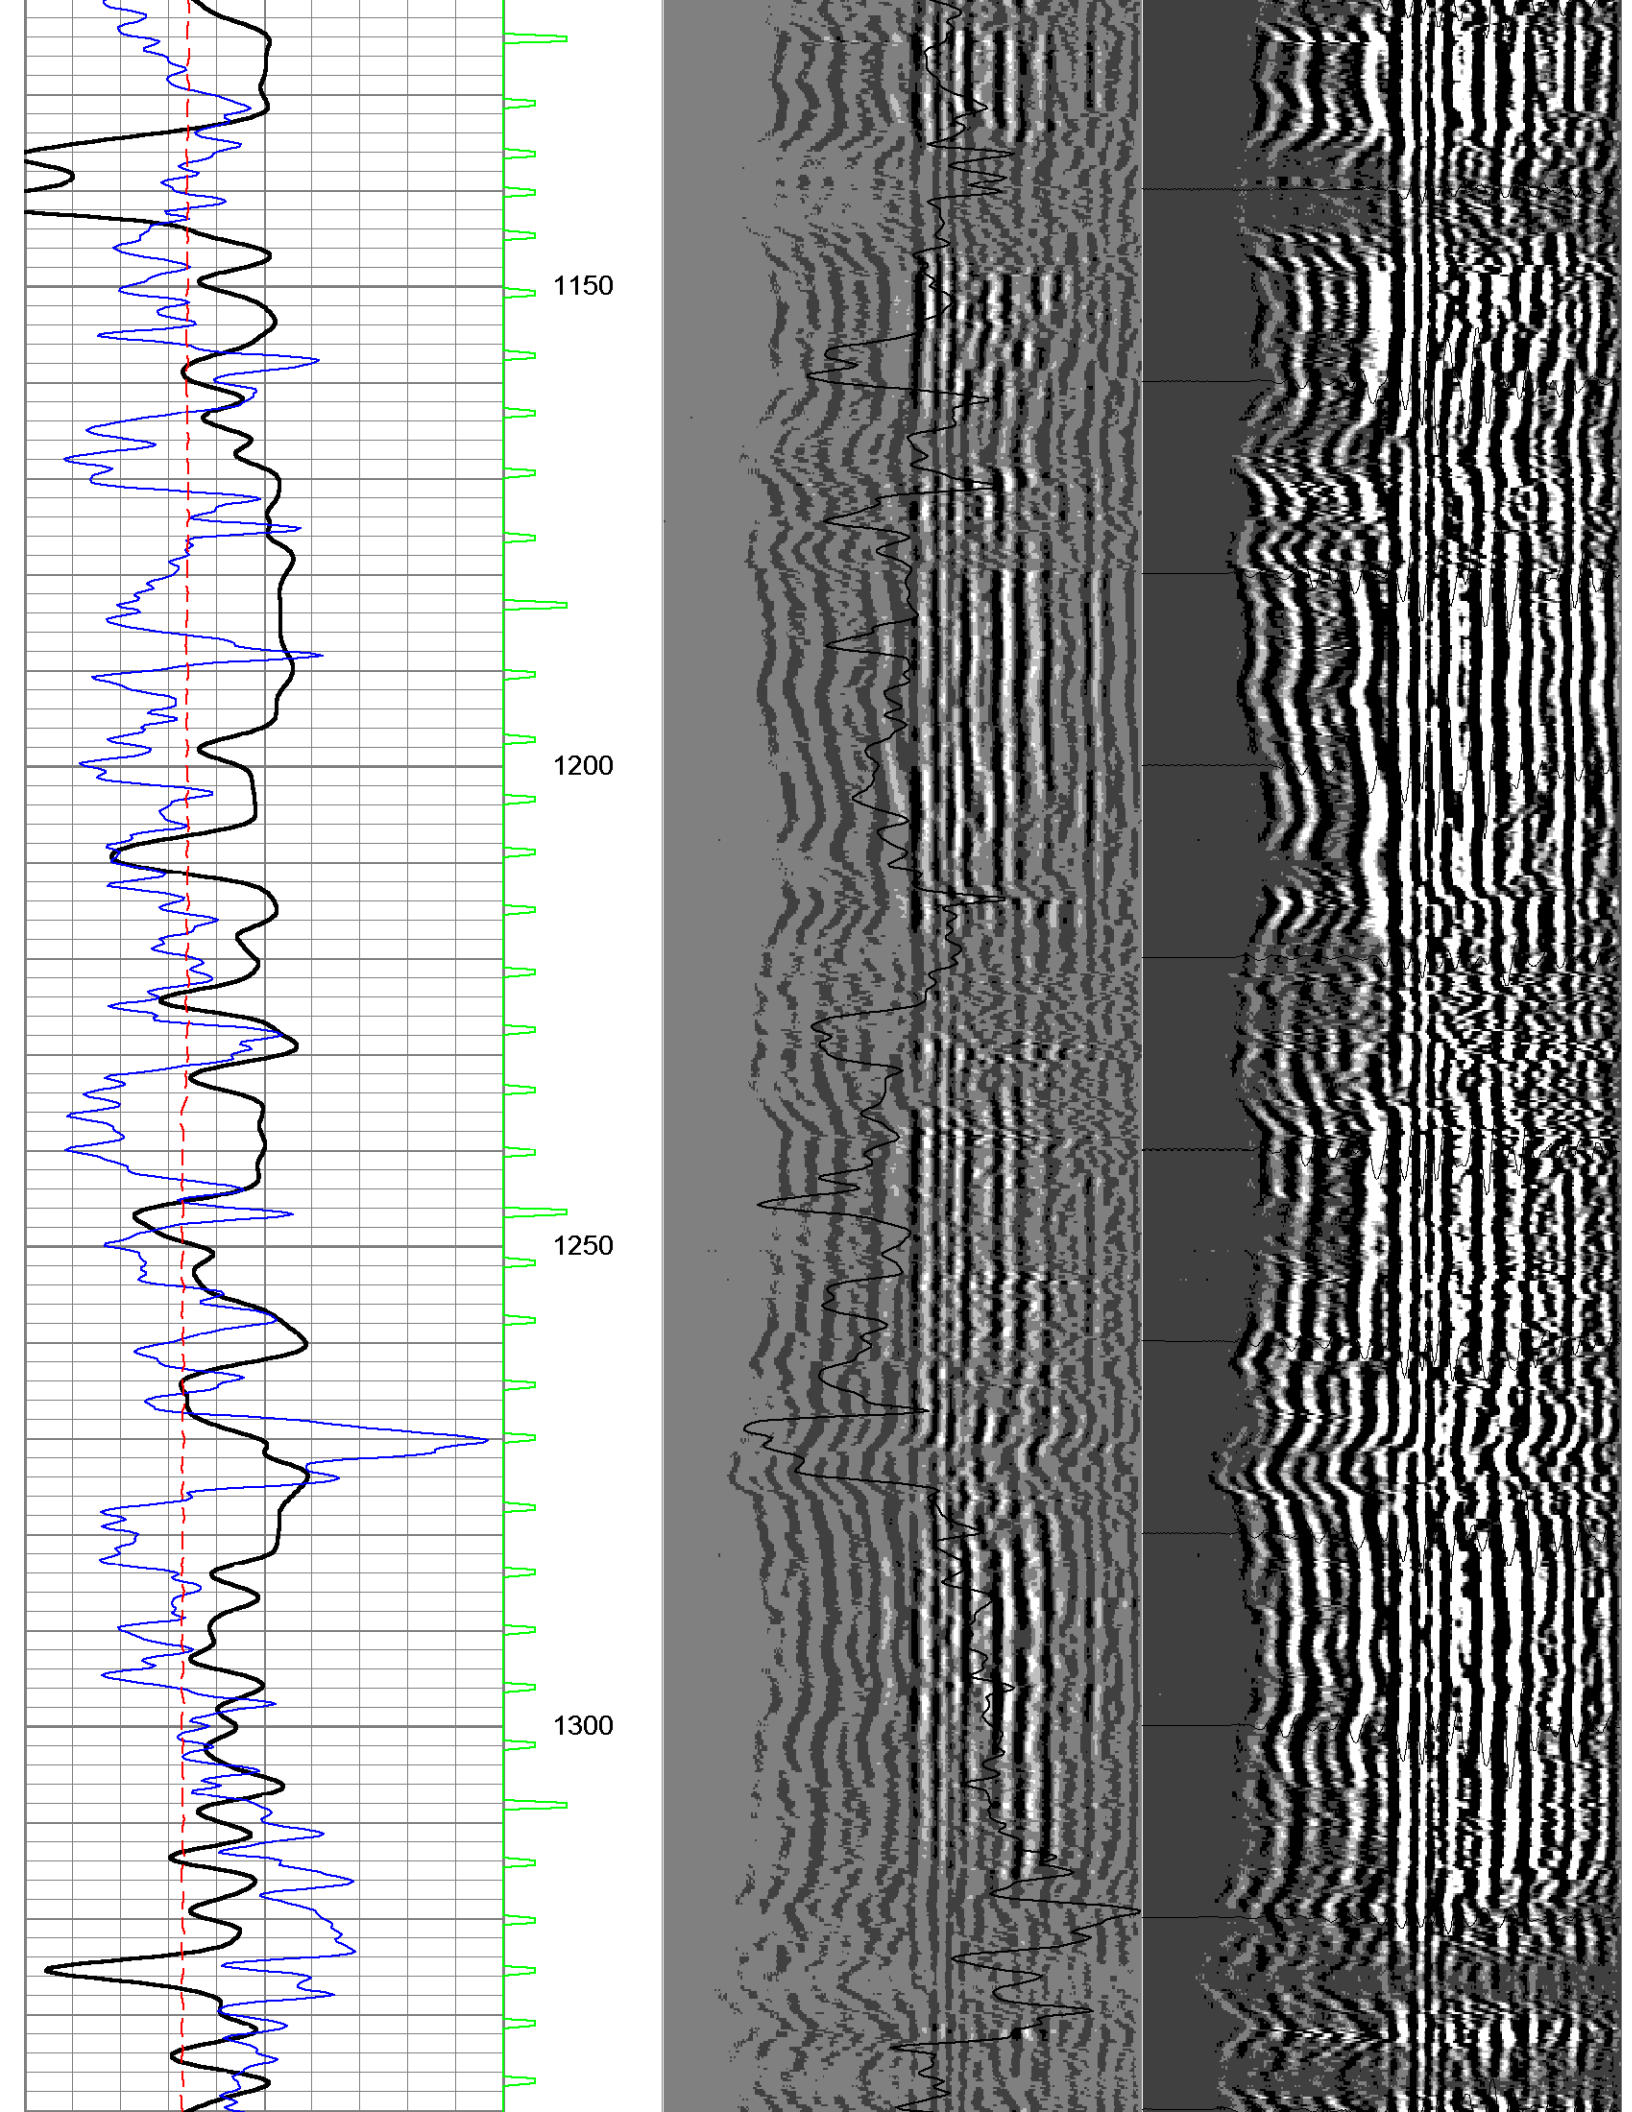
1150
1200
1250
1300

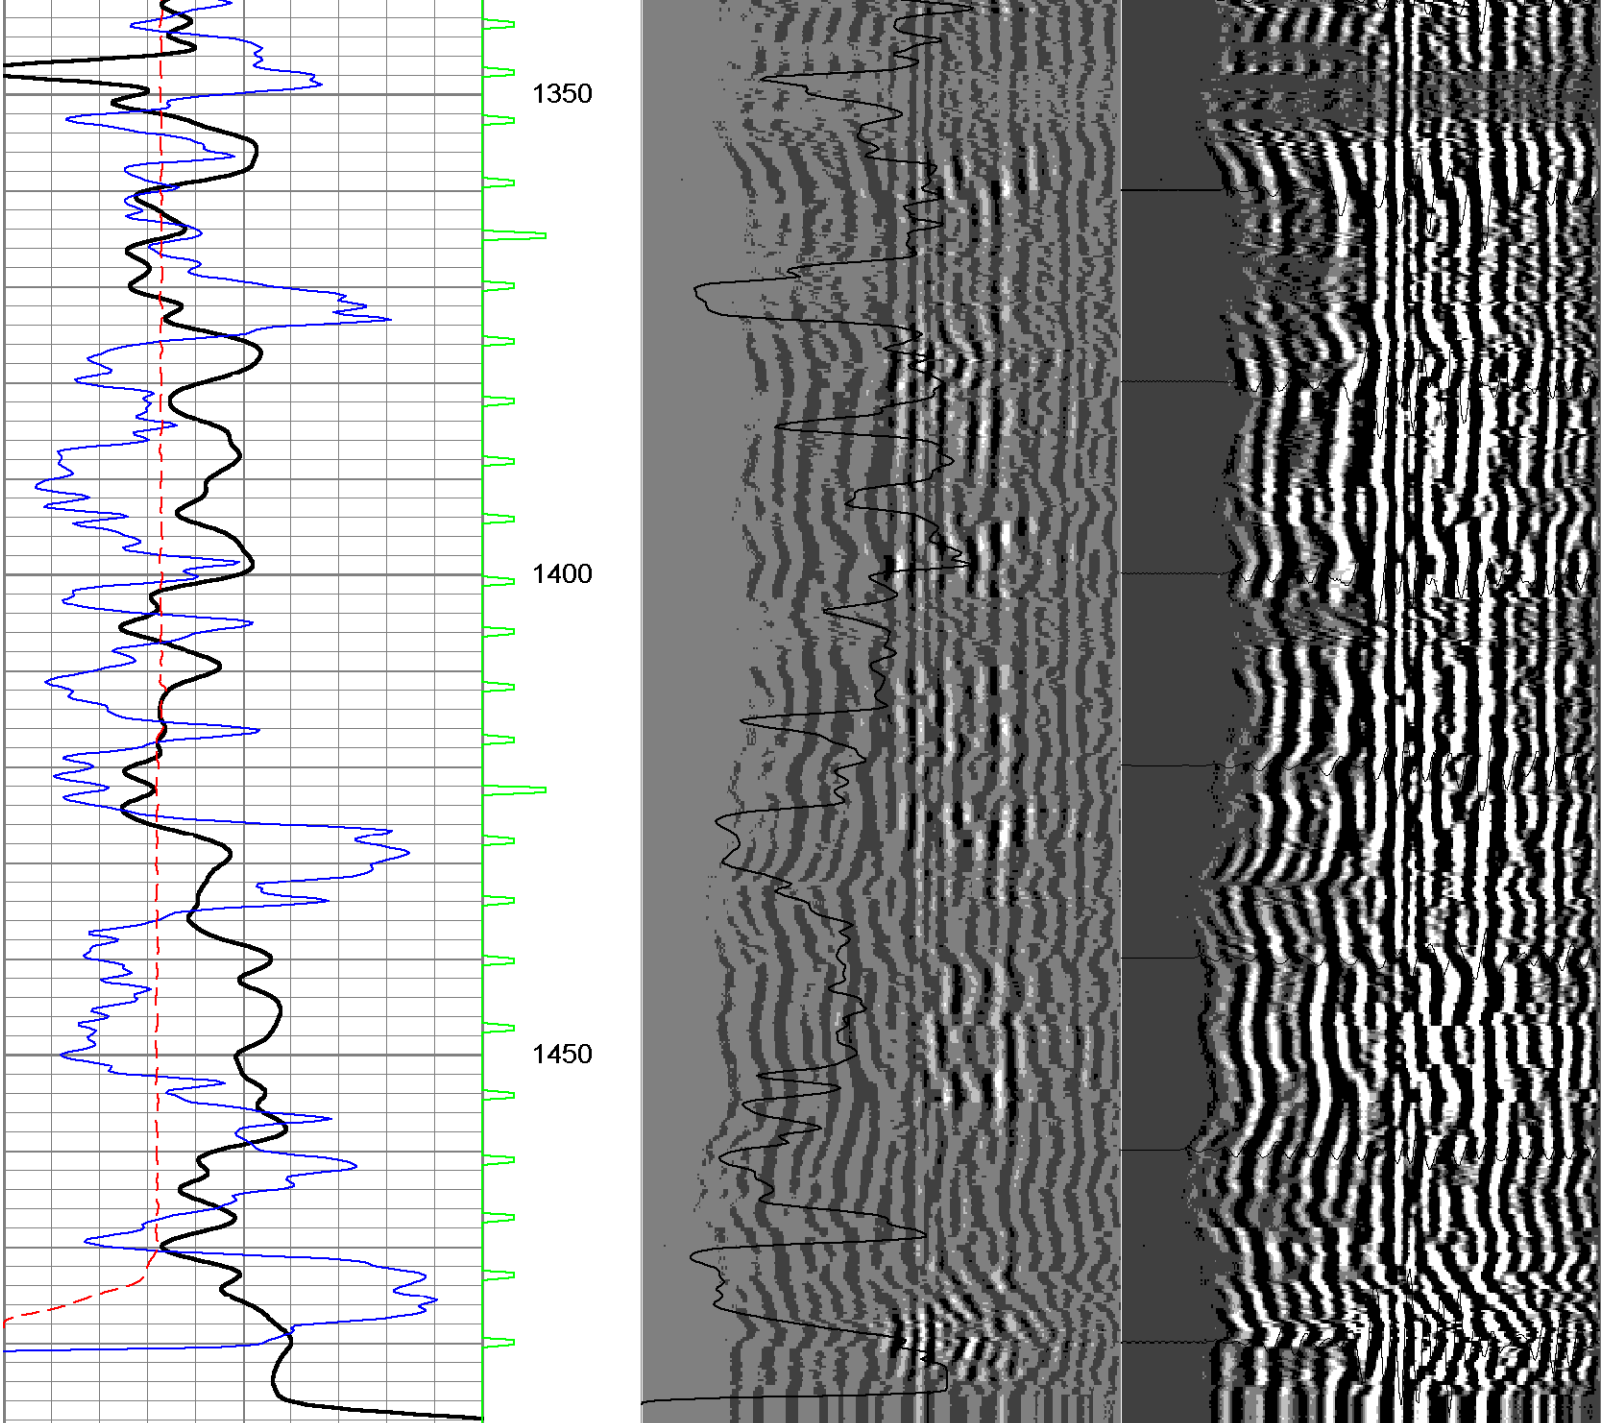

250	DT (usec/ft)	50	ITT (msec)	500	Variable Density 5 ft	1600	500	Variable Density 5ft	1600
40	Gamma Ray (GAPI)	100		0	RLL3 (Ohm-m)	100	500	Signature	1600
0	Line Speed (ft/min)	100							