PACIFIC SURVEYS

SONIC VELOCITY VARIABLE DENSITY

Job No. 17596

File No.

Company US GEOLOGICAL SURVEY

Well TMVC

Field TEMECULA

County RIVERSIDE State CA

Location:

36601 WINNER'S CIRCLE
GPS: N 33o 30' 01" W 117o 00' 57"

Sec. Twp. Rge.

Other Services:

GR/LL3
ELOG
CALIPER

Permanent Datum	G.L.	Elevation 1263' above perm. datum	Elevation
Log Measured From	G.L. 0'		K.B.
Drilling Measured From	G.L.		D.F.
			G.L.

Date	08-24-2013		
Run Number	ONE		
Depth Driller	1033'		
Depth Logger	1030.5'		
Bottom Logged Interval	1030.5'		
Top Log Interval	0'		
Casing Driller	16" @ 59'		
Casing Logger	59'		
Bit Size	12.25 (59'-340')	9.875 (340'-952')	7.875" (952'-1030')
Type Fluid in Hole	BENTONITE		4.5" (1030'-1033')
Density / Viscosity	N/A		
pH / Fluid Loss	N/A		
Source of Sample	PIT		
Rm @ Meas. Temp	3.70 @ 77F		
Rmf @ Meas. Temp	3.44 @ 77F		
Rmc @ Meas. Temp	N/A		
Source of Rmf / Rmc	MEASURE		
Rm @ BHT	N/A		
Time Circulation Stopped	1600		
Time Logger on Bottom	1945		
Max. Recorded Temperature	N/A		
Equipment Number	PS-5		
Location	LA		
Recorded By	SCHUMACHER		
Witnessed By	--		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

Database File 17596.db
Dataset Pathname SNC
Presentation Format slt
Dataset Creation Sat Aug 24 22:32:14 2013
Charted by Depth in Feet scaled 1:240

280	Delta Time (usec/ft)	80	ITT	400	Variable Density 5 ft	1600	400	Variable Density 5 ft	2400
10	Gamma-Ray (GAPI)	110	5 (msec) 0	0	RLL3 (Ohm-m)	100			
				100	RLL3 back-up (Ohm-m)	1000			

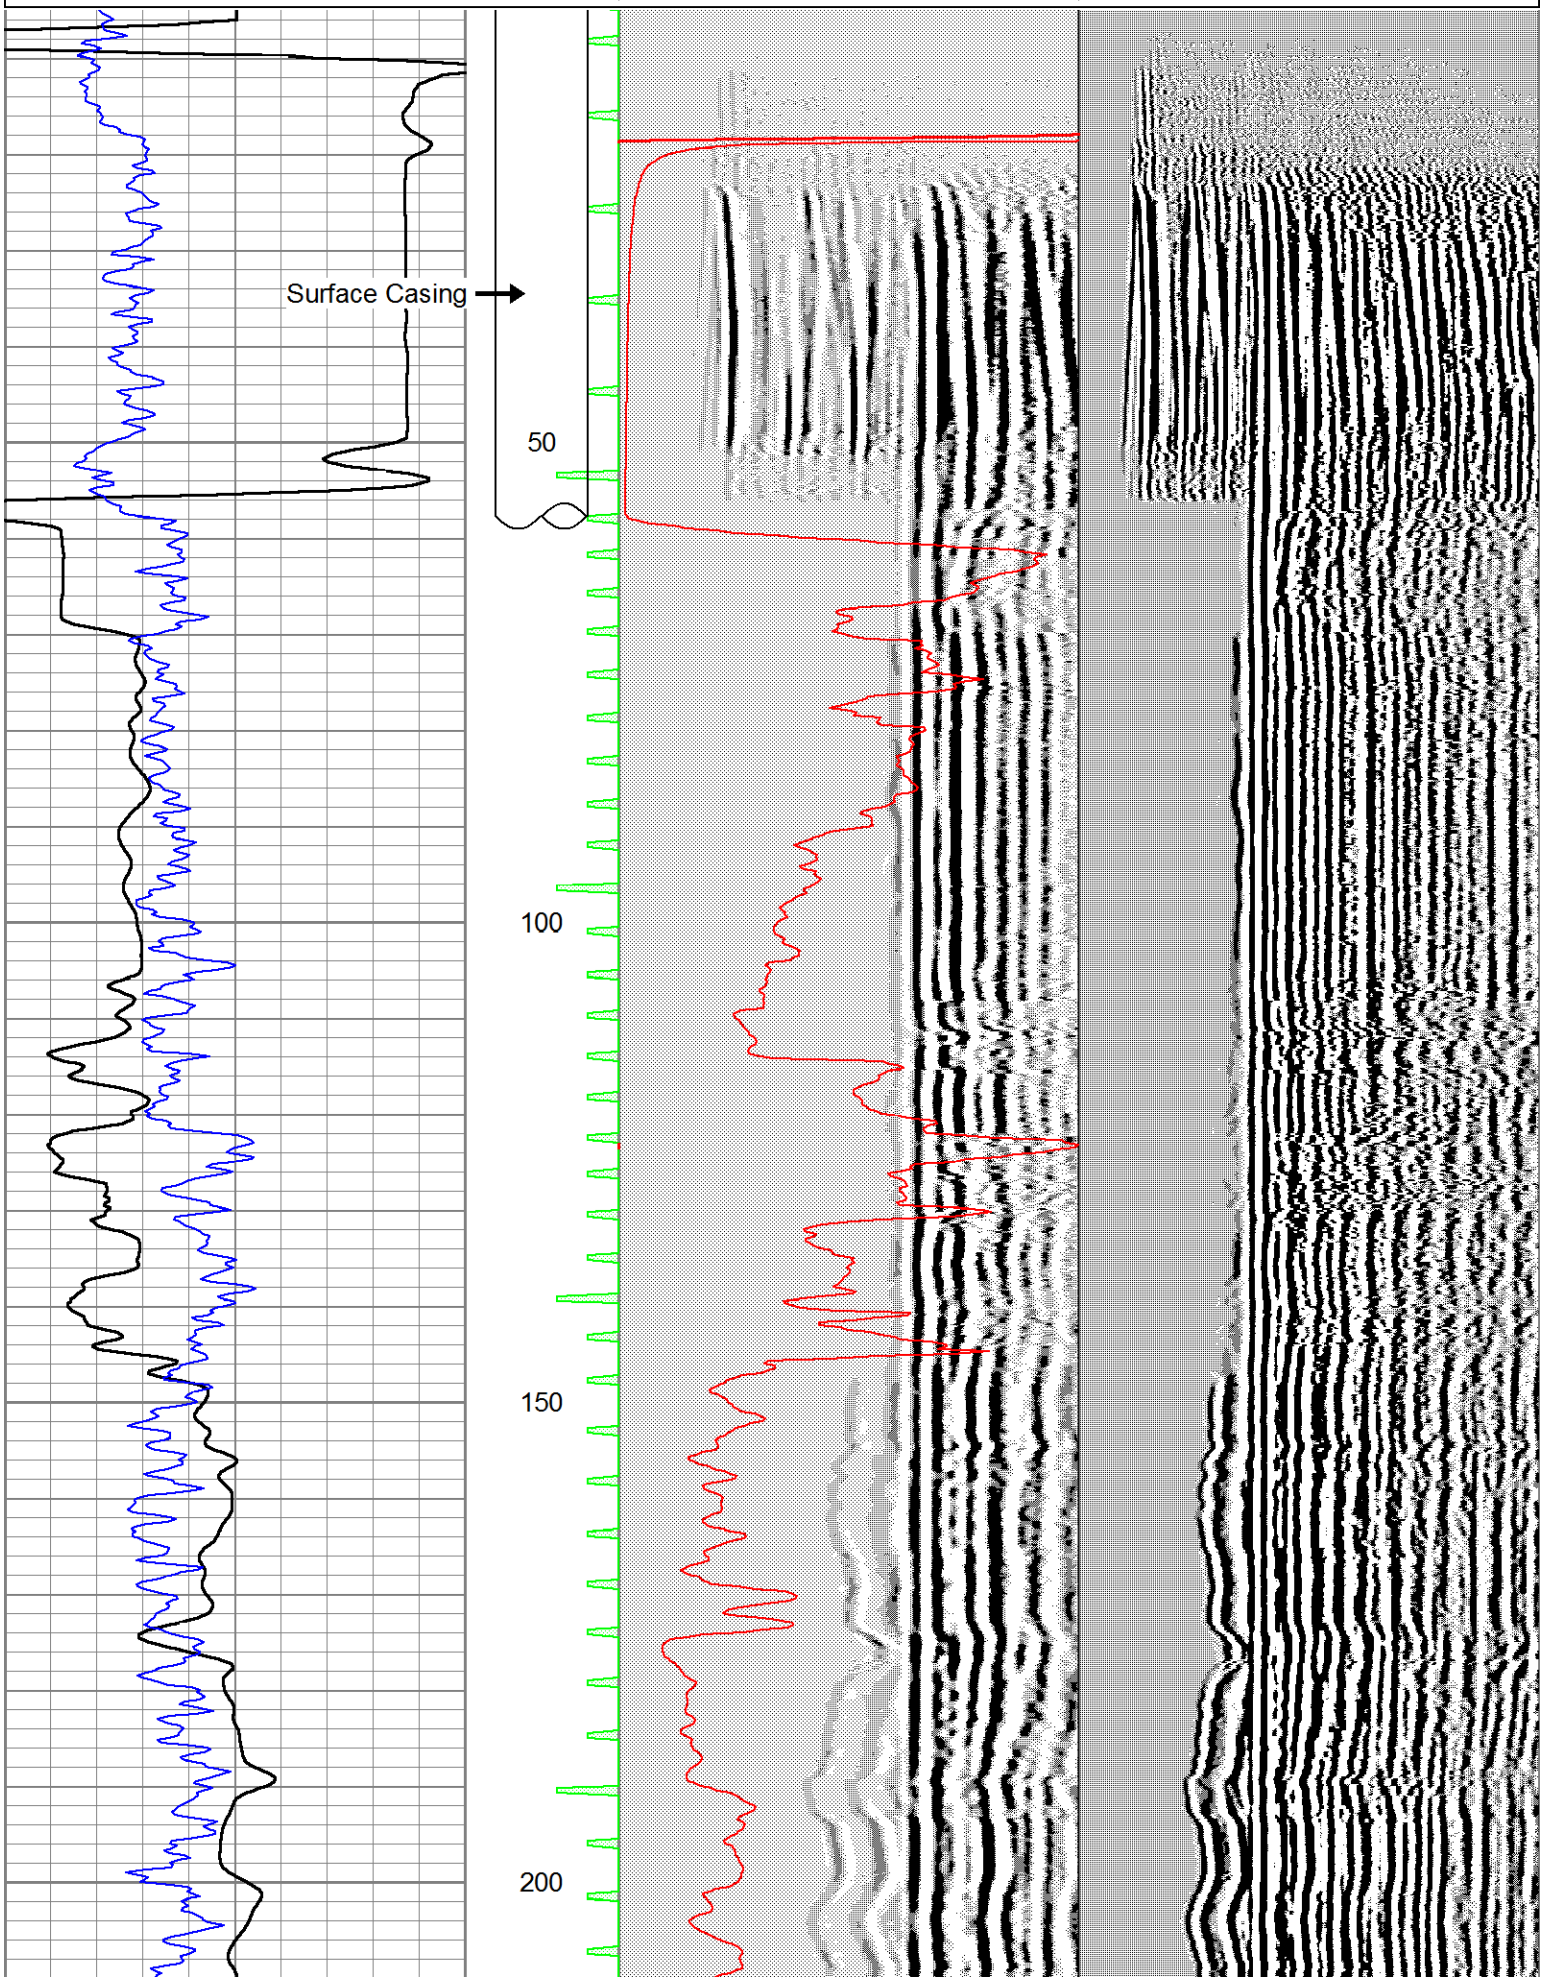

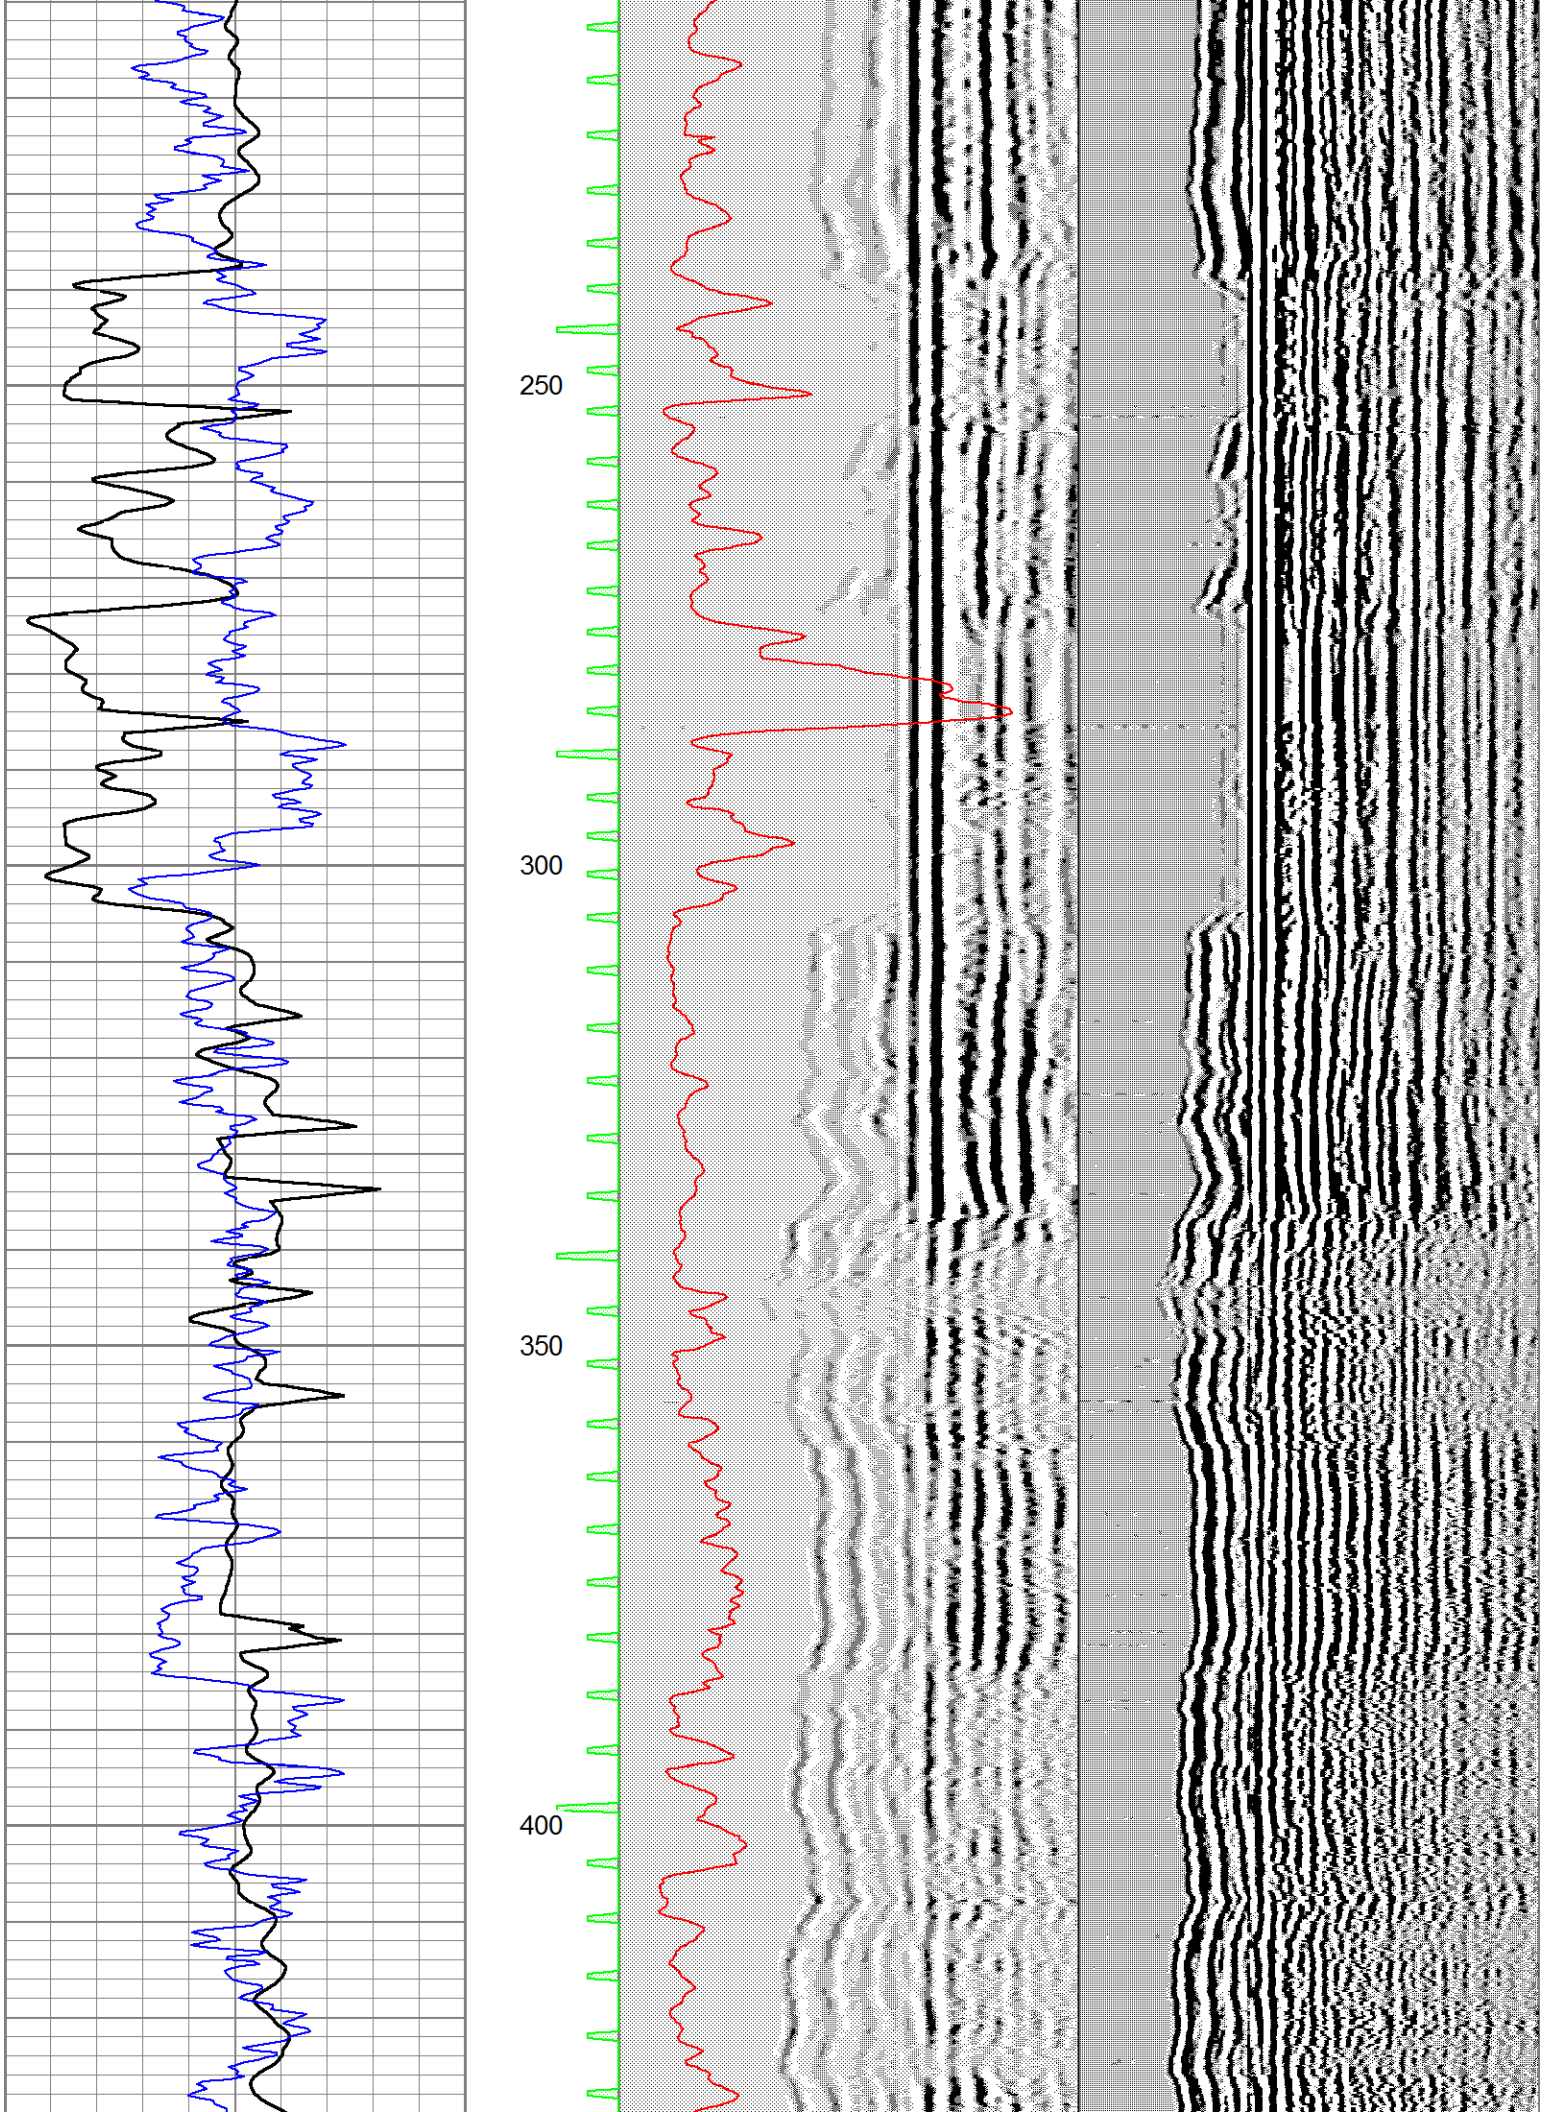
250
300
350
400

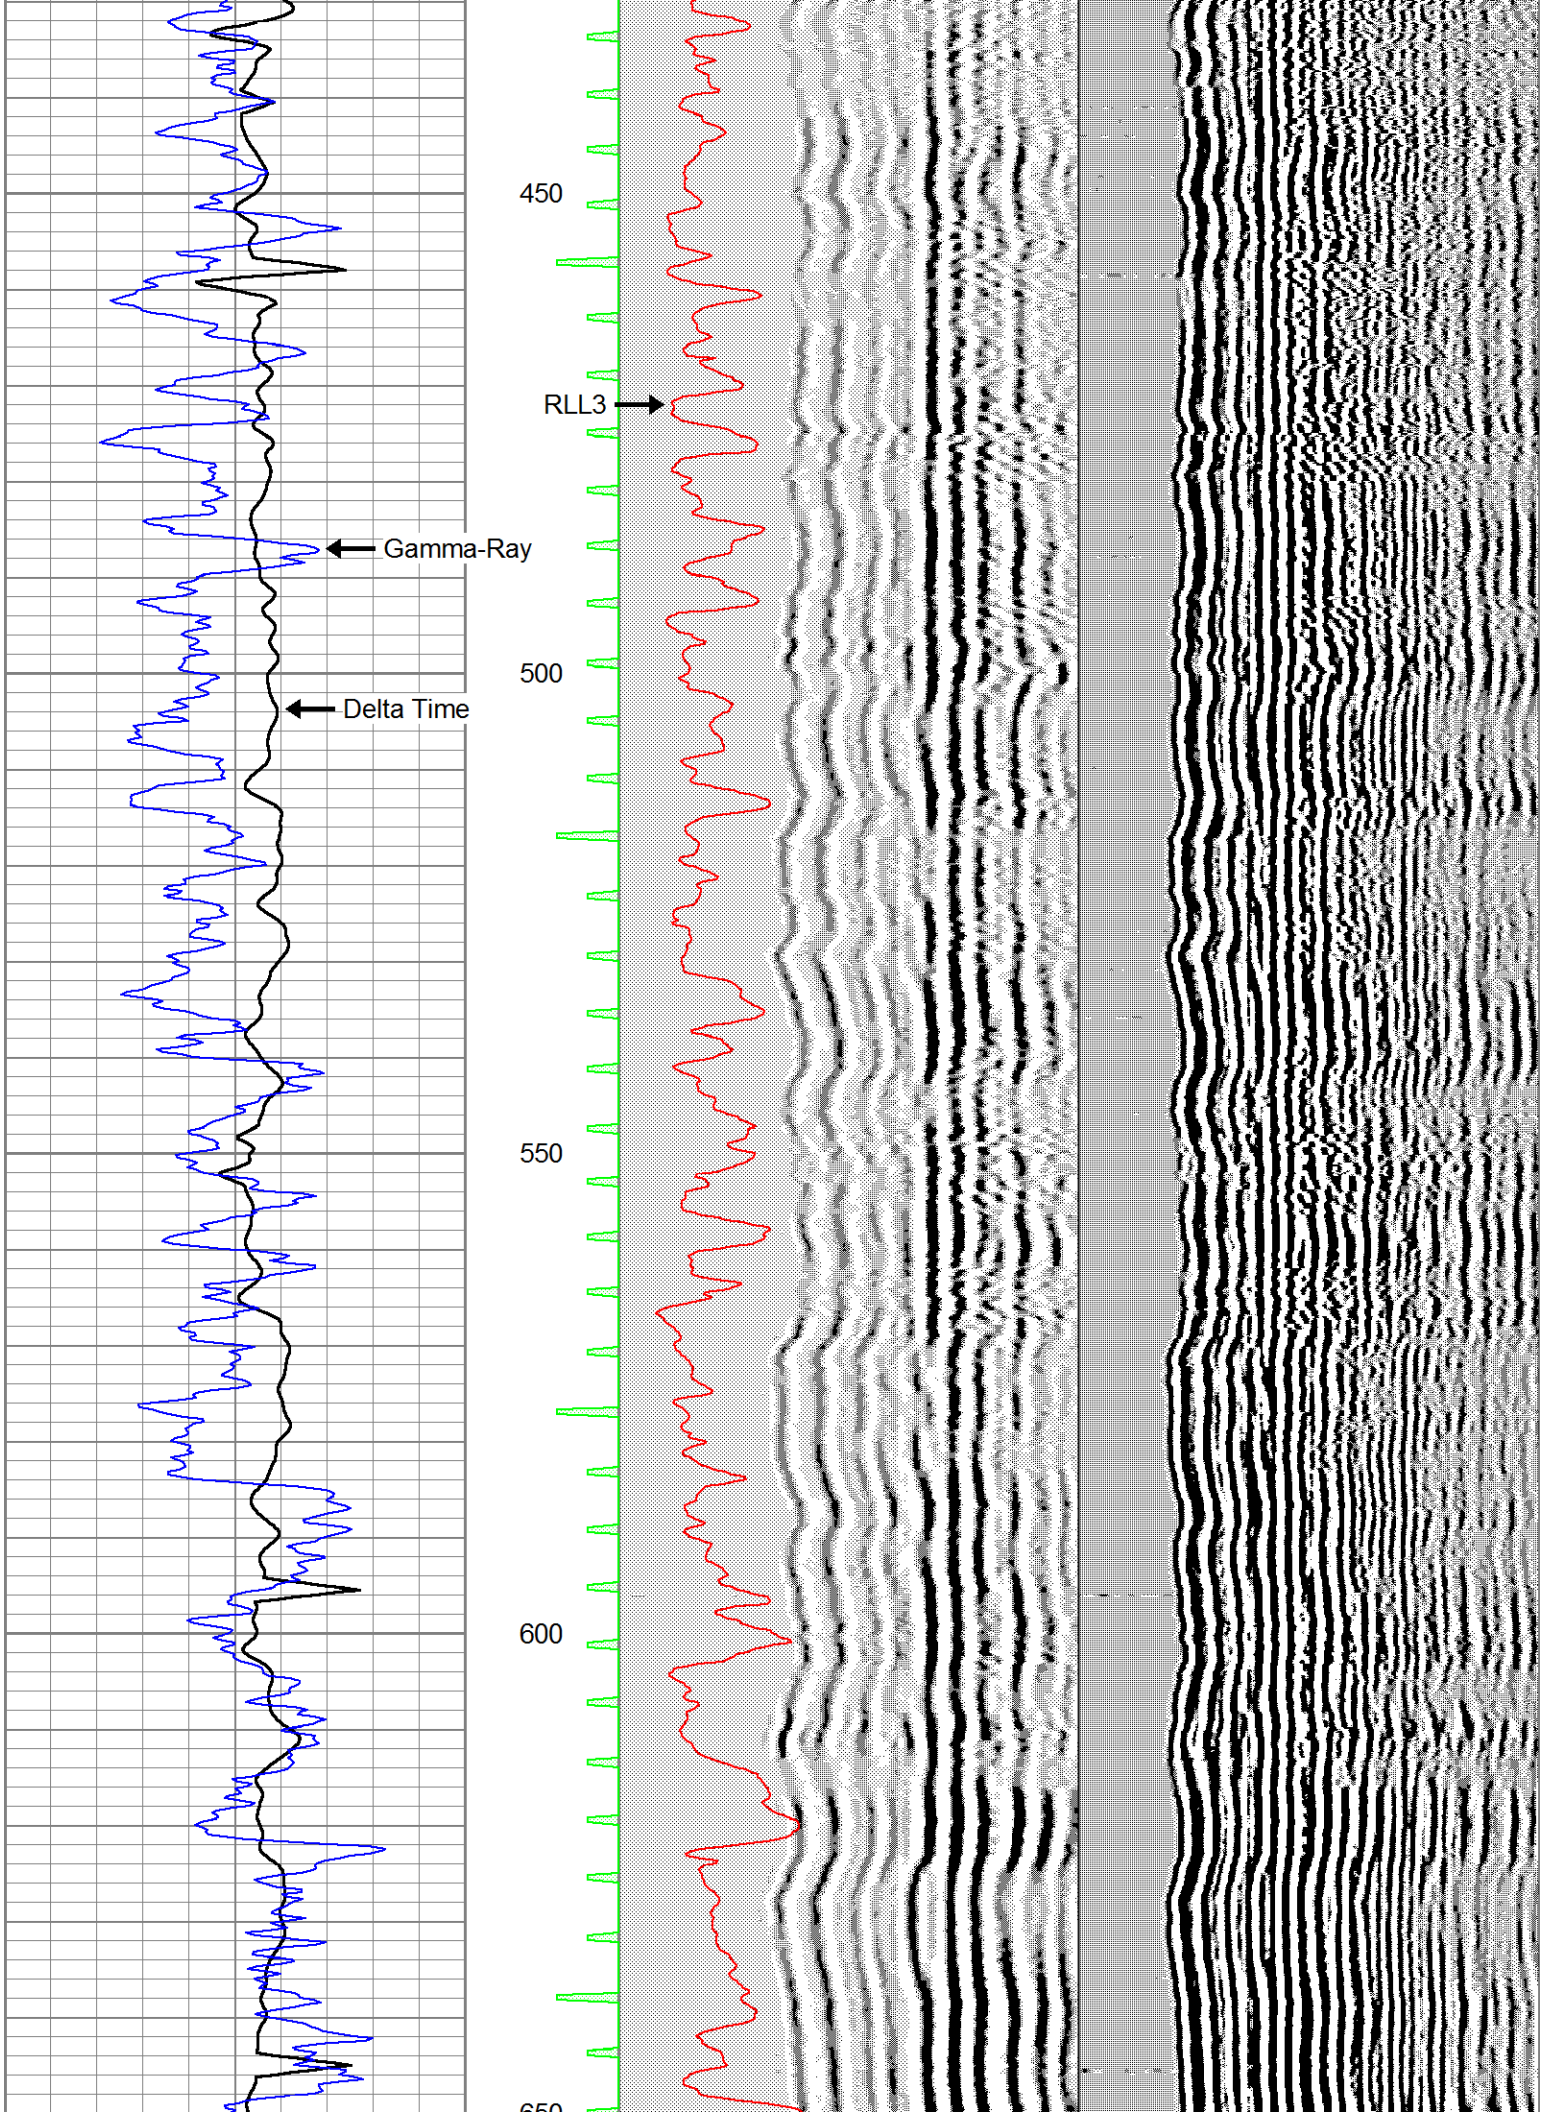
450
RLL3
Gamma-Ray
500
Delta Time
550
600
650

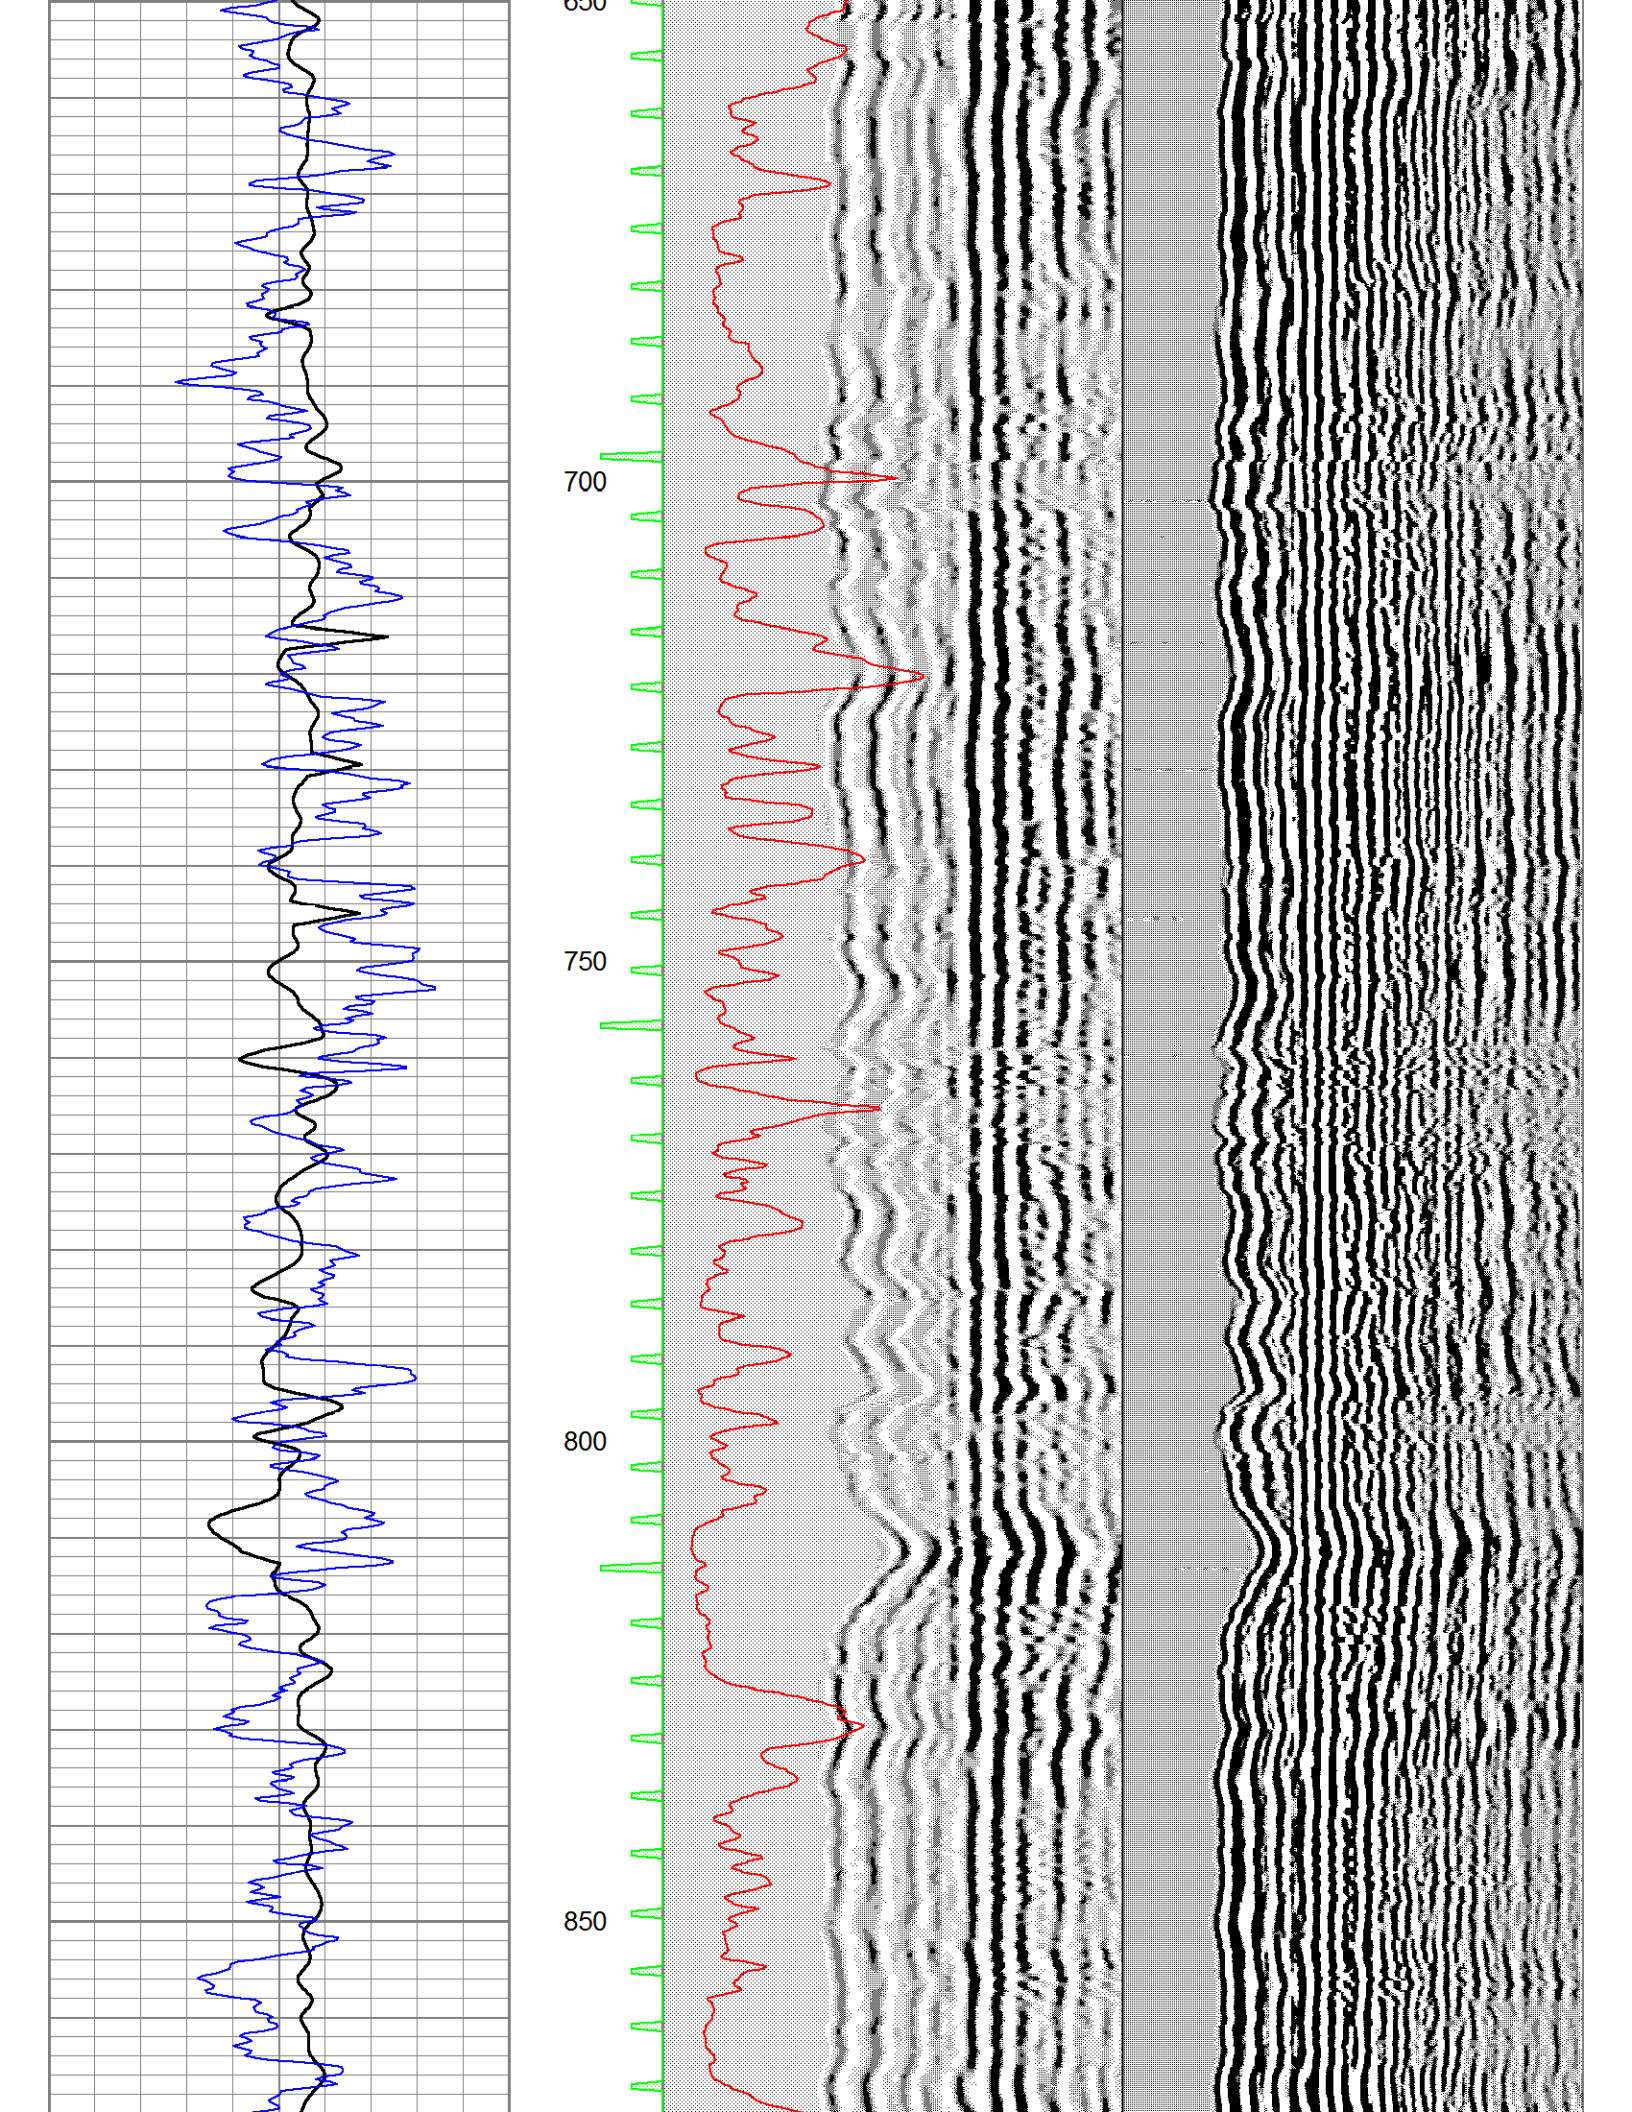
650
700
750
800
850

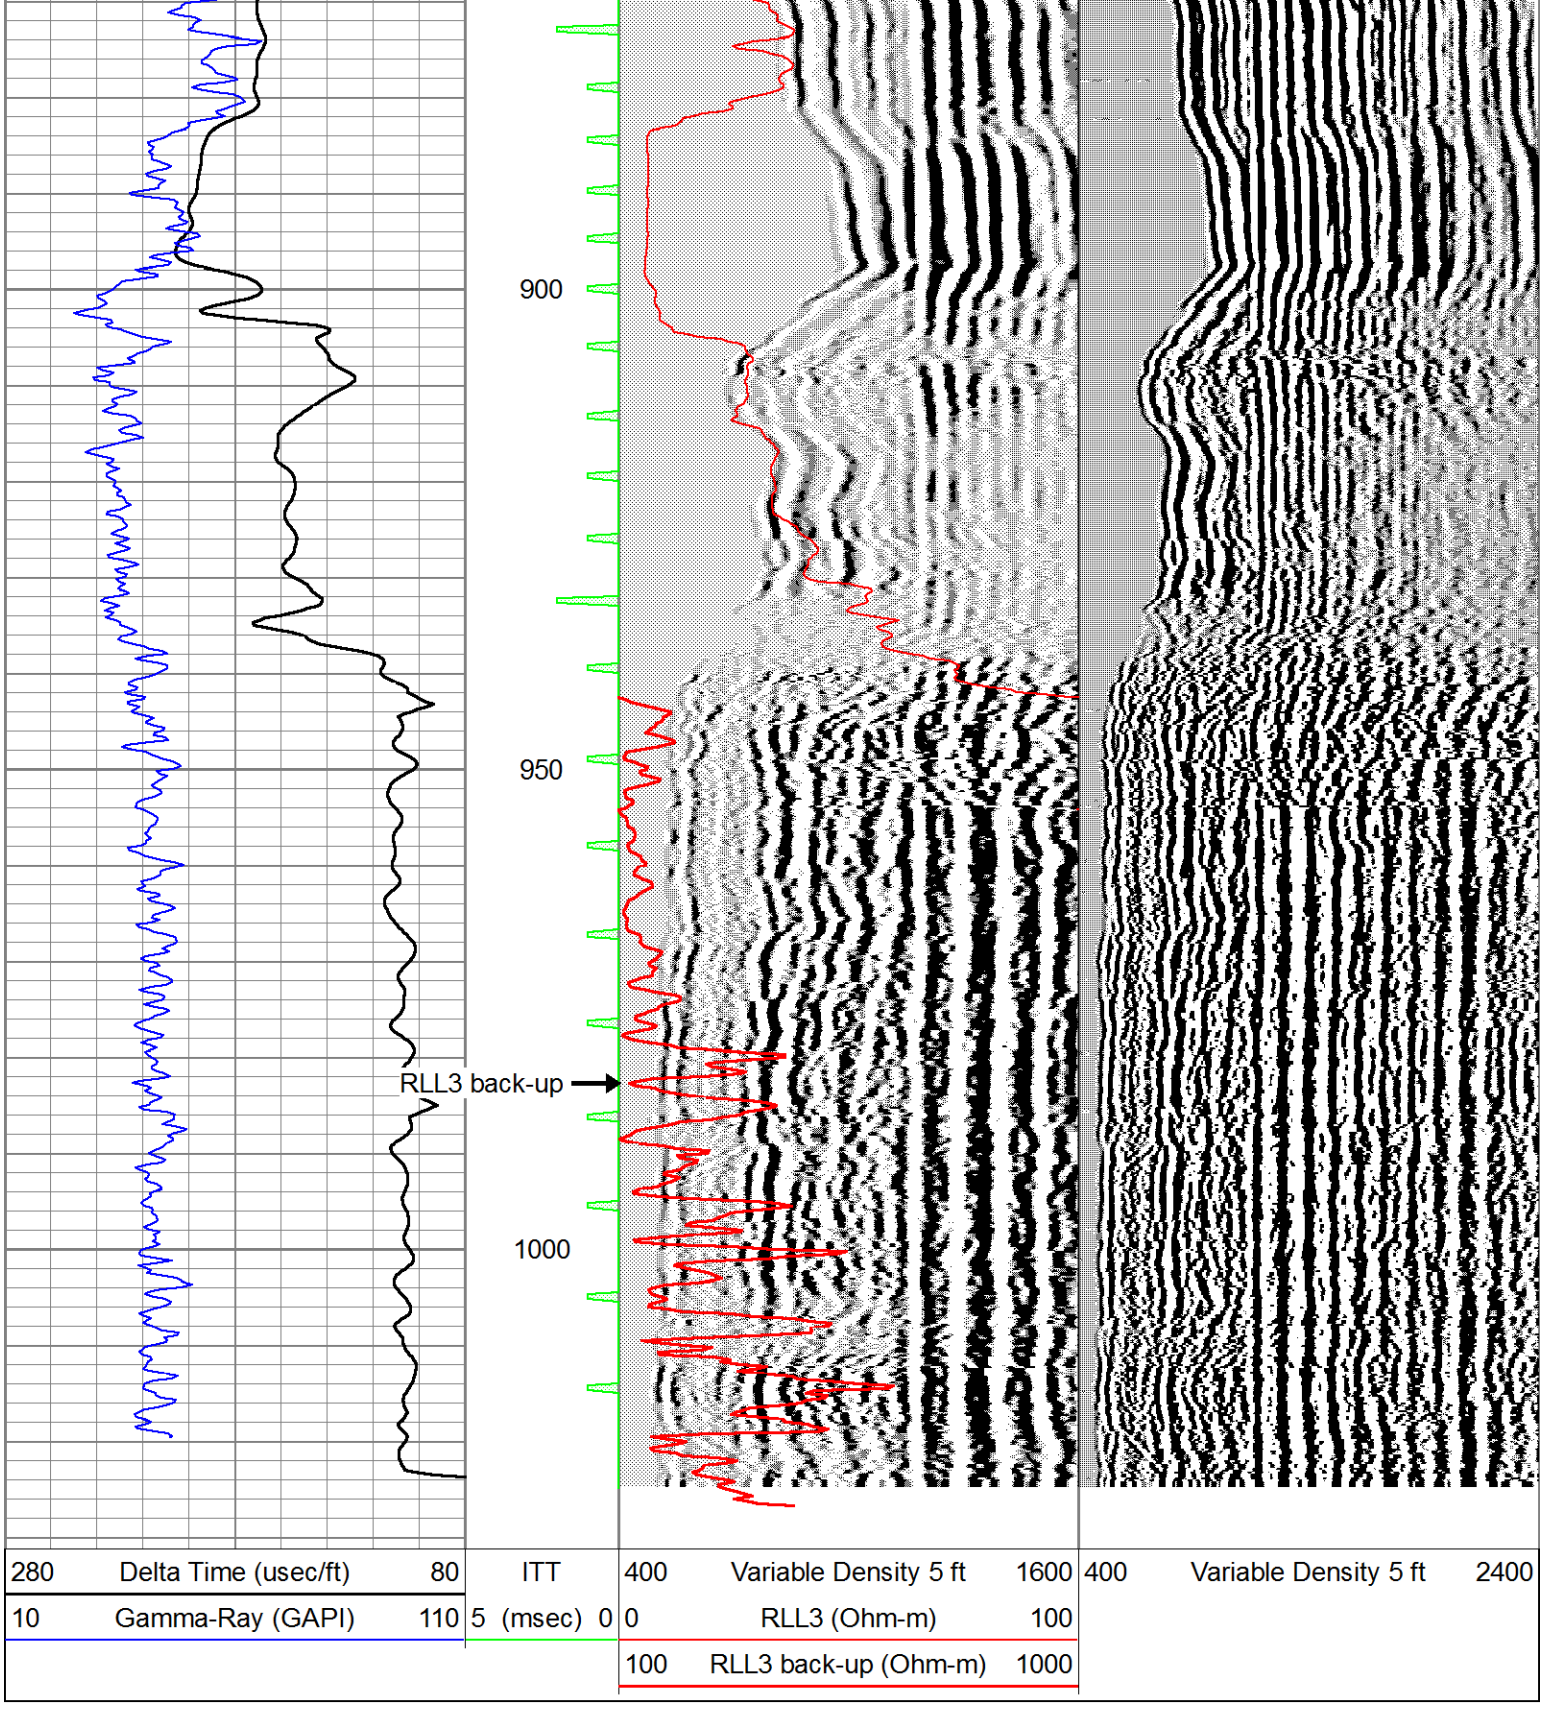

280	Delta Time (usec/ft)	80	ITT	400	Variable Density 5 ft	1600	400	Variable Density 5 ft	2400
10	Gamma-Ray (GAPI)	110	5 (msec) 0	0	RLL3 (Ohm-m)	100			
				100	RLL3 back-up (Ohm-m)	1000			