PACIFIC SURVEYS

SONIC VELOCITY VARIABLE DENSITY

Job No. 14335

Company U.S.G.S
Well SDOR
Field CHULA VISTA
County SAN DIEGO State CA

Location:

276 MACE STREET
N32*35.481' W117*03.238'

Sec. Twp. Rge.

Other Services:

ELOG
GR/LL3
CALIPER

Permanent Datum	G.L.	Elevation above perm. datum	Elevation K.B.
Log Measured From	G.L. 0'		D.F.
Drilling Measured From	G.L.		G.L.

Date	12/2/2008		
Run Number	ONE		
Depth Driller	1472'		
Depth Logger	1472'		
Bottom Logged Interval	1472'		
Top Log Interval	60'		
Casing Driller	15" @ 60'		
Casing Logger	60'		
Bit Size	13" @ 60'	6.25" @ 100'	5.75" @ 1260'
Type Fluid in Hole	BENTONITE		
Density / Viscosity	N/A		
pH / Fluid Loss	N/A		
Source of Sample	PIT		
Rm @ Meas. Temp	6.0 @ 77F		
Rmf @ Meas. Temp	6.6 @ 77F		
Rmc @ Meas. Temp	N/A		
Source of Rmf / Rmc	MEAS		
Rm @ BHT	N/A		
Time Circulation Stopped	3 HOURS		
Time Logger on Bottom	8:30 PM		
Max. Recorded Temperature	N/A		
Equipment Number	PS-1		
Location	L.A.		
Recorded By	J. ABREAU		
Witnessed By	T. BROWN		

<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

Database File: 14335.db
Dataset Pathname: usgs/well/run1/snc
Presentation Format: SLT
Dataset Creation: Tue Dec 02 22:14:40 2008 by Log Warrior Version 6.6
Charted by: Depth in Feet scaled 1:240

260	DT (usec/ft)	60	ITT (msec)	500	Variable Density 5 ft	1600	500	Variable Density 5 ft	1600
150	GR Back-up (GAPI)	250		0	RLL3 (Ohm-m)	50			

50	Gamma-Ray (GAPI)	150

50	RLL3 back-up (Ohm-m)	150

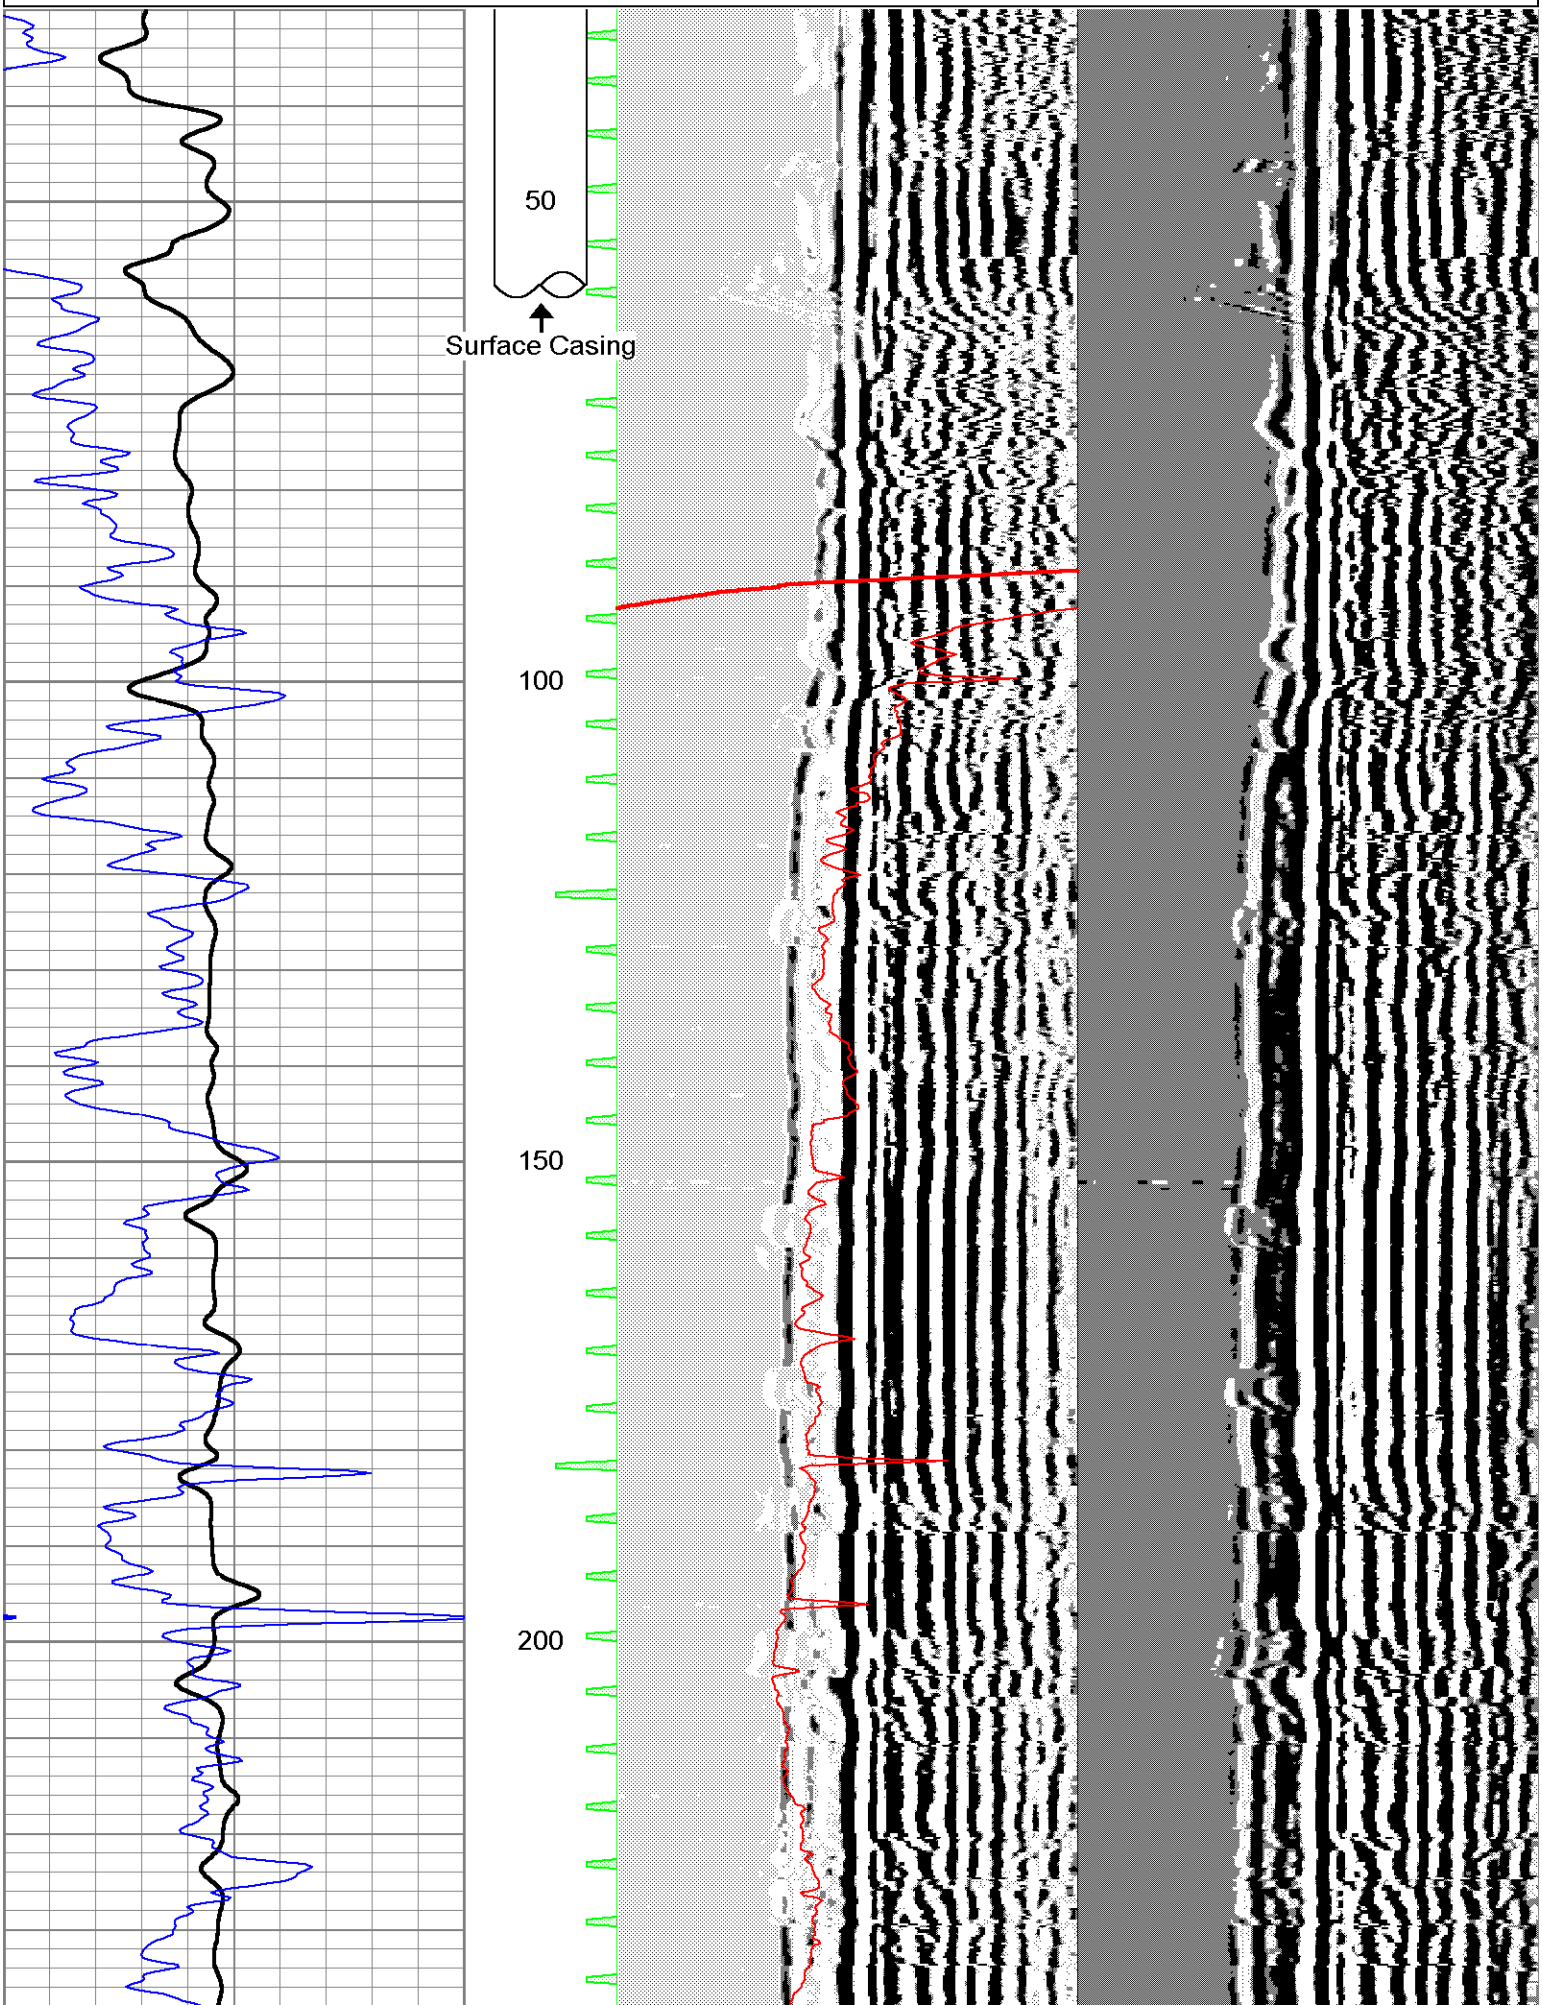

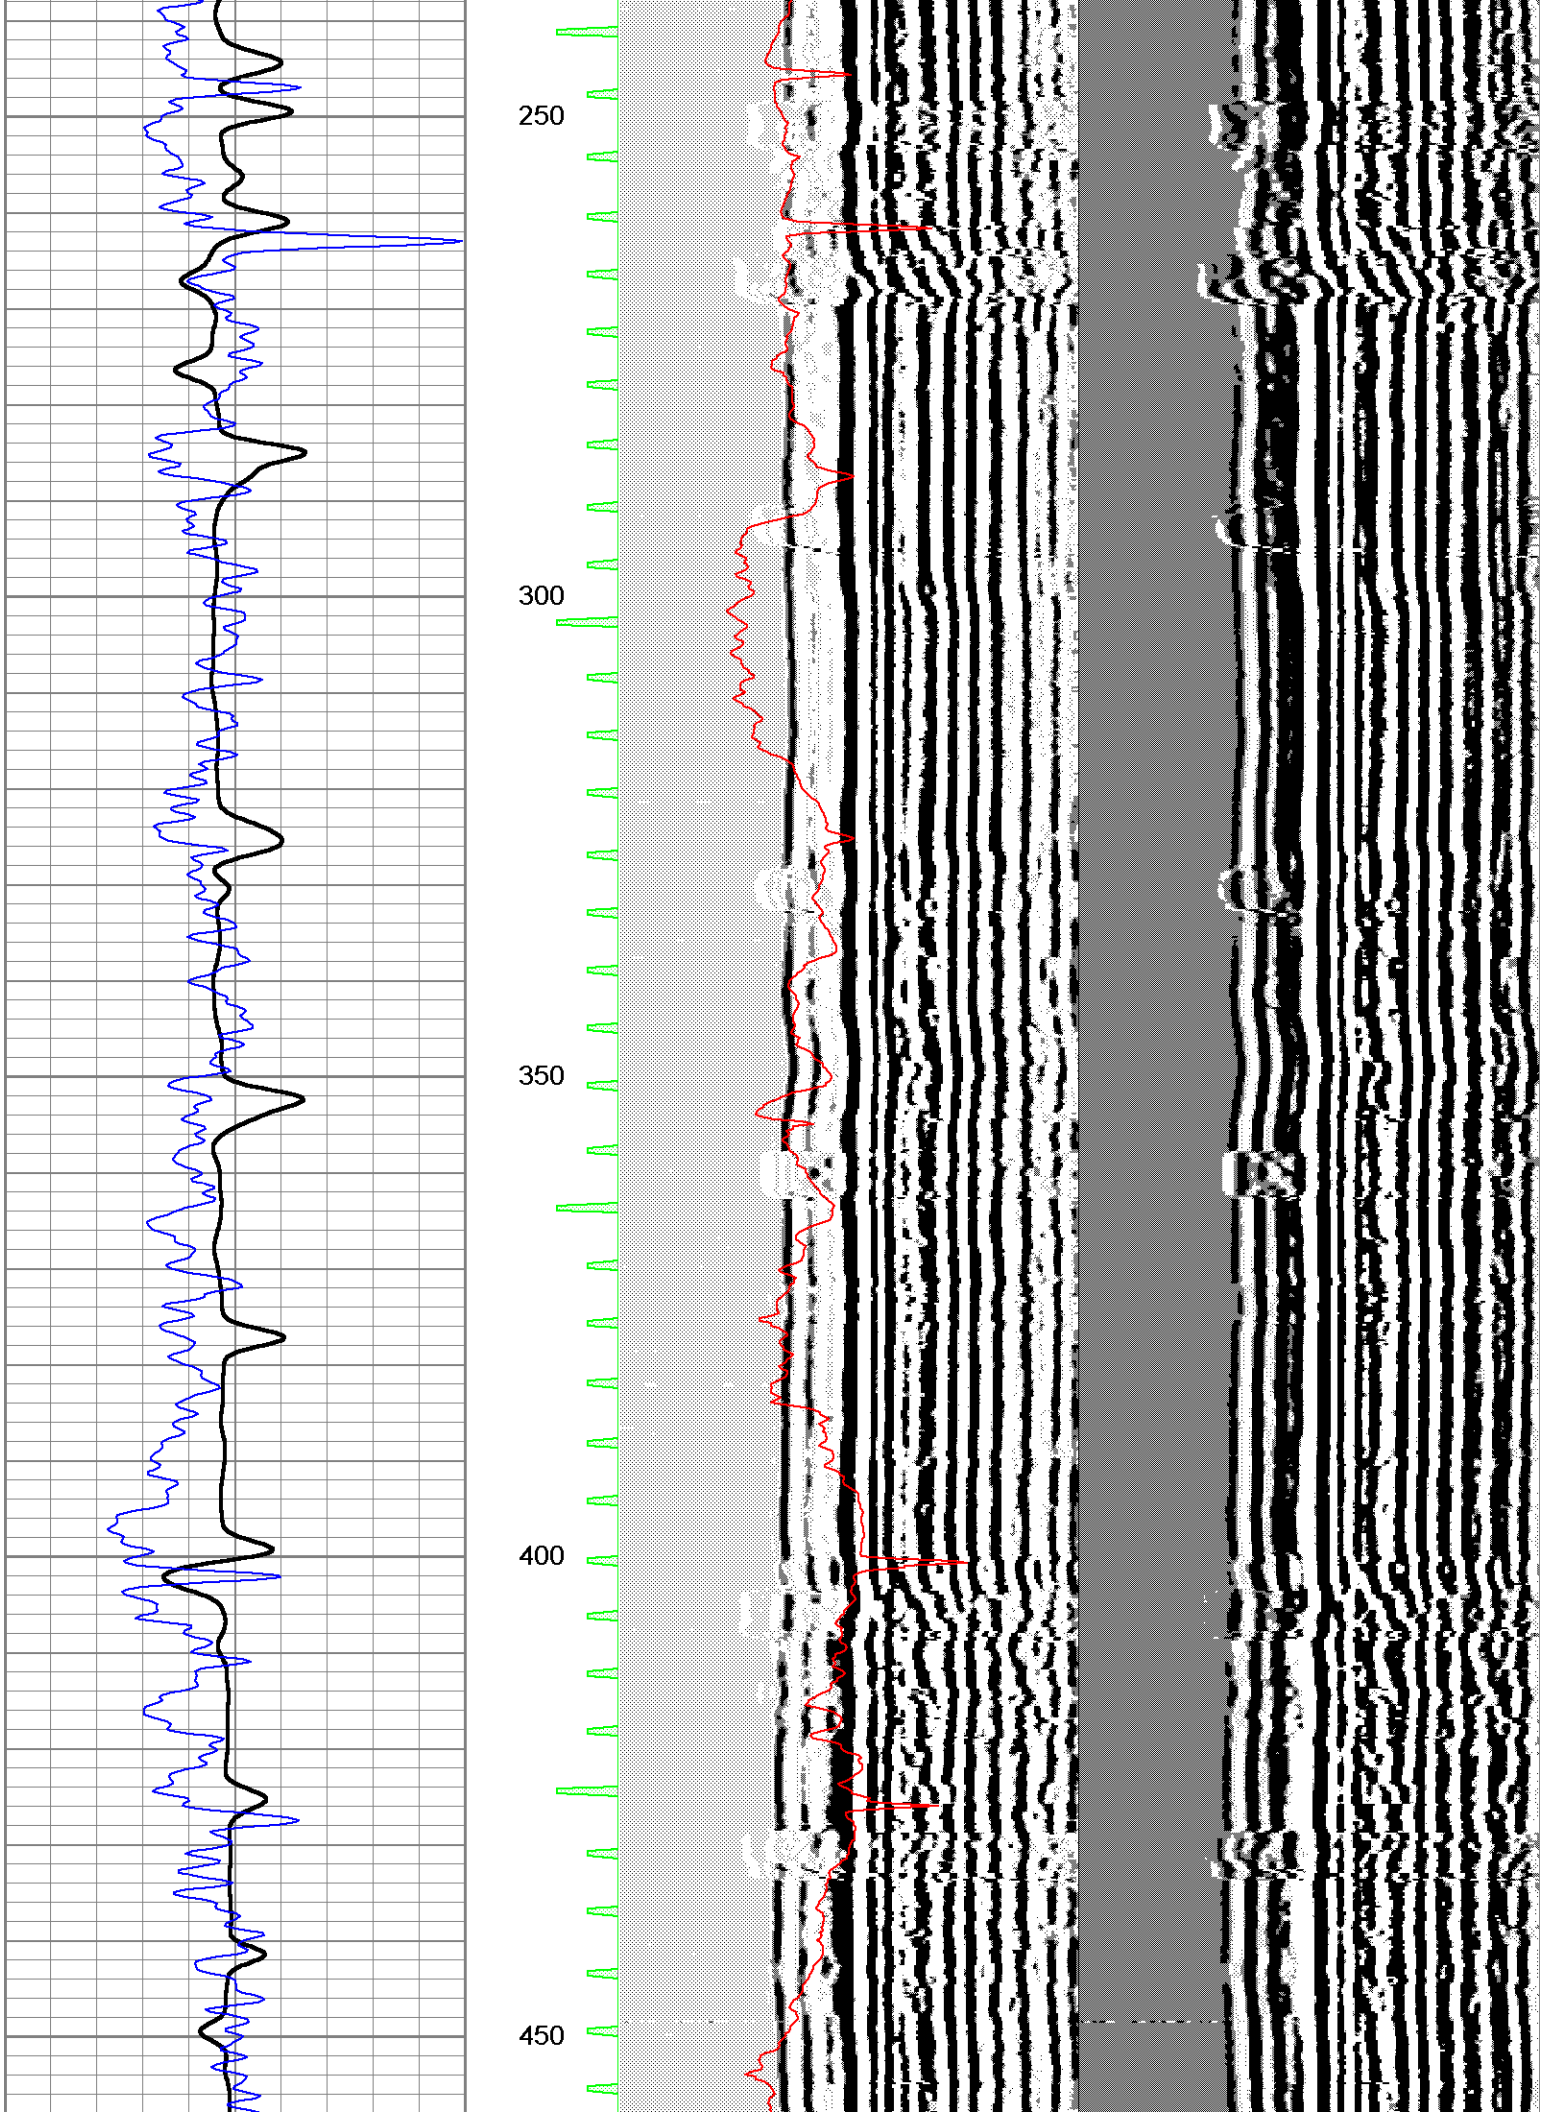
250
300
350
400
450

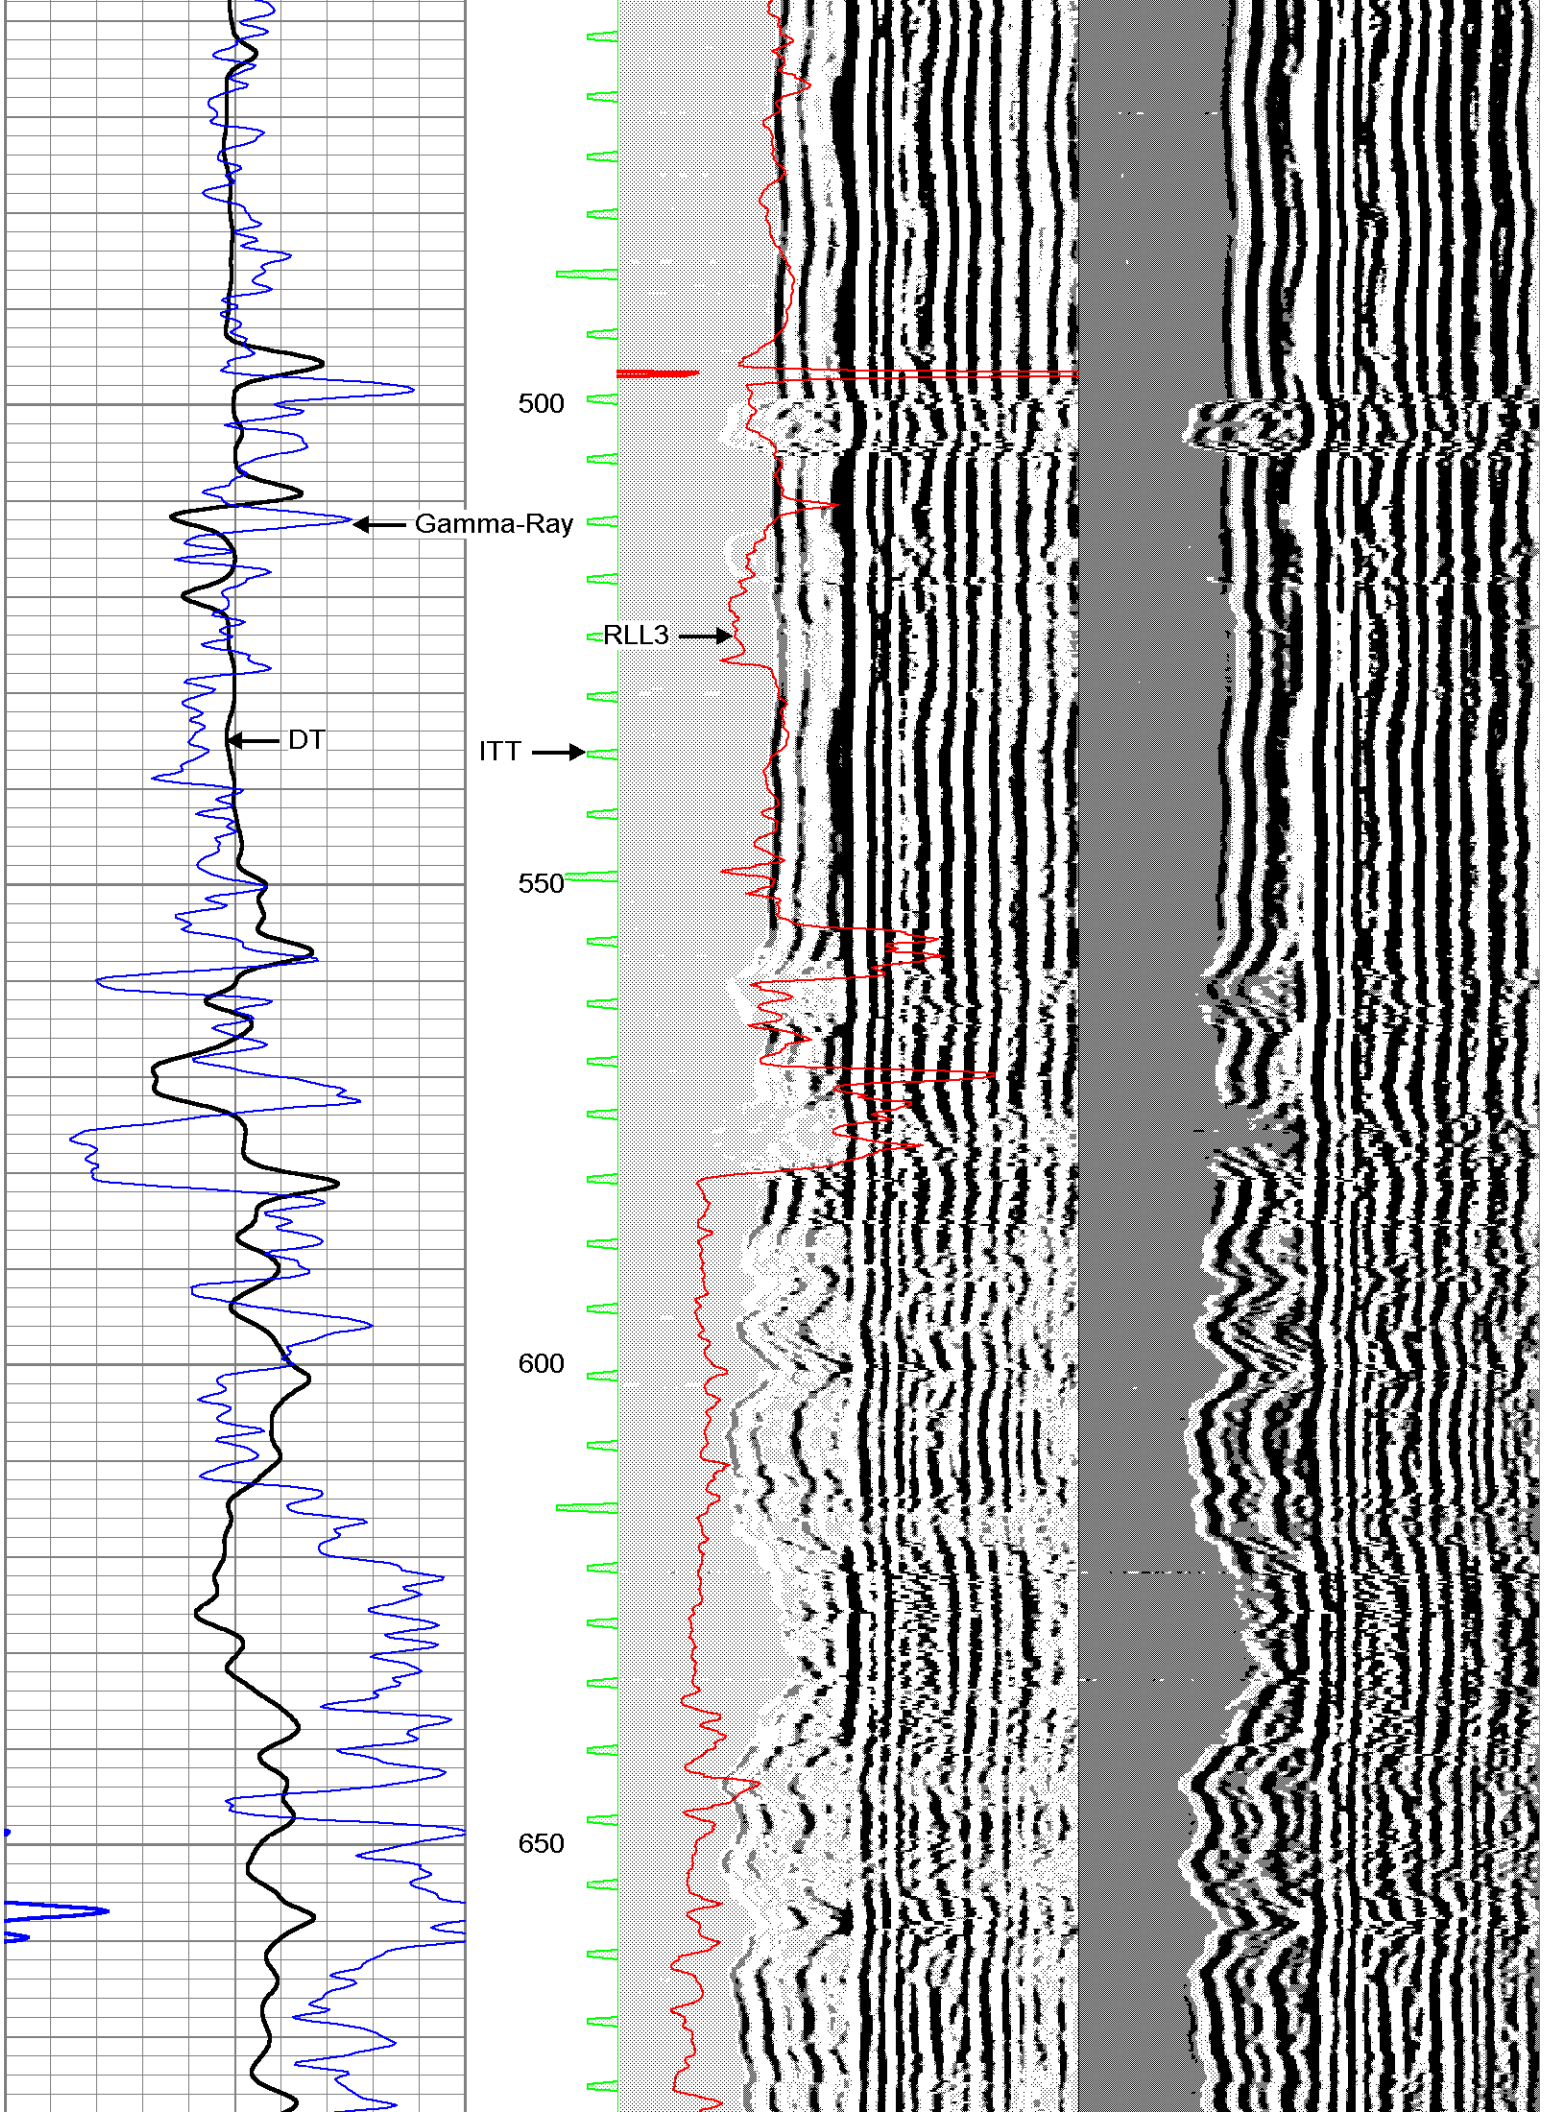
Gamma-Ray
DT
RLL3
ITT
500
550
600
650

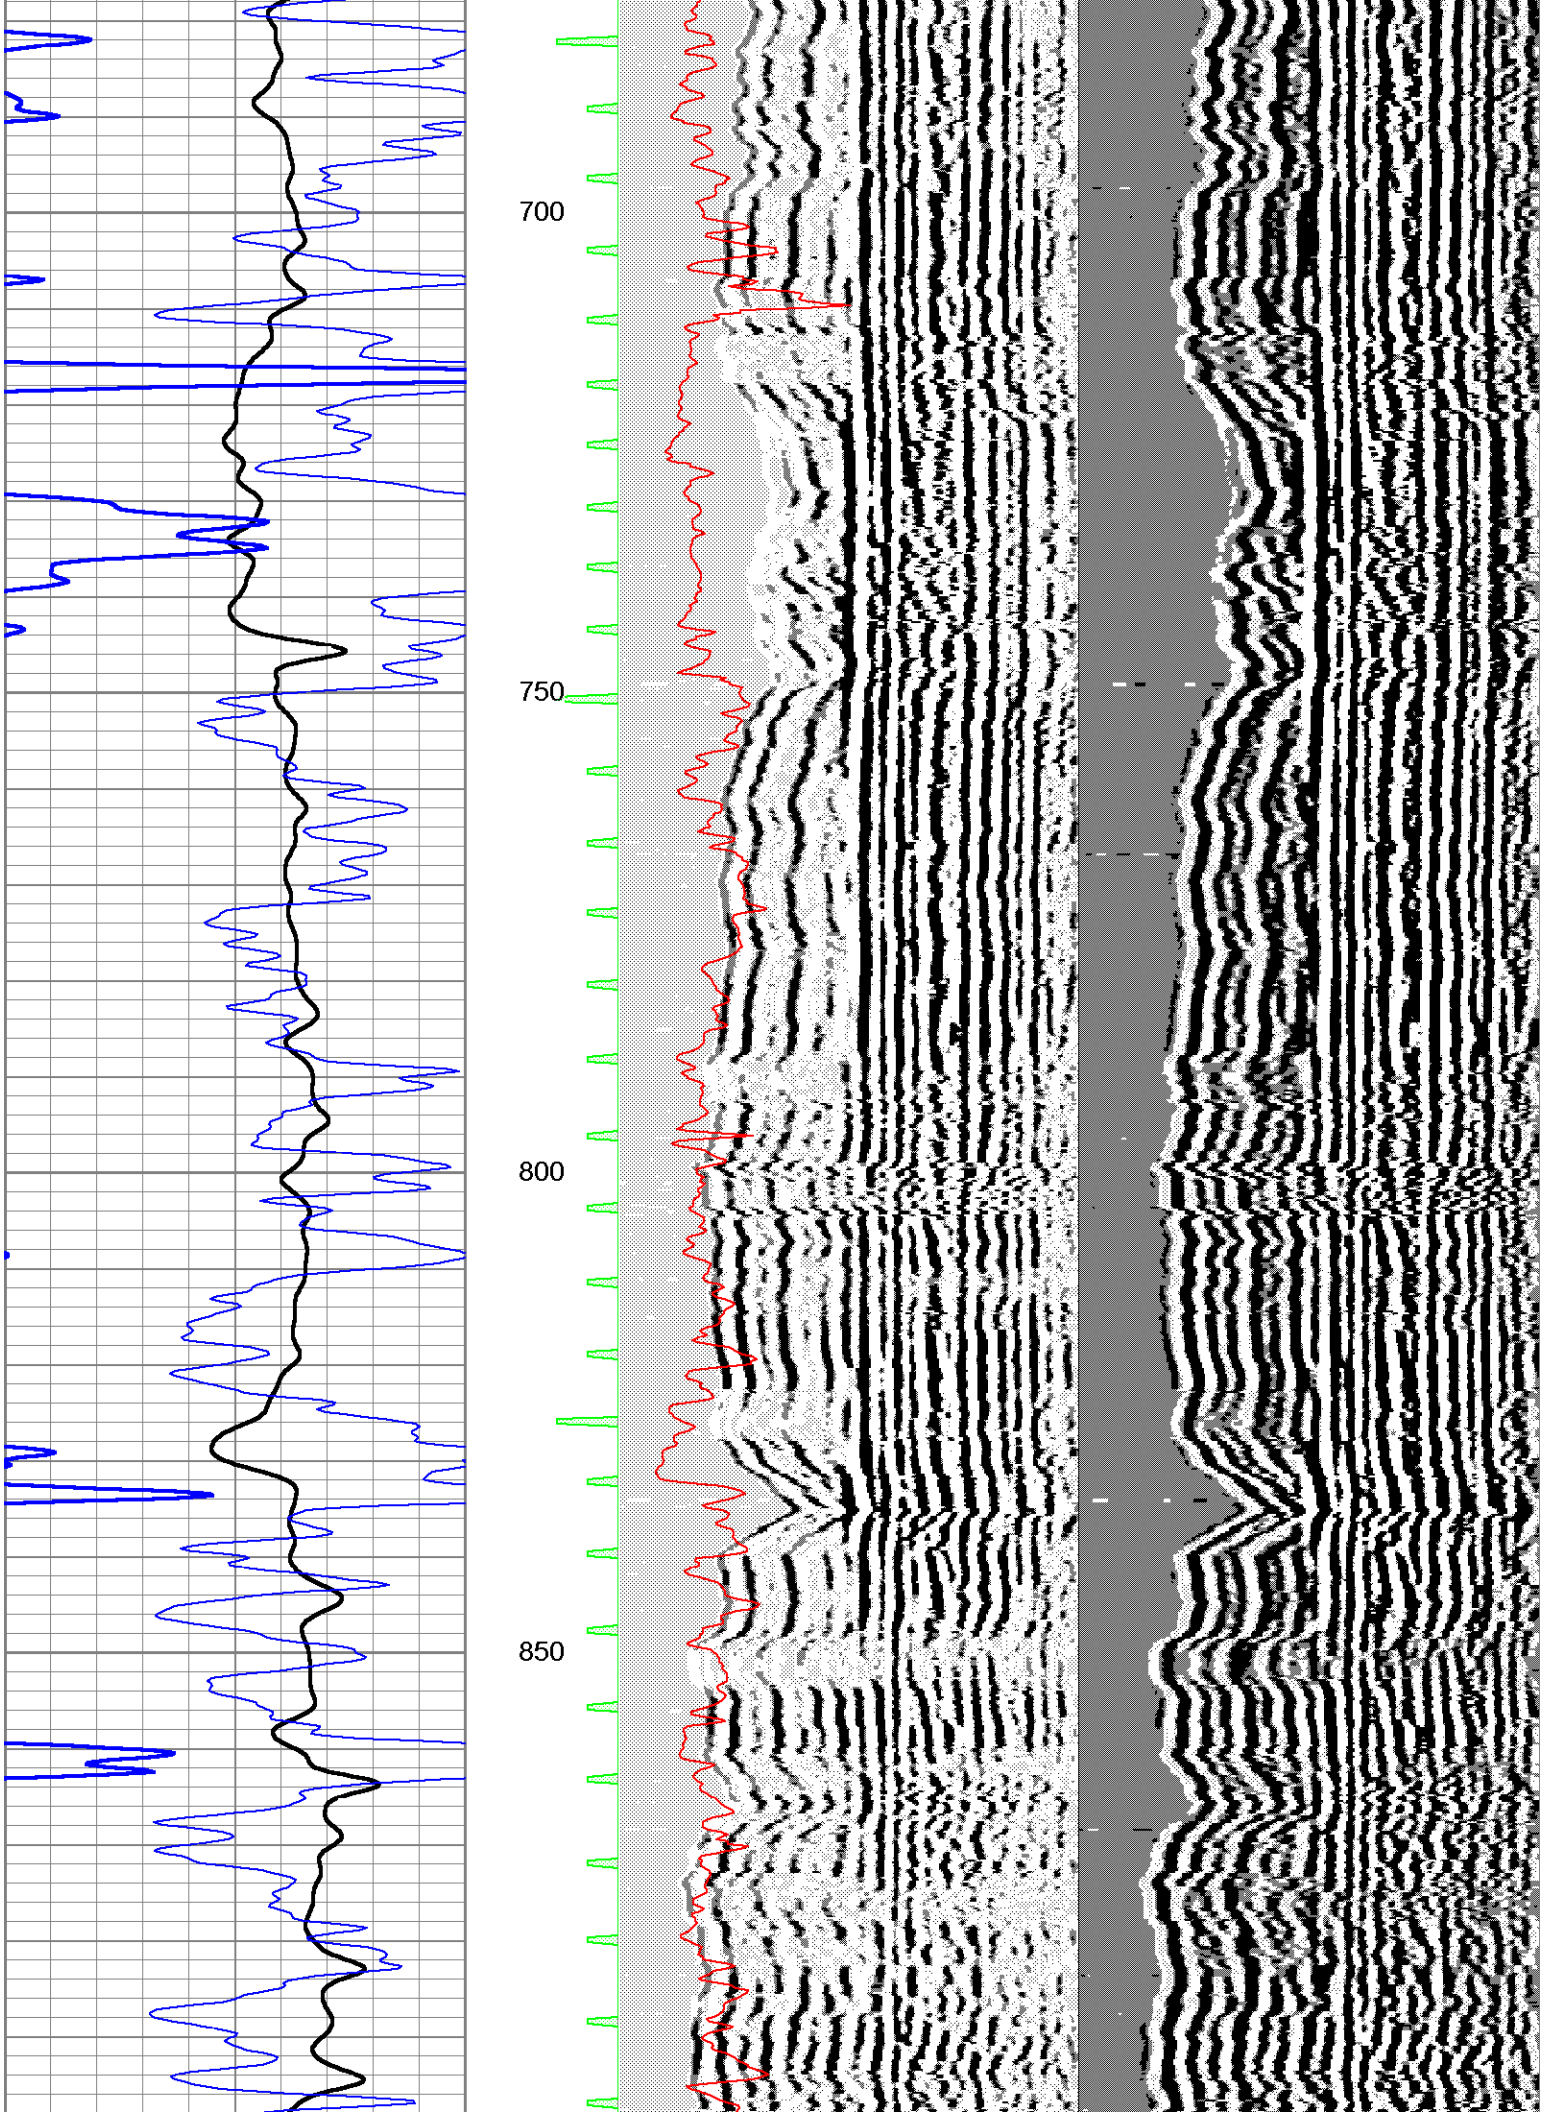
700
750
800
850

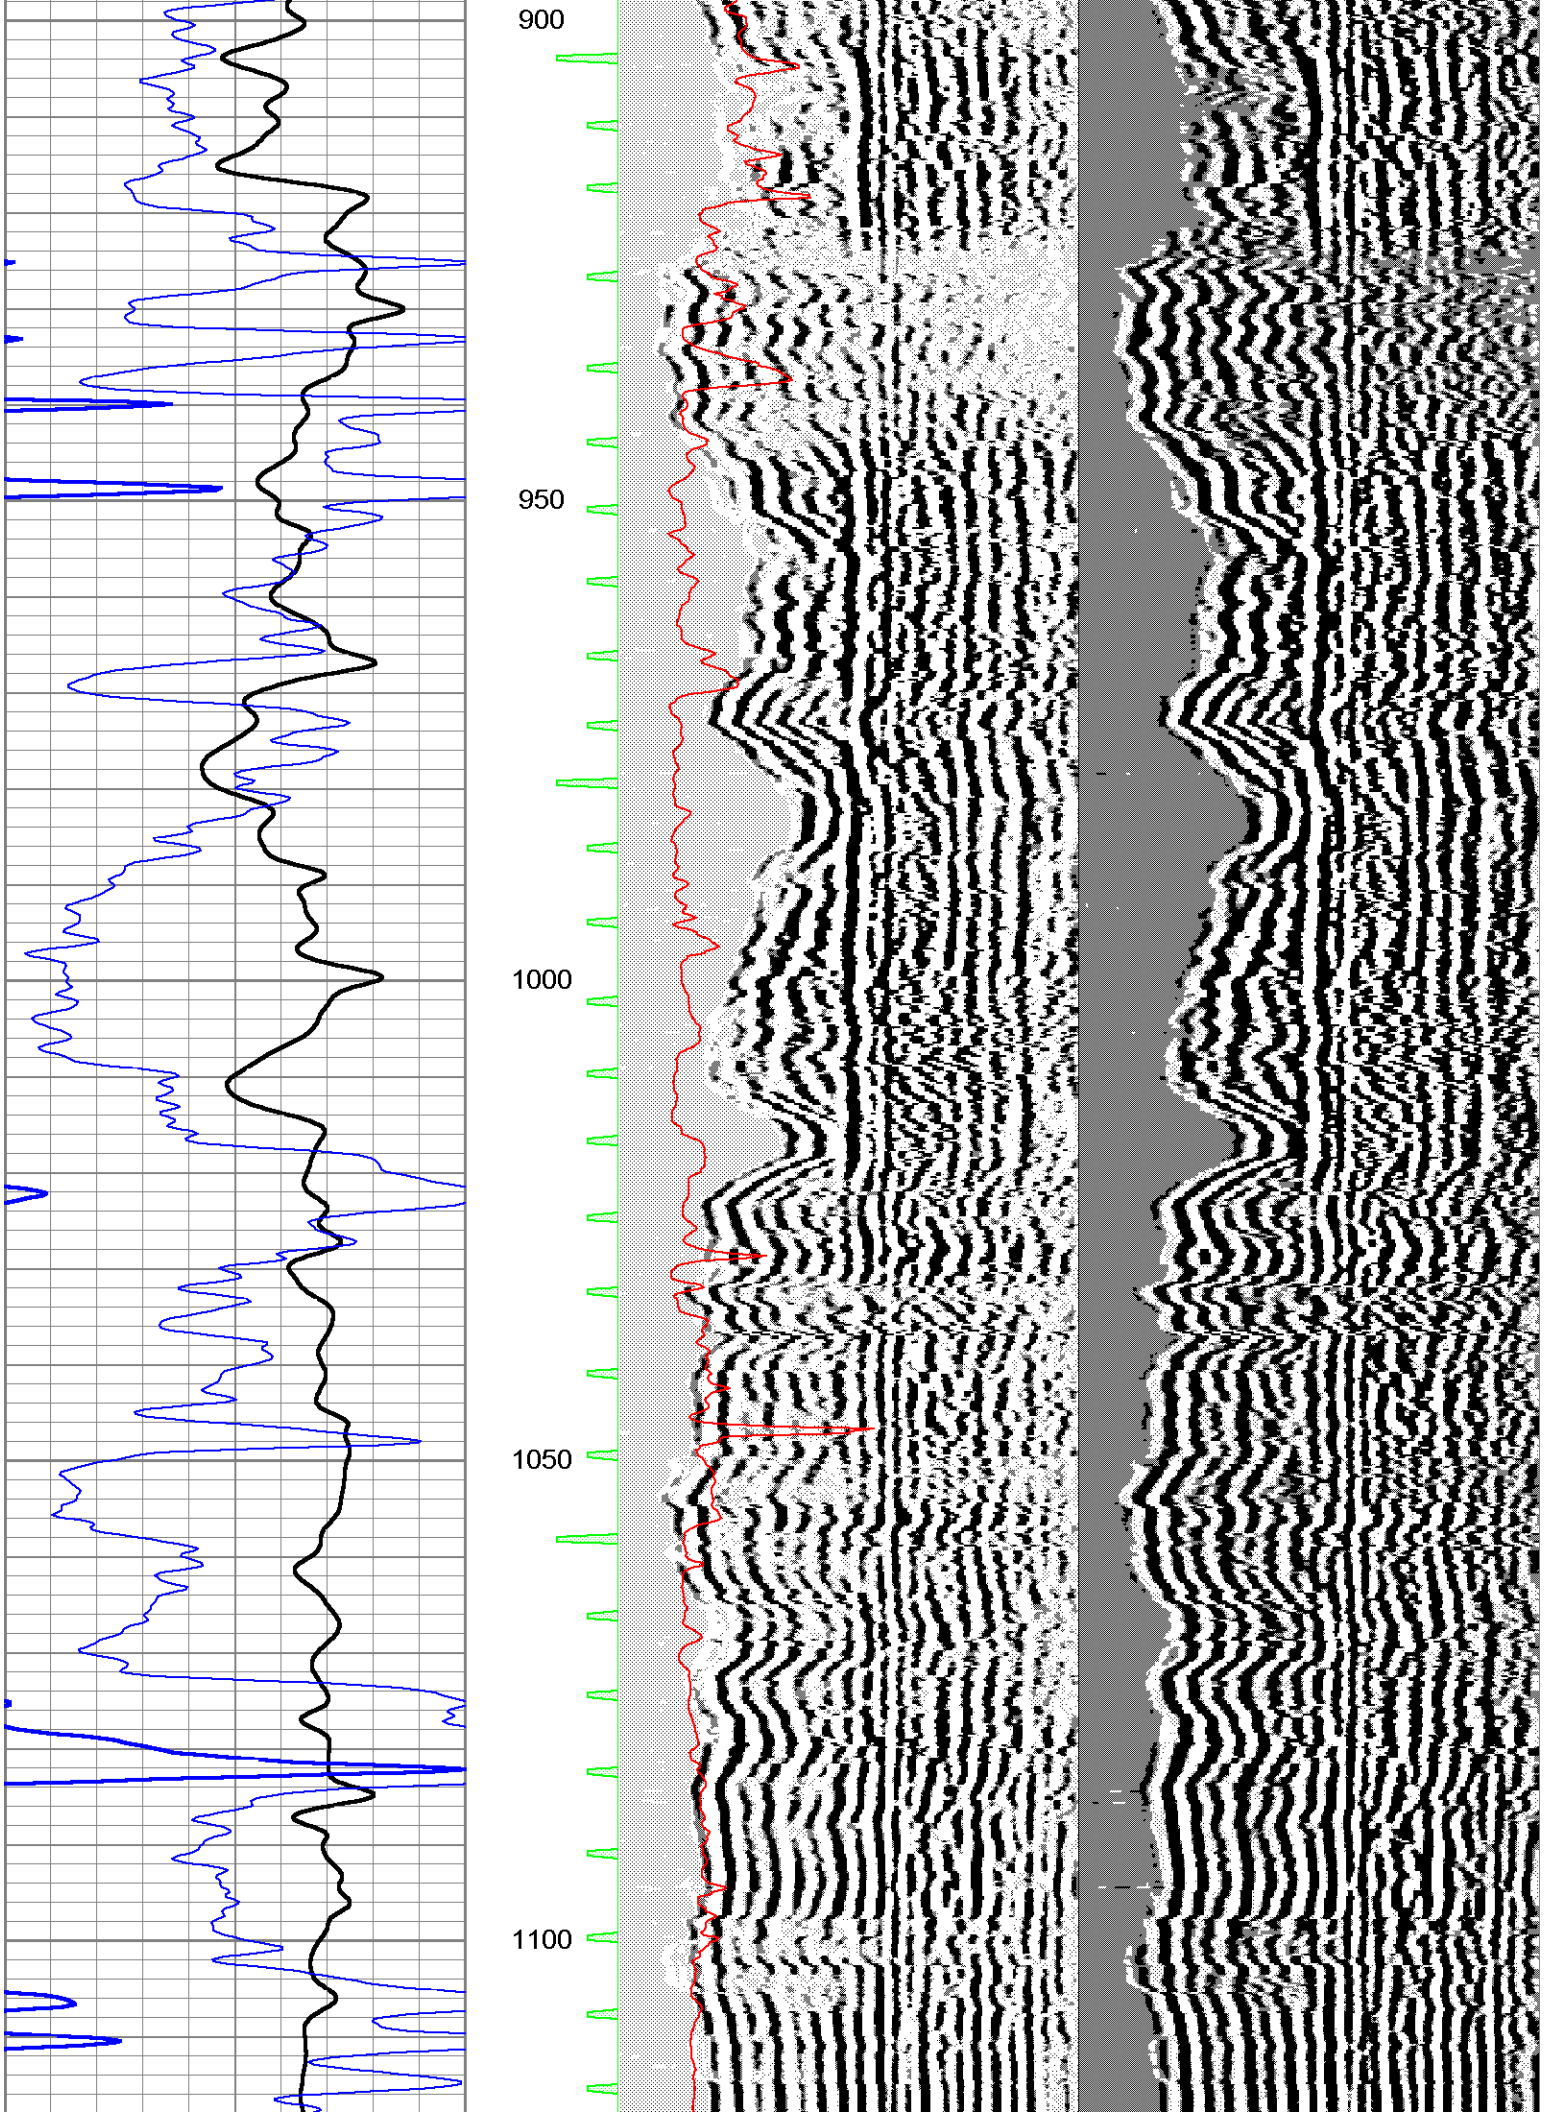
900
950
1000
1050
1100

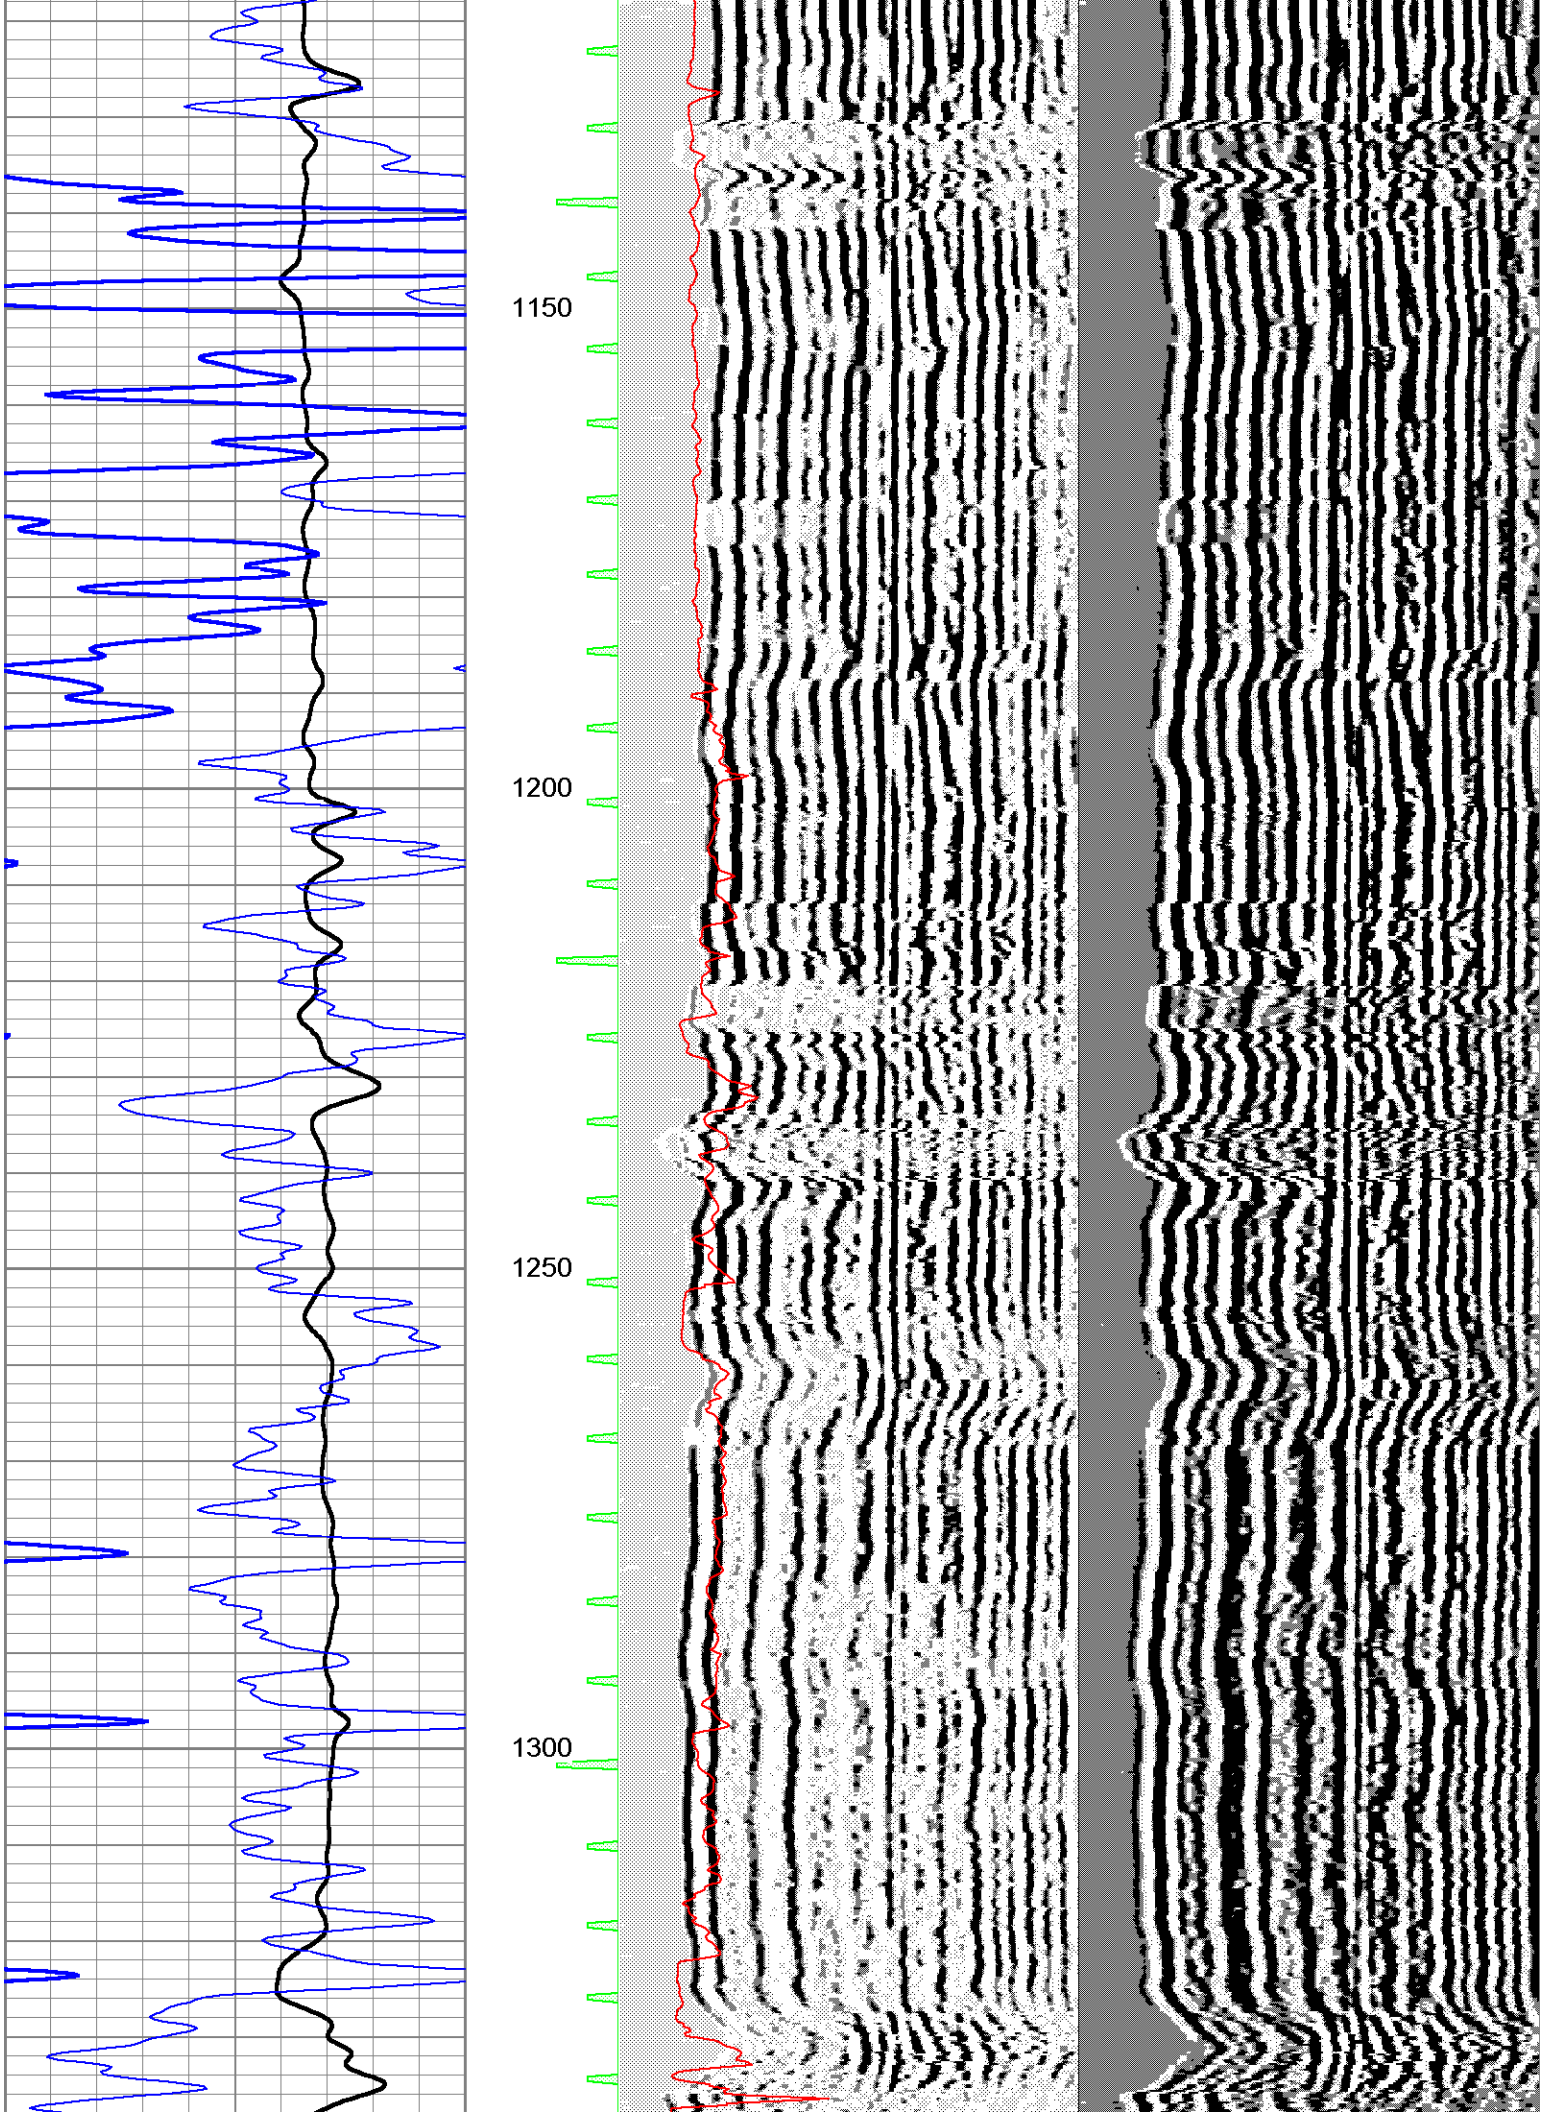
1150
1200
1250
1300

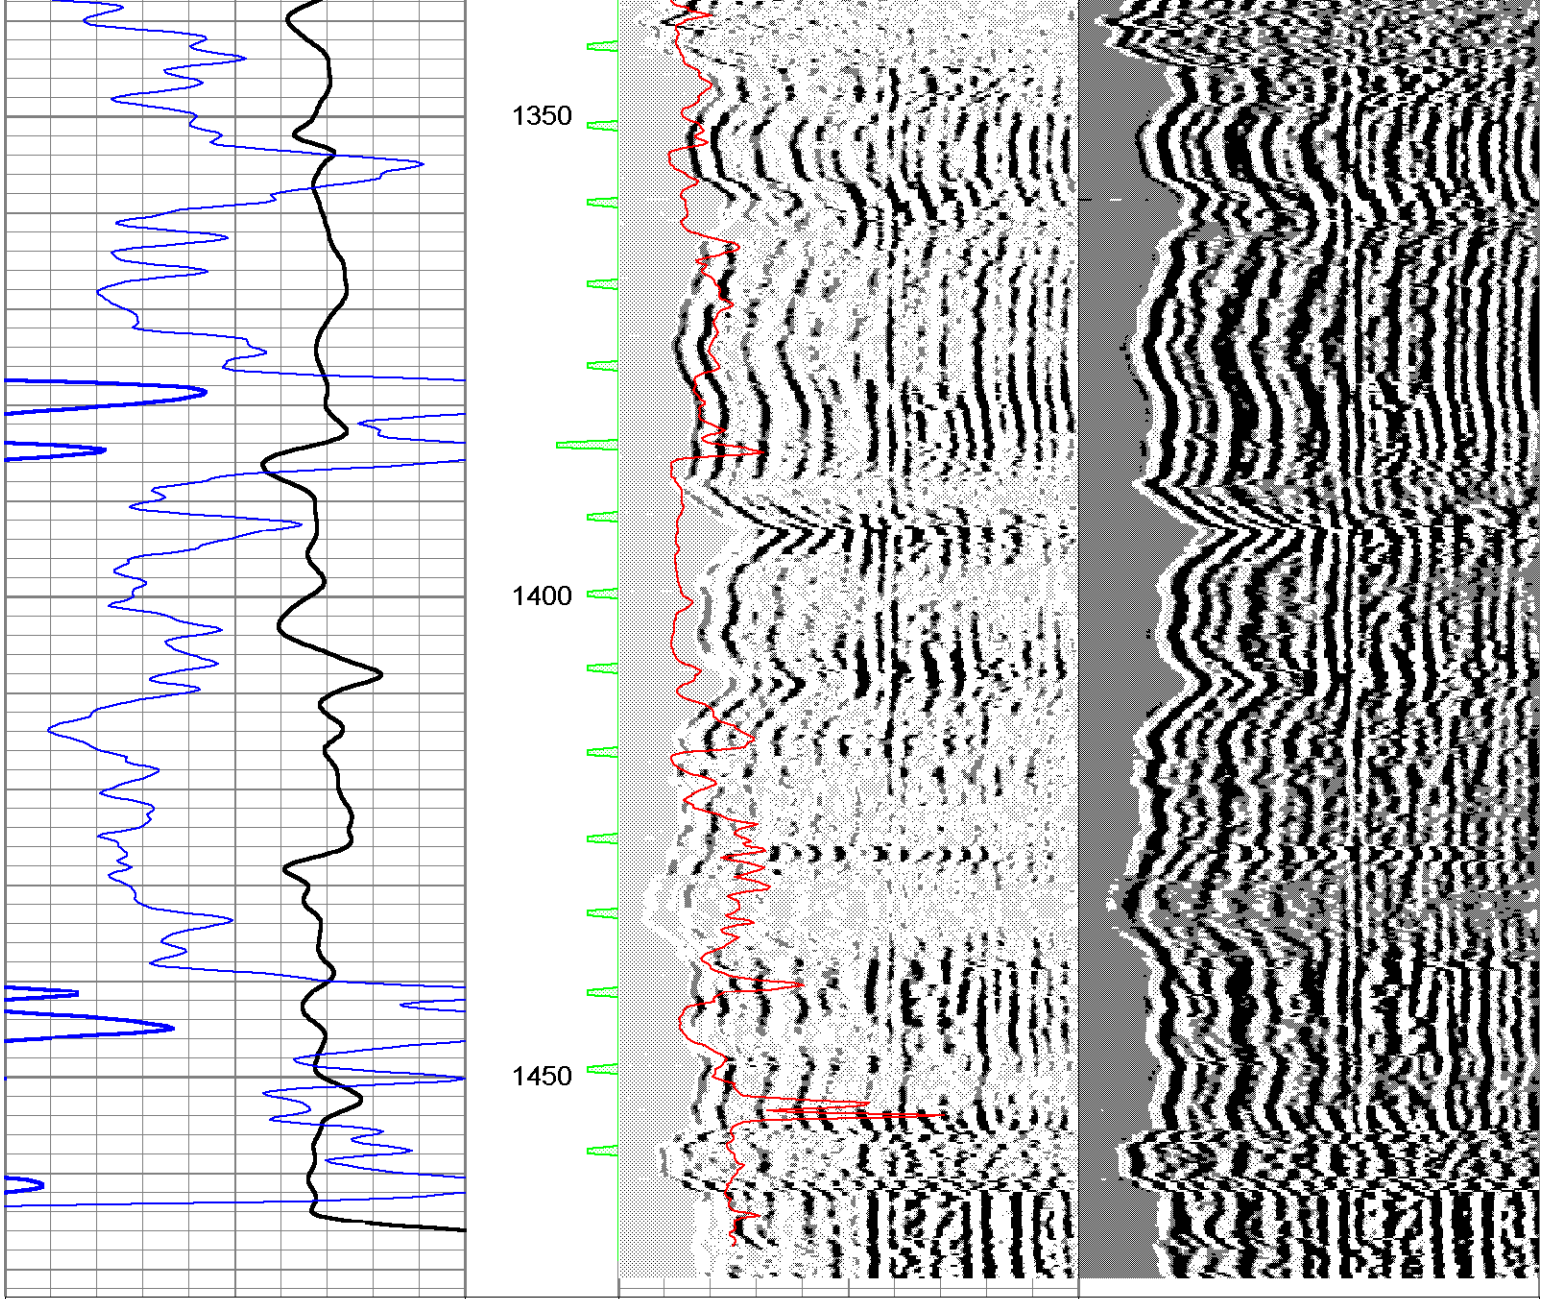

260	DT (usec/ft)	60
150	GR Back-up (GAPI)	250
50	Gamma-Ray (GAPI)	150

ITT (msec)		

500	Variable Density 5 ft	1600
0	RLL3 (Ohm-m)	50
50	RLL3 back-up (Ohm-m)	150

500	Variable Density 5 ft	1600